

z/OS



DFSMSrmm Application Programming Interface

z/OS



DFSMSrmm Application Programming Interface

Note

Before using this information and the product it supports, be sure to read the general information under "Notices" on page 85.

Third Edition, March 2003

This edition applies to Version 1 Release 3 of z/OS™ (5694-A01) and to all subsequent releases and modifications until otherwise indicated in new editions.

This edition replaces SC26-7403-01.

Order publications through your IBM® representative or the IBM branch office serving your locality. Publications are not stocked at the address below.

IBM welcomes your comments. A form for readers' comments may be provided at the back of this publication, or you may address your comments to the following address:

International Business Machines Corporation
RCF Processing, Department G26/050
5600 Cottle Road
San Jose, CA 95193-0001
United States of America

IBMLink™ from US: starpubs@us.ibm.com
IBMLink from Canada: STARPUBS at TORIBM
IBM Mail Exchange: USIB3VVD at IBMMAIL
Internet: starpubs@us.ibm.com

If you would like a reply, be sure to include your name, address, telephone number, or FAX number.

Make sure to include the following in your comment or note:

- Title and order number of this document
- Page number or topic related to your comment

When you send information to IBM, you grant IBM a nonexclusive right to use or distribute the information in any way it believes appropriate without incurring any obligation to you.

© **Copyright International Business Machines Corporation 1992, 2003. All rights reserved.**

US Government Users Restricted Rights – Use, duplication or disclosure restricted by GSA ADP Schedule Contract with IBM Corp.

Contents

Figures	vii
Tables	ix
About This document	xi
Required Product Knowledge	xi
Referenced Documents	xi
Accessing z/OS DFSMS Documents on the Internet	xii
Using LookAt to look up message explanations	xii
Accessing z/OS licensed documents on the Internet	xii
How to Send Your Comments	xiii
Notational Conventions	xiii
How to Read Syntax Diagrams	xiii
How to Abbreviate Commands and Operands	xvi
How to Use Continuation Characters	xvi
Delimiters	xvi
Character Sets	xvi
Summary of Changes	xix
Summary of Changes for SC26-7403-02 z/OS Version 1 Release 3	xix
New Information	xix
Changed Information	xix
Summary of Changes for SC26-7403-01 z/OS Version 1 Release 3	xix
New Information	xix
Changed Information	xix
Chapter 1. Using the DFSMSrmm Application Programming Interface	1
Supported RMM TSO Subcommands	2
Using the EDGXCI Macro	3
EDGXCI: Calling the DFSMSrmm Interface	3
EDGXCI Environment	3
EDGXCI Programming Requirements	3
EDGXCI Syntax	5
EDGXCI Parameters	6
EDGXCI Return and Reason Codes	9
EDGXCI Example	12
Chapter 2. Programming Guidelines	15
Obtaining Resources	15
Specifying TSO Subcommand Input in the EDGXCI Macro	15
Using the CONTINUE Operation in the EDGXCI Macro	15
Using Parameter Lists to Pass Information to the DFSMSrmm API	16
Coding a Single Parameter List, Single Token Area	17
Coding a Single Parameter List, Multiple Token Areas	19
Coding Multiple Parameter List, Single Token Area	21
Coding Multiple Parameter List, Multiple Token Areas	22
Specifying the Option to Free a Resource	23
Specifying the Option to Release a Resource	24
Chapter 3. Receiving Output Data in the Output Buffer	25
Description of Structured Fields	25
Requesting SFI Data Format	26
Requesting Line Format	26

Requesting Field Format	27
Requesting Types of Output	29
Requesting Standard Output	29
Requesting Expanded Output	29
Accessing Return and Reason Codes	30
Accessing Messages and Message Variables	31
Interpreting Date Format and Time Format.	31
Identifying Structured Field Introducers	32
Begin and End Resource Groups	32
System Return and Reason Code SFIs	33
Messages and Message Variables SFIs.	34
SFIs for Output Data for Subcommands.	35
ADD-Type of Subcommands	35
CHANGE-Type of Subcommands	36
DELETE-Type of Subcommands	36
GETVOLUME Subcommand	36
LIST-Type of Subcommands	37
LISTBIN SFIs	37
LISTCONTROL SFIs.	38
LISTDATASET SFIs	41
LISTOWNER SFIs	42
LISTPRODUCT SFIs.	42
LISTRACK SFIs	42
LISTVOLUME SFIs	43
LISTVRS SFIs	45
SEARCH-Type of Subcommands	45
SEARCHBIN SFIs.	46
SEARCHDATASET SFIs	46
SEARCHPRODUCT SFIs	46
SEARCHRACK SFIs.	47
SEARCHVOLUME SFIs	47
SEARCHVRS SFIs	48
Controlling Output from List and Search Type Requests	49
Limiting the Search for a Request	49
Output Buffer Examples	49
Appendix A. Structured Field Introducers	53
SFI Format	53
Structured Field Lengths	53
SFIs for Begin and End Resource Groups	54
SFIs for Return and Reason Codes	54
SFIs for Messages and Message Variables	55
SFIs for Subcommand Output Data	56
Appendix B. Structured Field Introducers by Subcommand	71
Appendix C. DFSMSrmm Application Programming Interface Mapping	
Macros	73
EDGXCI: Parameter List	73
EDGXSF: Structured Field Definitions	74
EDGXSF Parameters	74
EDGXSF Mapping	75
EDGXSF Labeling Conventions.	75
Appendix D. Hexadecimal Example of an Output Buffer	79
Hexadecimal Representation of an Output Buffer	79

Description of the Contents of an Output Buffer	79
Processing the Contents of an Output Buffer	81
Appendix E. Accessibility	83
Using assistive technologies	83
Keyboard navigation of the user interface	83
Notices	85
Programming Interface Information	86
Trademarks	86
Glossary	87
Index	99

Figures

1. EDGXCI Macro Syntax Diagram	5
2. Communicating with the DFSMSrmm API	12
3. Example of Specifying the DFSMSrmm API Subcommand	15
4. Example of Specifying the RMM TSO Subcommand	15
5. Single Parameter List, Single Token Area	18
6. Single Parameter List, Multiple Token Areas	19
7. Releasing All Resources	20
8. Multiple Parameter Lists, Single Token Area	21
9. Multiple Parameter Lists, Multiple Token Area	22
10. TOKEN= Specified on EDGXCI	24
11. TOKEN= Not Specified on EDGXCI	24
12. Example of List Type of Output Using OUTPUT=LINES	27
13. Example of Output Using OUTPUT=FIELDS	27
14. Example of Search Type of Output Using EXPAND=NO	29
15. Example of Search Type of Output Using OUTPUT=FIELDS, EXPAND=YES	30
16. Message and Message Variable Structured Fields	31
17. Begin and End Resource Group SFI Sequence	32
18. Begin and End Resource Group SFI Pairs	33
19. Begin and End Resource Group SFI Pairs for Subgroups	33
20. System Return and Reason Codes	33
21. SFIs for Messages and Message Variables	34
22. Formatted Lines	35
23. SFIs for ADDVOLUME with OUTPUT=FIELDS	36
24. SFIs for CHANGEVOLUME with OUTPUT=FIELDS	36
25. SFIs for GETVOLUME with OUTPUT=FIELDS	37
26. SFIs for LISTBIN with OUTPUT=FIELDS	37
27. SFIs for LISTCONTROL with OUTPUT=FIELDS	38
28. SFIs for LISTDATASET with OUTPUT=FIELDS	41
29. SFIs for LISTOWNER with OUTPUT=FIELDS	42
30. SFIs for LISTPRODUCT with OUTPUT=FIELDS	42
31. SFIs for LISTRACK with OUTPUT=FIELDS	42
32. SFIs for LISTVOLUME with OUTPUT=FIELDS	43
33. SFIs for LISTVRS with OUTPUT=FIELDS	45
34. SFIs for SEARCHBIN with OUTPUT=FIELDS,EXPAND=NO	46
35. SFIs for SEARCHDATASET with OUTPUT=FIELDS,EXPAND=NO	46
36. SFIs for SEARCHPRODUCT with OUTPUT=FIELDS,EXPAND=NO	47
37. SFIs for SEARCHRACK with OUTPUT=FIELDS,EXPAND=NO	47
38. SFIs for SEARCHVOLUME with OUTPUT=FIELDS,EXPAND=NO	48
39. SFIs for SEARCHVRS with OUTPUT=FIELDS,EXPAND=NO	48
40. CONTINUE Example, First Output Buffer	50
41. CONTINUE Example, Second Output Buffer	51
42. CONTINUE Example, Third (Last) Output Buffer	51
43. Mapping of the Parameter List Using the List Form of EDGXCI	73
44. Mapping: Output Buffer and Structured Field Introducers	75
45. Mapping of the Begin and End ACCESS Group	76
46. Mapping of the Begin and End VOL Group	76
47. Mapping of the ATM SFI	76
48. Mapping of the ACT SFI	77
49. Mapping of the LOCT SFI	77
50. Hexadecimal Representation of the Contents of an Output Buffer	79
51. Output Buffer Definition	81
52. SFI Definition	81

Tables

1. Character Sets	xvi
2. Special Characters Used in Syntax	xvii
3. RMM TSO Subcommands	2
4. Return and Reason Codes for the EDGXCI Macro	10
5. Return Codes and Reason Codes Issued when You Specify OPERATION=CONTINUE	16
6. Types of Parameter Lists	17
7. Message Related SFIs.	34
8. Begin and End Group Structured Field Introducers	54
9. Reason and Return Code SFIs	55
10. Message SFIs	55
11. Command SFIs	56
12. Structured Field Introducers by Subcommand	71

About This document

This document is intended for application programmers who use the DFSMSrmm™ application programming interface to obtain information about resources that are managed by DFSMSrmm.

Refer to:

- Chapter 1, “Using the DFSMSrmm Application Programming Interface”, on page 1 for information on the EDGXCI macro you use for communication between your application program and DFSMSrmm.
- Chapter 2, “Programming Guidelines”, on page 15 for guidelines for using the application programming interface.
- Chapter 3, “Receiving Output Data in the Output Buffer”, on page 25 for information on the data that the DFSMSrmm application programming interface returns.

For information about the accessibility features of z/OS, for users who have a physical disability, see Appendix E, “Accessibility”, on page 83.

Required Product Knowledge

To use this document effectively, you should be familiar with:

- The RMM TSO subcommand and operands
- Macros to communicate between programs

Referenced Documents

The following publications have additional information about DFSMSrmm:

Publication Title	Order Number
<i>z/OS DFSMSrmm Command Reference Summary</i>	SX26-6022
<i>z/OS DFSMSrmm Diagnosis Guide</i>	SY27-7619
<i>z/OS DFSMSrmm Guide and Reference</i>	SC26-7404
<i>z/OS DFSMSrmm Implementation and Customization Guide</i>	SC26-7405
<i>z/OS DFSMSrmm Reporting</i>	SC26-7406

This document also refers to the following publications:

Publication Title	Order Number
<i>z/OS MVS System Messages, Vol 1 (ABA-AOM)</i>	SA22-7631
<i>z/OS MVS System Messages, Vol 2 (ARC-ASA)</i>	SA22-7632
<i>z/OS MVS System Messages, Vol 3 (ASB-BPX)</i>	SA22-7633
<i>z/OS MVS System Messages, Vol 4 (CBD-DMO)</i>	SA22-7634
<i>z/OS MVS System Messages, Vol 5 (EDG-GFS)</i>	SA22-7635
<i>z/OS MVS System Messages, Vol 6 (GOS-IEA)</i>	SA22-7636
<i>z/OS MVS System Messages, Vol 7 (IEB-IEE)</i>	SA22-7637
<i>z/OS MVS System Messages, Vol 8 (IEF-IGD)</i>	SA22-7638
<i>z/OS MVS System Messages, Vol 9 (IGF-IWM)</i>	SA22-7639

Accessing z/OS DFSMS Documents on the Internet

In addition to making softcopy documents available on CD-ROM, IBM provides access to unlicensed z/OS softcopy documents on the Internet. To find z/OS documents on the Internet, first go to the z/OS home page:
<http://www.ibm.com/servers/eserver/zseries/zos>

From this Web site, you can link directly to the z/OS softcopy documents by selecting the Library icon. You can also link to IBM Direct to order printed documentation.

Using LookAt to look up message explanations

LookAt is an online facility that allows you to look up explanations for most messages you encounter, as well as for some system abends and codes. Using LookAt to find information is faster than a conventional search because in most cases LookAt goes directly to the message explanation.

You can access LookAt from the Internet at:
<http://www.ibm.com/eserver/zseries/zos/bkserv/lookat/>

Alternatively, you can access LookAt from anywhere in z/OS where you can access a TSO/E command line (for example, TSO/E prompt, ISPF, z/OS UNIX System Services running OMVS). You can also download code from the *z/OS Collection* (SK3T-4269) and the LookAt Web site that will allow you to access LookAt from a handheld computer (Palm Pilot VIIx suggested).

To use LookAt as a TSO/E command, you must have LookAt installed on your host system. You can obtain the LookAt code for TSO/E from a disk on your *z/OS Collection* (SK3T-4269) or from the **News** section on the LookAt Web site.

Some messages have information in more than one document. For those messages, LookAt displays a list of documents in which the message appears.

Accessing z/OS licensed documents on the Internet

z/OS licensed documentation is available on the Internet in PDF format at the IBM Resource Link™ Web site at: <http://www.ibm.com/servers/resourcelink>

Licensed documents are available only to customers with a z/OS license. Access to these documents requires an IBM Resource Link user ID and password, and a key code. With your z/OS order you received a Memo to Licensees, (GI10-0671), that includes this key code.

To obtain your IBM Resource Link user ID and password, log on to:
<http://www.ibm.com/servers/resourcelink>

To register for access to the z/OS licensed documents:

1. Sign in to Resource Link using your Resource Link user ID and password.
2. Select **User Profiles** located on the left-hand navigation bar.

Note: You cannot access the z/OS licensed documents unless you have registered for access to them and received an e-mail confirmation informing you that your request has been processed.

Printed licensed documents are not available from IBM.

You can use the PDF format on either **z/OS Licensed Product Library CD-ROM** or IBM Resource Link to print licensed documents.

How to Send Your Comments

Your feedback is important in helping to provide the most accurate and high-quality information. If you have any comments about this document or any other DFSMS documentation:

- Send your comments by e-mail to:
 - IBMLink™ from US: starpubs@us.ibm.com
 - IBMLink from Canada: STARPUBS at TORIBM
 - IBM Mail Exchange: USIB3VVD at IBMMAIL
 - Internet: starpubs@us.ibm.com

Be sure to include the name of the document, the order number of the document, version and product name, and if applicable, the specific location of the text you are commenting on (for example, a page number or a table number).

- Fill out one of the forms at the back of this document and return it by mail or by giving it to an IBM representative. If the form has been removed, address your comments to IBM Corporation, RCF Processing Department M86/050, 5600 Cottle Road, San Jose, California 95193-0001, U.S.A.


Notational Conventions

This section explains the notational conventions used in this document.


How to Read Syntax Diagrams


Throughout this library, diagrams are used to illustrate the programming syntax. Keyword parameters are parameters that follow the positional parameters. Unless otherwise stated, keyword parameters can be coded in any order. The following list tells you how to interpret the syntax diagrams:

- Read the diagrams from left-to-right, top-to-bottom, following the main path line. Each diagram begins on the left with double arrowheads and ends on the right with two arrowheads facing each other.




- If a diagram is longer than one line, each line to be continued ends with a single arrowhead and the next line begins with a single arrowhead.





- Required keywords and values appear on the main path line. You must code required keywords and values.



If several mutually exclusive required keywords or values exist, they are stacked vertically in alphanumeric order.




- Optional keywords and values appear below the main path line. You can choose not to code optional keywords and values.




If several mutually exclusive optional keywords or values exist, they are stacked vertically in alphanumeric order below the main path line.



- An arrow returning to the left above a keyword or value on the main path line means that the keyword or value can be repeated. The comma means that each keyword or value must be separated from the next by a comma.



- An arrow returning to the left above a group of keywords or values means more than one can be selected, or a single one can be repeated.

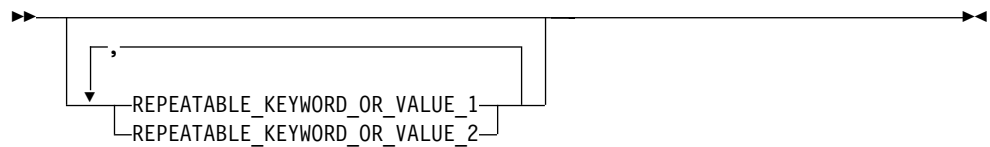

- A word in all uppercase is a keyword or value you must spell exactly as shown. In this example, you must code **KEYWORD**.



If a keyword or value can be abbreviated, the abbreviation is discussed in the text associated with the syntax diagram.

- If a diagram shows a character that is not alphanumeric (such as parentheses, periods, commas, and equal signs), you must code the character as part of the syntax. In this example, you must code **KEYWORD=(001,0.001)**.

▶▶—KEYWORD=(001,0.001)—————▶▶

- If a diagram shows a blank space, you must code the blank space as part of the syntax. In this example, you must code **KEYWORD=(001 FIXED)**.

▶▶—KEYWORD=(001 FIXED)—————▶▶

- Default keywords and values appear above the main path line. If you omit the keyword or value entirely, the default is used.

▶▶—DEFAULT
KEYWORD—————▶▶

- A word in all lowercase italics is a *variable*. Where you see a variable in the syntax, you must replace it with one of its allowable names or values, as defined in the text.

▶▶—*variable*⁽¹⁾—————▶▶

Notes:

1 An example of a syntax note.

- References to syntax notes appear as numbers enclosed in parentheses above the line. Do not code the parentheses or the number.

▶▶—KEYWORD—————▶▶

- Some diagrams contain *syntax fragments*, which serve to break up diagrams that are too long, too complex, or too repetitious. Syntax fragment names are in mixed case and are shown in the diagram and in the heading of the fragment. The fragment is placed below the main diagram.

▶▶—| Reference to Syntax Fragment |—————▶▶

Syntax Fragment:

|—1ST_KEYWORD,2ND_KEYWORD,3RD_KEYWORD—————|

The following is an example of a syntax diagram.

▶▶—DELETEOWNER—*owner_ID*—DO—newowner—————▶▶

newowner

(1)
|—NEWOWNER(*new_owner_ID*)—|

Notes:

- 1 Must be specified if the owner owns one or more volumes.

The possible valid versions of the RMM DELETEOWNER command are:

```
RMM DELETEOWNER owner
RMM DO          owner
RMM DELETEOWNER owner NEWOWNER(new_owner)
RMM DO          owner NEWOWNER(new_owner)
```

How to Abbreviate Commands and Operands

The TSO abbreviation convention applies for all DFSMSrmm commands and operands. The TSO abbreviation convention requires you to specify as much of the command name or operand as is necessary to distinguish it from the other command names or operands.

Some DFSMSrmm keyword operands allow unique abbreviations. All unique abbreviations are shown in the command syntax diagrams.

How to Use Continuation Characters

The symbol - is used as the continuation character in this document. You can use either - or +.

- Do not ignore leading blanks on the continuation statement
- + Ignore leading blanks on the continuation statement

Delimiters

When you type a command, you must separate the command name from the first operand by one or more blanks. You must separate operands by one or more blanks or a comma. Do not use a semicolon as a delimiter because any character you enter after a semicolon is ignored.

Character Sets

To code job control statements, use characters from the character sets in Table 1. Table 2 on page xvii lists the special characters that have syntactical functions in job control statements.

Table 1. Character Sets

Character Set	Contents	
Alphanumeric	Alphabetic Numeric	Capital A through Z 0 through 9
National (See note)	“At” sign Dollar sign Pound sign	@ (Characters that can be \$ represented by hexadecimal # values X'7C', X'5B', and X'7B')

Table 1. Character Sets (continued)

Character Set	Contents	
Special	Comma Period Slash Apostrophe Left parenthesis Right parenthesis Asterisk Ampersand Plus sign Hyphen Equal sign Blank	, . / ' () * & + - =
EBCDIC text	EBCDIC printable character set	Characters that can be represented by hexadecimal X'40' through X'FE'
<p>Note: The system recognizes the following hexadecimal representations of the U.S. National characters; @ as X'7C'; \$ as X'5B'; and # as X'7B'. In countries other than the U.S., the U.S. National characters represented on terminal keyboards might generate a different hexadecimal representation and cause an error. For example, in some countries the \$ character may generate a X'4A'.</p>		

Table 2. Special Characters Used in Syntax

Character	Syntactical Function
,	To separate parameters and subparameters
=	To separate a keyword from its value, for example, BURST=YES
(b)	To enclose subparameter list or the member name of a PDS or PDSE
&	To identify a symbolic parameter, for example, &LIB
&&	To identify a temporary data set name, for example, &&TEMPDS, and, to identify an in-stream or sysout data set name, for example, &&PAYOUT
.	To separate parts of a qualified data set name, for example, A.B.C., or parts of certain parameters or subparameters, for example, nodename.userid
*	To refer to an earlier statement, for example, OUTPUT=*name, or, in certain statements, to indicate special functions: //label CNTL * //ddname DD * RESTART=* on the JOB statement
'	To enclose specified parameter values which contain special characters
(blank)	To delimit fields

Summary of Changes

This document contains terminology, maintenance, and editorial changes. Technical changes or additions to the text and illustrations are indicated by a vertical line to the left of the change.

Summary of Changes for SC26-7403-02 z/OS Version 1 Release 3

This document contains information previously presented in *z/OS Version 1 Release 3 DFSMSrmm Application Programming Interface (SC26-7403-01)*.

The following sections summarize the changes to that information.

New Information

This edition includes new structured field introducers as part of these DFSMSrmm functions:

- DFSMSrmm back up at anytime
- DFSMSrmm duplicate volume serial number
- DFSMSrmm command authorization by data set name
- DFSMSrmm IBM TotalStorage Enterprise Tape System 3590 Model H1x

Changed Information

Output examples have been updated to show the new structured field introducers.

You might notice changes in the style and structure of some content in this document--for example, headings that are more task-oriented, notes with headings that are more specific and clear in their intent, additional index entries for easier information retrieval, and procedures that have a different look and format. The changes are ongoing improvements to the consistency and retrievability of information in our documents.

Summary of Changes for SC26-7403-01 z/OS Version 1 Release 3

This document contains information previously presented in *z/OS Version 1 Release 1 DFSMSrmm Application Programming Interface (SC26-7403-00)*.

The following sections summarize the changes to that information.

New Information

This edition includes new structured field introducers as part of these DFSMSrmm functions:

- DFSMSrmm pooling control enhancements
- DFSMSrmm support for multiple systems and platforms
- DFSMSrmm bin management enhancements

Changed Information

Output examples have been updated to show the new structured field introducers.

You might notice changes in the style and structure of some content in this document--for example, headings that are more task-oriented, notes with headings that are more specific and clear in their intent, additional index entries for easier

information retrieval, and procedures that have a different look and format. The changes are ongoing improvements to the consistency and retrievability of information in our documents.

Chapter 1. Using the DFSMSrmm Application Programming Interface

DFSMSrmm is a z/OS® feature. Use the DFSMSrmm application programming interface (API) to read, extract, and update data in the DFSMSrmm control data set. You can use the data to create reports or implement automation.

Use macro EDGXCI as described in “EDGXCI: Calling the DFSMSrmm Interface” on page 3 to define a parameter list to call the DFSMSrmm application programming interface. Use macro EDGXCI to pass any supported RMM TSO subcommand to DFSMSrmm. See “Supported RMM TSO Subcommands” on page 2 for a list of supported RMM TSO subcommands. Figure 2 on page 12 is an example you can modify to communicate with the DFSMSrmm application programming interface.

Use macro EDGXSF as described in “EDGXSF: Structured Field Definitions” on page 74 to help you process the data that the DFSMSrmm application programming interface returns. The DFSMSrmm application programming interface returns data as structured fields in an output buffer that you define. Structured fields consist of these parts.

- A structured field introducer (SFI) that introduces the type of data, length, and characteristics of the data that the API returns,
- Data.

You can request that the API returns data in line format or field format as described in “Requesting SFI Data Format” on page 26. You can also request standard output or expanded output as described in “Requesting Types of Output” on page 29.

To use the DFSMSrmm application programming interface, you must have High Level Assembler installed on your system. *z/OS Planning for Installation* provides information about the level of High Level Assembler required for DFSMS.

Supported RMM TSO Subcommands

The DFSMSrmm API supports all the RMM TSO subcommands as shown in Table 3.

Table 3. RMM TSO Subcommands

Group	Subcommand	Abbrev	Function
Add	ADDBIN	AB	Add bin number information
	ADDDATASET	AD	Add data set information
	ADDOWNER	AO	Add owner information
	ADDPRODUCT	AP	Add software product information
	ADDRACK	AR	Add shelf location information
	ADDVOLUME	AV	Add volume information
	ADDVRS	AS	Add a vital record specification
Change	CHANGEDATASET	CD	Change data set information
	CHANGEOWNER	CO	Change owner information
	CHANGEPRODUCT	CP	Change software product information
	CHANGEVOLUME	CV	Change volume information
Delete	DELETEBIN	DB	Delete bin number information
	DELETEDATASET	DD	Delete data set information
	DELETEOWNER	DO	Delete owner information
	DELETEPRODUCT	DP	Delete software product information
	DELETERACK	DR	Delete shelf location information
	DELETEVOLUME	DV	Release a volume and delete volume
	DELETEVRS	DS	Delete a vital record specification information
Get	GETVOLUME	GV	Request or assign a volume
List	LISTBIN	LB	Display bin number information
	LISTCONTROL	LC	Display PARMLIB options and control information
	LISTDATASET	LD	Display data set information
	LISTOWNER	LO	Display owner information
	LISTPRODUCT	LP	Display software product information
	LISTRACK	LR	Display shelf location information
	LISTVOLUME	LV	Display volume information
	LISTVRS	LS	Display vital record specification information
Search	SEARCHBIN	SB	Create a list of bin numbers
	SEARCHDATASET	SD	Create a list of data sets
	SEARCHPRODUCT	SP	Create a list of software products
	SEARCHRACK	SR	Create a list of rack numbers
	SEARCHVOLUME	SV	Create a list of volumes
	SEARCHVRS	SS	Create a list of vital record specifications

Refer to *z/OS DFSMSrmm Guide and Reference* for details on these subcommands.

Rule: When you use the DFSMSrmm application programming interface, you must specify the subcommand as a single, continuous string of characters rather than as multiple input lines.

Using the EDGXCI Macro

Follow these steps to obtain information from DFSMSrmm using the EDGXCI macro.

1. Use EDGXCI MF=(L,addr) to save space in your dynamic area for the parameter list.
2. Save the address of an output buffer that the application programming interface uses.
3. Load the DFSMSrmm API module, EDGXAPI, and then save the address of the module.
4. Create the subcommand that you want to process.
5. Use the EDGXCI macro to complete the parameter list and call the DFSMSrmm application programming interface.
6. Use EDGXCI with OPERATION=CONTINUE as needed to get more data for the current subcommand.
7. Use EDGXCI with OPERATION=RELEASE to free resources that are obtained by the DFSMSrmm API module.
8. Delete the EDGXAPI module that you loaded.

EDGXCI: Calling the DFSMSrmm Interface

Use the EDGXCI macro in your application program (the caller) to:

- Define a parameter list.
- Set parameters in the list.
- Change parameters in the list.
- Call the DFSMSrmm application programming interface module, EDGXAPI.

EDGXCI Environment

The requirements for the caller are:

Minimum authorization:	Non-APF authorized, problem state and key (0-8).
Dispatchable unit mode:	Task
Cross memory mode:	PASN=HASN=SASN
AMODE:	31-bit
ASC mode:	Primary
Interrupt status:	Enabled for I/O and external interrupts
Locks:	The caller must not be locked.
Control parameters:	Control parameters must be in the primary address space.

EDGXCI Programming Requirements

The caller must load the DFSMSrmm API module, EDGXAPI, prior to using the execute or standard form of EDGXCI. The caller must delete EDGXAPI when the DFSMSrmm API is no longer needed.

The caller should also use the EDGXSF macro to define the structured fields that are used in the output.

See Appendix C, “DFSMSrmm Application Programming Interface Mapping Macros”, on page 73 for a complete description of the EDGXCI and EDGXSF macros.

EDGXCI Restrictions

The caller must not have functional recovery routines (FRRs) established.

EDGXCI Input Register Information

Before issuing the EDGXCI macro, ensure that the following general purpose registers (GPRs) contain the specified information:

Register	Contents
13	The address of a 72-byte standard save area in the primary address space

Before issuing the EDGXCI macro, no information is needed in any access register (AR) unless the access register is used in register notation for a particular parameter or as a base register.

EDGXCI Output Register Information

When control returns to the caller, the GPRs contain:

Register	Contents
0	Reason code
1	Used as a work register by the system
2-13	Unchanged
14	Used as a work register by the system
15	Return code

When control returns to the caller, the ARs contain:


Register	Contents
0-1	Used as work registers by the system
2-13	Unchanged
14-15	Used as work registers by the system

Some callers depend on register contents that remain the same before and after issuing a service. If the system changes the contents of registers on which the caller depends, the caller must save them before issuing the service, and restore them after the system returns control.


EDGXCI Syntax

Figure 1 shows the syntax for the EDGXCI macro. You can use this macro to communicate with the DFSMSrmm application programming interface.

EDGXCI Macro

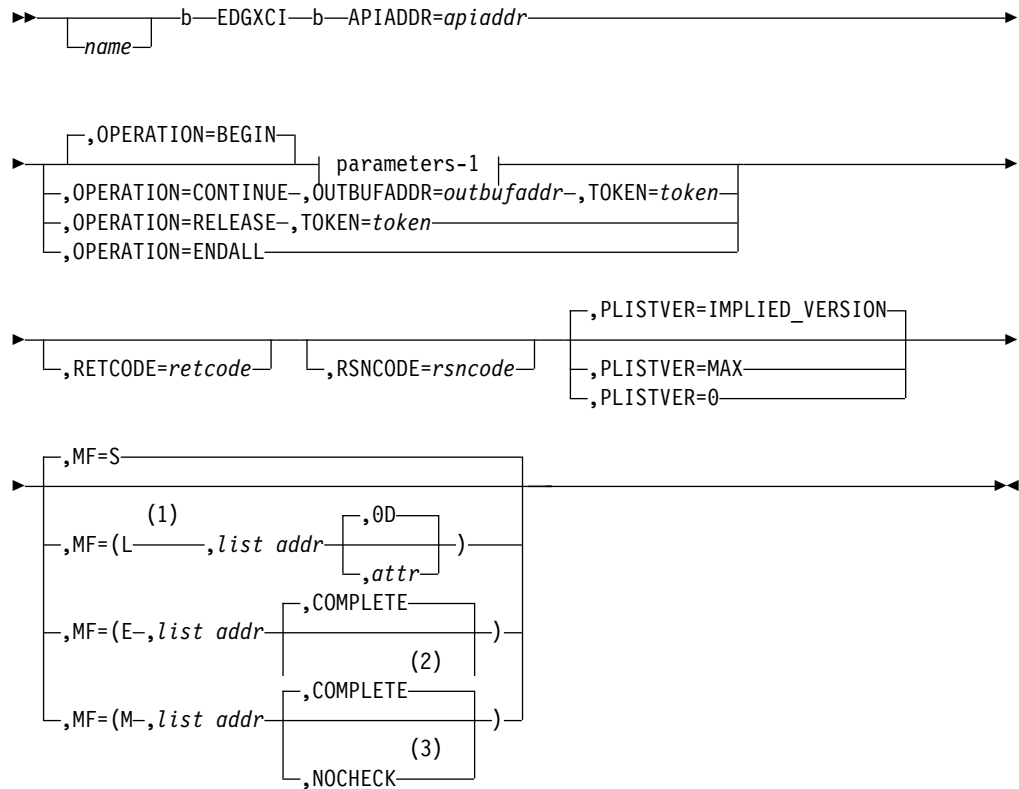

parameters-1:

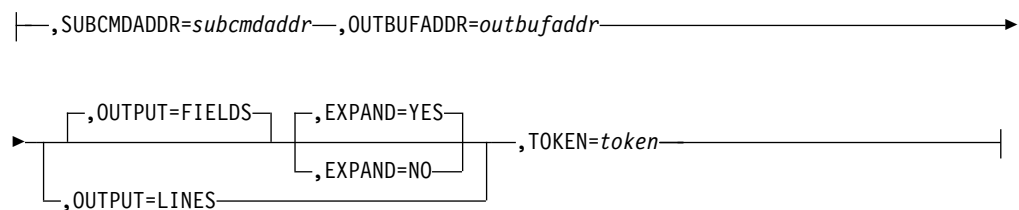

Notes:

- 1 Only the PLISTVER parameter can be coded with MF=L.
- 2 When NOCHECK is specified with MF=E, all parameters are optional and the system does not supply defaults for omitted optional parameters.
- 3 When NOCHECK is specified with MF=M, all parameters are optional and the system does not supply defaults for omitted optional parameters.

Figure 1. EDGXCI Macro Syntax Diagram

EDGXCI Parameters

You can specify these parameters:

name

An optional symbol that starts in column 1. This is the name on the EDGXCI macro call. The name must conform to the rules for an ordinary assembler language symbol.

APIADDR=apiaddr

A required input parameter that contains the address of the DFSMSrmm API load module. The calling program is responsible for loading the DFSMSrmm API load module, saving, and then using the returned load address. Use the MVS™ LOAD service to obtain the DFSMSrmm API address.

To code: Specify the RS-type address, or address in register (2)-(12), of a pointer field.

,EXPAND=YES

,EXPAND=NO

When OUTPUT=FIELDS and OPERATION=BEGIN are specified, EXPAND is an optional parameter that specifies whether to expand the number of returned data fields to be the same as for the corresponding list type of subcommand. The default is EXPAND=YES.

,EXPAND=YES

Specify to expand the number of data fields to be the same as the corresponding list type of subcommand.

,EXPAND=NO

Specify to not expand the number of data fields for the subcommand.

,MF=S

,MF=(L,list addr)

,MF=(L,list addr,attr)

,MF=(L,list addr,OD)

,MF=(E,list addr)

,MF=(E,list addr,COMPLETE)

,MF=(E,list addr,NOCHECK)

,MF=(M,list addr)

,MF=(M,list addr,COMPLETE)

,MF=(M,list addr,NOCHECK)

An optional input parameter that specifies the macro form.

Use MF=S to specify the standard form of the macro. This builds an inline parameter list and generates the macro invocation to transfer control to the service. MF=S is the default.

Use MF=L to specify the list form of the macro. Use the macro list form with the macro execute form for applications that require reentrant code. The list form defines an area of storage that the execute form uses to store the parameters. Only the PLISTVER parameter can be coded with the list form of the macro.

Use MF=E to specify the execute form of the macro. Use the execute form together with the list form of the macro for applications that require reentrant code. The execute form of the macro stores the parameters into the storage area defined by the list form and generates the macro invocation to transfer control to the service.

Use MF=M together with the list form and execute form of the macro for service routines that need to provide different options according to user-provided input.

Use the list form to define a storage area. Use the modify form to set the appropriate options. Then use the execute form to call the service.

Recommendation: Use the modify and execute forms of EDGXCI in the following order:

1. Use EDGXCI ...MF=(M,list-addr,COMPLETE) and specify all the required parameters and any appropriate optional parameters.
2. Use EDGXCI ...MF=(M,list-addr,NOCHECK) and specify the parameters that you want to change.
3. Use EDGXCI ...MF=(E,list-addr,NOCHECK) to execute the macro.

,list addr

The name of a storage area to contain the parameters. For MF=S, MF=E, and MF=M, this can be an RS-type address or an address in register (1)-(12).

,attr

An optional 1- to 60-character input string that you use to force boundary alignment of the parameter list. Use a value of X'0F' to force the parameter list to a word boundary or X'0D' to force the parameter list to a doubleword boundary. If you do not code *attr*, the system provides a value of X'0D'.

,COMPLETE

Specifies that the system should check for required parameters and supply defaults for omitted optional parameters.

,NOCHECK

Specifies that the system is not to check for required parameters and is not to supply defaults for omitted optional parameters.

,OPERATION=BEGIN

,OPERATION=CONTINUE

,OPERATION=RELEASE

,OPERATION=ENDALL

An optional parameter that describes the processing of the current subcommand. The default is OPERATION=BEGIN.

,OPERATION=BEGIN

Specify BEGIN to start a new subcommand.

,OPERATION=CONTINUE

Specify CONTINUE to continue the current subcommand.

,OPERATION=RELEASE

Specify when you want the token and all its associated resources to be released.

,OPERATION=ENDALL

Specify when you want to end all operations by releasing all tokens and all resources.

,OUTBUFADDR=outbufaddr

When OPERATION=BEGIN is specified, OUTBUFADDR=*outbufaddr* is a required input parameter that contains the address of your output buffer, which is used for both data and messages. It must be at least 4096 bytes in length. The first four bytes of the buffer must contain the length of the buffer, including the four bytes of the length.

To code: Specify the RS-type address, or address in register (2)-(12), of a pointer field.

,OUTBUFADDR=*outbufaddr*

When OPERATION=CONTINUE is specified, OUTBUFADDR=*outbufaddr* is a required input parameter that contains the address of your output buffer, which is used for both data and messages. It must be at least 4096 bytes in length. The first four bytes of the buffer must contain the length of the buffer, including the four bytes of the length.

To code: Specify the RS-type address, or address in register (2)-(12), of a pointer field.

,OUTPUT=FIELDS

,OUTPUT=LINES

When OPERATION=BEGIN is specified, OUTPUT is an optional parameter that specifies the format of the returned data. The default is OUTPUT=FIELDS.

,OUTPUT=FIELDS

Specify when you want data returned in field format.

,OUTPUT=LINES

Specify when you want data returned in line format. Search output is always returned in standard form when OUTPUT=LINES is specified.

,PLISTVER=IMPLIED_VERSION

,PLISTVER=MAX

,PLISTVER=0

An optional input parameter that specifies the version of the macro. PLISTVER determines which parameter list the system generates. PLISTVER is an optional input parameter on all forms of the macro, including the list form. Specify PLISTVER on all macro forms used for a request and with the same value on all of the macro forms. The PLISTVER values are:

- **IMPLIED_VERSION** which is the lowest version that allows all parameters specified on the request to be processed. If you omit the PLISTVER parameter, IMPLIED_VERSION is the default.
- **MAX** which allows you to change to the largest size currently possible. This size might grow from release to release and affect the amount of storage that your application program needs.

Recommendation: If you can tolerate the size change, always specify PLISTVER=MAX on the list form of the macro. Specifying MAX ensures that the list-form parameter list is large enough to hold all the parameters you might specify on the execute form, when both are assembled with the same level of the system. In this way, MAX ensures that the parameter list does not overwrite nearby storage.

- **0**, if you use the currently available parameters.

To code: Specify one of the following:

- IMPLIED_VERSION
- MAX
- A decimal value of 0

,RETCODE=*retcode*

An optional output parameter into which the return code is to be copied from GPR 15.

To code: Specify the RS-type address of a fullword field, or register (2)-(12).

,RSNCODE=*rsncode*

An optional output parameter into which the reason code is to be copied from GPR 0.

To code: Specify the RS-type address of a fullword field, or register (2)-(12).

,SUBCMDADDR=*subcmdaddr*

When OPERATION=BEGIN is specified, SUBCMDADDR=*subcmdaddr* is a required input parameter that contains the address of the input subcommand. The subcommand consists of a halfword field followed by the subcommand text. The halfword field must contain the length of the subcommand, including both the halfword field and the subcommand text. The maximum value is 32 761.

To code: Specify the RS-type address, or address in register (2)-(12), of a pointer field.

,TOKEN=*token*

When OPERATION=BEGIN is specified, TOKEN=*token* is a required input parameter of a 4-byte area. The DFSMSrmm API creates a token and obtains resources for it, or the DFSMSrmm API reuses the token and the resources.

TOKEN is required even when MF=(E,label,NOCHECK) is specified, unless OPERATION=ENDALL is also specified.

To code: Specify the RS-type address, or address in register (2)-(12), of a 4-character field.

,TOKEN=*token*

When OPERATION=CONTINUE is specified, TOKEN=*token* is a required input parameter of a 4-byte area containing the token used to begin the subcommand. The DFSMSrmm API uses the resources for the token to continue the subcommand.

TOKEN is required even when MF=(E,label,NOCHECK) is specified, unless OPERATION=ENDALL is also specified.

To code: Specify the RS-type address, or address in register (2)-(12), of a 4-character field.

,TOKEN=*token*

When OPERATION=RELEASE is specified, TOKEN=*token* is a required input parameter of a 4-byte area containing a token. The DFSMSrmm API releases the resources for the token, releases the token, and clears the 4-byte area.

TOKEN is required even when MF=(E,label,NOCHECK) is specified, unless OPERATION=ENDALL is also specified.

To code: Specify the RS-type address, or address in register (2)-(12), of a 4-character field.

EDGXCI Return and Reason Codes

When the EDGXCI macro returns control to your application program:

- GPR 15 (and *retcode*, when you code RETCODE) contains a return code.
- GPR 0 (and *rsncode*, when you code RSNCODE) contains a reason code.

The EDGXCI macro returns the following types of return codes and reason codes:

- Return and reason codes that are associated with the processing of your subcommand. These return and reason codes are the same ones that DFSMSrmm returns when you issue a subcommand request. Refer to *z/OS DFSMSrmm Guide and Reference* for more information about these return and reason codes.

- Return codes and reason codes that are issued by the API. The API returns:
 - Return code 0 and reason code 0 when processing has completed successfully.
 - Return code 0 and reason code 4 when the output buffer is full and more information is available.
 - Any return code higher than 100 when an error has occurred.

Table 4 identifies the decimal return and reason codes.

Table 4. Return and Reason Codes for the EDGXCI Macro

Return Code	Reason Code	Meaning and Action
0	—	Meaning: Success. Action: Refer to the action provided with the specific reason code.
0	0	Meaning: EDGXCI command is successfully completed. Action: None required.
0	4	Meaning: There is more output waiting to be given to you. Action: After you have processed the output in your output buffer, use OPERATION=CONTINUE to get more output.
104	—	Meaning: Program error. An exception condition has been encountered, but the operation you requested was completed. The output results might not be acceptable to you. Action: Refer to the action provided with the specific reason code.
104	02	Meaning: There is nothing to CONTINUE. Action: None required.
108	—	Meaning: Program error. An error condition has been encountered, and the operation you requested was not successfully completed. Action: Refer to the action provided with the specific reason code.
108	02	Meaning: Required token is missing. Action: You need to use TOKEN= token
108	04	Meaning: Required address of the input subcommand is missing. Action: You need to use SUBCMDADDR= subcmdaddr
108	06	Meaning: Required address of your output buffer is missing. Action: Use OUTBUFADDR= outbufaddr to specify the parameter.
108	08	Meaning: Your output buffer is less than 4096 bytes in size. Action: Obtain storage and set its length.

Table 4. Return and Reason Codes for the EDGXCI Macro (continued)

Return Code	Reason Code	Meaning and Action
108	10	Meaning: Your output buffer is too small. The second word in your buffer contains the size you need. Action: Obtain the correct amount of storage and set its length.
108	12	Meaning: OPERATION parameter is invalid. Action: Use OPERATION= to specify the parameter; check your program for incorrect modifying of the parameter list.
108	14	Meaning: OUTPUT parameter is invalid. Action: Use OUTPUT= to specify the parameter; check your program for incorrect modifying of the parameter list.
108	16	Meaning: EXPAND parameter is invalid. Action: Use EXPAND= to specify the parameter; check your program for incorrect modifying of the parameter list.
108	56	Meaning: The token is already in use. Action: Use TOKEN= token to specify a token that is not in use.
108	58	Meaning: OUTPUT=FIELDS is not supported for the subcommand specified by SUBCMDADDR= subcmdaddr . Action: Use OUTPUT=LINES or specify a different subcommand.
108	60	Meaning: The length of the subcommand specified by SUBCMDADDR= subcmdaddr is too large. Action: Use a smaller subcommand.
112	—	Meaning: Environmental error. A limit, such as a storage limit, was exceeded. The operation you requested was not successfully completed. Action: Refer to the action provided with the specific reason code.
112	02	Meaning: Unable to obtain sufficient work area storage. Action: Remove the cause of the short-on-storage condition or request a larger region size. Rerun your program.
116	—	Meaning: System error. An error caused by the system, rather than your program, has been encountered. The operation you requested was not successfully completed. Action: Refer to the action provided with the specific reason code.
116	02	Meaning: DFSMSRmm is not installed. Action: Ensure DFSMSRmm is installed and active before running your program.

Table 4. Return and Reason Codes for the EDGXCI Macro (continued)

Return Code	Reason Code	Meaning and Action
116	04	<p>Meaning: A call to a system service has resulted in a non-zero return code. DFSMSrmm has placed the return code and the associated reason code as structured fields in your output buffer.</p> <p>Action: Retry the subcommand after the cause of the error has been corrected or removed.</p>
116	06	<p>Meaning: An abnormal end has occurred.</p> <p>Action: Remove the cause of the abnormal end. Rerun your program.</p>

EDGXCI Example

You can modify the example shown in Figure 2 to:

- Obtain space for your output buffer in your work area in dynamic storage.
- Obtain space for the parameter list in your work area in dynamic storage.
- Specify subcommands that have the following format:
 - The subcommand is prefixed by a two-byte length.
 - The subcommand is specified as a single input string.
- Use addresses that are pointer fields.
- Reuse the same parameter list for many requests.
- Reuse your 4-byte token area by specifying TOKEN= on all EXECUTE forms of EDGXCI. Your 4-byte token area is updated on return from the DFSMSrmm API.
- Make the list form parameter list large enough for all the parameters you might specify by using PLISTVER=MAX on the execute form of the EDGXCI macro.

Macro continuation characters must be entered in column 72.

```

YOURPGM CSECT
R0      EQU  0
R1      EQU  1
R3      EQU  3
R4      EQU  4
R9      EQU  9
R11     EQU 11
R12     EQU 12
R13     EQU 13
R15     EQU 15
*       ..
        USING *,R11
        USING WORKDS,R12
        LA   R13,REGSAVE      Point to register save area
*       ..
*       ..
        LA   R0,OUTBUFVK      Save the
        ST   R0,APIOUTB@      address of output buffer
    
```

Figure 2. Communicating with the DFSMSrmm API (Part 1 of 3)

```

*****
*      Load the API module      **
*****
      LOAD EP=EDGXAPI
      ST   R0,APIMOD@           Save API module address
*
      ..
      XC   MYTOKEN,MYTOKEN      Ensure no token yet
      LA   R4,LISTV@           List volume subcmd address
      BAL  R9,BEGINCMD          Begin the command
*
      ..
*****
*      Going to reuse the resources, instead of releasing**
*      resources obtained by the API for the 1st BEGIN **
*****
      LA   R4,SEARCHD@         Search subcmd address
      BAL  R9,BEGINCMD          Begin the command
*
      ..
      BAL  R9,MOREDATA          Get more data for search
*
      ..
      BAL  R9,RELEASE           All done, release resources
*
      ..
*****
*      Delete the API module    **
*****
      DELETE EP=EDGXAPI
*
      ..
*****
**      Call API to begin a new subcommand      **
*****
BEGINCMD DS    0H
CALL1    EDGXCI MF=(E,MYPL),PLISTVER=MAX,          X
          APIADDR=APIMOD@,OPERATION=BEGIN,        X
          TOKEN=MYTOKEN,                          X
#        SUBCMDADDR=(R4),OUTBUFADDR=APIOUTB@
          BR    R9           Return
*****
**      Call API to get more data for current subcommand **
*****
MOREDATA DS    0H
CALL2    EDGXCI MF=(E,MYPL,NOCHECK),PLISTVER=MAX,  X
          OPERATION=CONTINUE,TOKEN=MYTOKEN
          BR    R9           Return

```

Figure 2. Communicating with the DFSMSrmm API (Part 2 of 3)

```

*****
**      Call API to release resource such as storage and **
**      loaded modules.                                **
*****
RELEASE DS  0H
REL1    EDGXCI MF=(E,MYPL,NOCHECK),PLISTVER=MAX,      X
        OPERATION=RELEASE,TOKEN=MYTOKEN
        BR    R9          Return
*****
**      SEARCH DATA SET SUBCOMMAND                    **
*****
SEARCHD DS  0C
        DC    AL2(SEARCHDL)
        DC    C'SEARCHDATASET ....'
SEARCHDL EQU *-SEARCHD
SEARCHD@ DC  A(SEARCHD)
*****
**      LISTVOLUME SUBCOMMAND                          **
*****
LISTV   DS  0C          Listv command buffer
        DC    AL2(LISTVL)      Length of command
        DC    C'LISTVOLUME ....'
LISTVL  EQU *-LISTV      Length of command
LISTV@  DC  A(LISTV)      Address of command
*       ..
*****
**      PROGRAM WORK AREA                              **
*****
WORKDS  DSECT
APIOUTB@ DS  A          Pointer to output buffer
APIMOD@  DS  A          Address of the API module
REGSAVE  DS  18F        Save area
MYTOKEN  DS  CL4        Token from the API
*****
**      PARAMETER LIST DEFINITION                      **
*****
EDGXCI MF=(L,MYPL,0D),PLISTVER=MAX PLIST area
DS  0D
OUTBUFWK DS  CL4096      Output buffer area
*****
**      STRUCTURED FIELD DEFINITIONS                  **
*****
SFDEFDS DSECT
        EDGXSf
        END

```

Figure 2. Communicating with the DFSMSrmm API (Part 3 of 3)

Chapter 2. Programming Guidelines

Use the following general programming guidelines to help you write your application program.

Obtaining Resources

When you begin a new subcommand request and provide a token set to all zeros, the DFSMSrmm API obtains a new set of resources. When you begin a new subcommand request and reuse a valid, nonzero token, DFSMSrmm reuses resources associated with the token.

- Consider using a different output buffer for each RMM TSO subcommand request. Reuse an output buffer to begin a new subcommand request only when there is nothing in the buffer that you need.
 - Allocate a sufficient number of token areas, and parameters lists.
 - Use the correct token when continuing a RMM TSO subcommand or when releasing a particular set of resources.
 - Reuse a token to begin a new RMM TSO subcommand only when you no longer need the information obtained from the previous request.
 - Reuse the resources associated with the token, especially when you are processing hundreds or thousands of subcommands.
-

Specifying TSO Subcommand Input in the EDGXCI Macro

To obtain information from the DFSMSrmm control data set, specify a DFSMSrmm TSO subcommand as a single input line without the RMM command, as shown in Figure 3.

```
AV MLV001 STATUS(MASTER) EXPDT(98001) OWNER(IBMUSER) OWNERACCESS(UPDATE) RACK(ML0001)
```

Figure 3. Example of Specifying the DFSMSrmm API Subcommand

Do not specify it as an RMM command with multiple input lines, as shown in Figure 4.

```
RMM AV MLV001 STATUS(MASTER) EXPDT(98001) OWNER(IBMUSER)-  
OWNERACCESS(UPDATE) RACK(ML0001)
```

Figure 4. Example of Specifying the RMM TSO Subcommand

In addition, specify subcommands using fully specified subcommand operands and their values. Avoid abbreviating the subcommands or operands because they can change when new subcommand operands and values are added.

Using the CONTINUE Operation in the EDGXCI Macro

Use the EDGXCI OPERATION=CONTINUE parameter in your application program to ensure that you obtain all the available data. When you use OPERATION=CONTINUE, you might not receive more output data or you might receive only messages in your output buffer.

The DFSMSrmm API can return control back to your application program before returning all the data you expect because:

- There is no more room in the output buffer for the additional data.
- The API stops after returning data for a single resource when you issue a request that uses a SEARCH command and the OUTPUT=FIELDS parameter.
- There is no more data to return to your application program.

The DFSMSrmm API issues return codes and reason codes indicating the results of processing when you specify OPERATION=CONTINUE. Write your application program to check the return codes and reason codes that the DFSMSrmm API returns to your application program.

Table 5. Return Codes and Reason Codes Issued when You Specify OPERATION=CONTINUE

Return Code	Reason Code	Processing
0	0	DFSMSrmm issues this return code and reason code in response to a search type subcommand. DFSMSrmm will not return any more records because there are no more records to return or because the search limit has been reached.
0	4	DFSMSrmm issues this return code and reason code when you issue requests specifying the LISTCONTROL subcommand and there are more records to return. Specify the OPERATION=CONTINUE to obtain more records.
4	2	DFSMSrmm issues this return code and reason code in response to a SEARCH type subcommand. The DFSMSrmm API issues these codes when the search limit you set for a DFSMSrmm subcommand has been reached but there might be more records to return.
4	4	DFSMSrmm issues this return code and reason code in response to a search type subcommand. The DFSMSrmm API issues these codes when the search processing indicates fewer records returned than were requested.
4	8	DFSMSrmm issues this return code and reason code in response to a search type subcommand. The DFSMSrmm API issues these codes when no entry meets then search criteria during search processing.

See “Controlling Output from List and Search Type Requests” on page 49 for an example of the interaction between the size of an output buffer, the amount of output data the API returns, and the LIMIT value you set.

Using Parameter Lists to Pass Information to the DFSMSrmm API

You can write your application program to include the following processing:

- Process subcommands serially or process commands concurrently.
- Use single parameter lists or multiple parameter lists for each subcommand. For example, your application program can use one parameter list for a SEARCH type of subcommand and another parameter list for a CHANGE type of subcommand.
- Reuse resources (tokens).

You can use variations of parameter lists and tokens in your application program to meet your application requirements. For illustrative purposes, the examples in the sections that follow use inline code segments with shortened code lines.

Table 6. Types of Parameter Lists

Variation	Guidelines	Reference
Single parameter list and a single token area	<ul style="list-style-type: none"> • Only one subcommand request can be active at a time. • An active subcommand request must be completed before beginning another subcommand request. 	“Coding a Single Parameter List, Single Token Area”
Single parameter list and multiple token area	<ul style="list-style-type: none"> • More than one subcommand request can be active at a time. • Only one subcommand request can be processed at any given time. 	“Coding a Single Parameter List, Multiple Token Areas” on page 19
Multiple parameter lists with a single token area	<ul style="list-style-type: none"> • Only one subcommand can be active at a time. • Different parameter lists can be used for the following tasks: <ul style="list-style-type: none"> – Begin subcommand requests. – Continue subcommand requests. – Release resources. • Starting a new subcommand request ends any previous subcommand request. 	“Coding Multiple Parameter List, Single Token Area” on page 21.
Multiple parameter lists and multiple token area	<ul style="list-style-type: none"> • More than one subcommand request can be active at a time. • More than one active subcommand request can be processed at a time. • Different parameter lists can be used to: <ul style="list-style-type: none"> – Begin subcommand requests. – Continue subcommand requests. – Release resources. 	“Coding Multiple Parameter List, Multiple Token Areas” on page 22

Coding a Single Parameter List, Single Token Area

Figure 5 on page 18 is an example of how your application program can use a single parameter list and a single token area. The example includes a BEGIN, CONTINUE, and RELEASE for each subcommand request because you are not

reusing resources. You need a new token for the second subcommand request because you are not reusing any resources and need a separate token for each request.

```

*****
** Start the first subcommand
*****
XC  TOKENA,TOKENA          No resources/token yet
LA  R4,SUBCMD1             Point to 1st subcommand
EDGXCI MF=(E,PLIST),PLISTVER=MAX,          X
      APIADDR=APIMOD@,OPERATION=BEGIN,    X
      TOKEN=TOKENA,                       X
      SUBCMDADDR=(R4),OUTBUFADDR=(R3)
...*****
** Continue the subcommand
*****
EDGXCI MF=(E,PLIST),PLISTVER=MAX,          X
      APIADDR=APIMOD@,OPERATION=CONTINUE, X
      TOKEN=TOKENA,                       X
      OUTBUFADDR=(R3)
...
*****
** Done with the subcommand, release
*****
EDGXCI MF=(E,PLIST),PLISTVER=MAX,          X
      APIADDR=APIMOD@,OPERATION=RELEASE,  X
      TOKEN=TOKENA
...
*****
** Start the second subcommand
*****
LA  R4,SUBCMD2             Point to 2nd subcommand
EDGXCI MF=(E,PLIST),PLISTVER=MAX,          X
      APIADDR=APIMOD@,OPERATION=BEGIN,    X
      TOKEN=TOKENA,                       X
      SUBCMDADDR=(R4),OUTBUFADDR=(R3)
...
*****
** Continue the subcommand
*****
EDGXCI MF=(E,PLIST),PLISTVER=MAX,          X
      APIADDR=APIMOD@,OPERATION=CONTINUE, X
      TOKEN=TOKENA,                       X
      OUTBUFADDR=(R3)
...
*****
** Done with the subcommand, release
*****
EDGXCI MF=(E,PLIST),PLISTVER=MAX,          X
      APIADDR=APIMOD@,OPERATION=RELEASE,  X
      TOKEN=TOKENA

```

Figure 5. Single Parameter List, Single Token Area

The example includes the OPERATION=RELEASE parameter. When you use OPERATION=RELEASE, DFSMSrmm releases work areas that contain data and pointers for the subcommand. You must obtain resources for the next subcommand request. You might improve performance by deleting the OPERATION=RELEASE for the first subcommand. Then when you begin the second subcommand, the DFSMSrmm API module reuses resources, such as work areas, that it obtained for the first subcommand. Reusing resources can reduce processing overhead associated with releasing and obtaining resources.

If you do not use OPERATION=RELEASE, when the second subcommand request starts, all data and pointers for the first subcommand are overwritten.

For OPERATION=RELEASE, you do not specify SUBCMDADDR or OUTBUFADDR. For OPERATION=CONTINUE, you do not specify SUBCMDADDR.

Coding a Single Parameter List, Multiple Token Areas

This variation allows you to continue a previous subcommand after you have started another. You might need to use multiple token areas when your application program is designed to support a sequence of subcommand requests like the one that follows:

1. Use a SEARCHVOLUME subcommand to request volume information. For example:
SEARCHVOLUME OWNER(userid) LIMIT(*)
2. Use a SEARCHDATASET subcommand to obtain data set information. For example:
SEARCHDATASET VOLUME(volser) LIMIT(*)
3. Repeat subcommands until all information for all data sets is obtained and passed back to your user.

Figure 6 shows how you can use a single parameter list and multiple tokens to identify work areas. The multiple token areas allow the flexibility of continuing a previous subcommand after starting another subcommand. Use the token you obtained from the previous subcommand when you want to continue that subcommand.

```
*****
** Start the first subcommand
*****
XC  TOKEN1,TOKEN1          No resources/token yet
LA  R4,SUBCMD1             Point to 1st subcommand
EDGXCI MF=(E,PLIST),PLISTVER=MAX,          X
      APIADDR=APIMOD@,OPERATION=BEGIN,    X
      TOKEN=TOKEN1,                      X
      SUBCMDADDR=(R4),OUTBUFADDR=(R3)
...
*****
** Start the second subcommand
*****
XC  TOKEN2,TOKEN2          No resources/token yet
LA  R4,SUBCMD2             Point to 2nd subcommand
EDGXCI MF=(E,PLIST),PLISTVER=MAX,          X
      APIADDR=APIMOD@,OPERATION=BEGIN,    X
      TOKEN=TOKEN2,                      X
      SUBCMDADDR=(R4),OUTBUFADDR=(R3)
...

```

Figure 6. Single Parameter List, Multiple Token Areas (Part 1 of 2)

```

*****
** Continue the second subcommand
*****
    EDGXCI MF=(E,PLIST),PLISTVER=MAX,           X
           APIADDR=APIMOD@,OPERATION=CONTINUE, X
           TOKEN=TOKEN2,                       X
           OUTBUFADDR=(R3)

    ...
*****
** Continue the first subcommand
*****
    EDGXCI MF=(E,PLIST),PLISTVER=MAX,           X
           APIADDR=APIMOD@,OPERATION=CONTINUE, X
           TOKEN=TOKEN1,                       X
           OUTBUFADDR=(R3)

    ...
*****
** Release resources for the first subcommand
*****
    EDGXCI MF=(E,PLIST),PLISTVER=MAX,           X
           APIADDR=APIMOD@,OPERATION=RELEASE,  X
           TOKEN=TOKEN1

    ...
*****
** Release resources for the second subcommand
*****
    EDGXCI MF=(E,PLIST),PLISTVER=MAX,           X
           APIADDR=APIMOD@,OPERATION=RELEASE,  X
           TOKEN=TOKEN2

```

Figure 6. Single Parameter List, Multiple Token Areas (Part 2 of 2)

Figure 6 on page 19 shows how you can reuse resources. When your application program is finished with the first subcommand request, it can reuse the first token to begin a third request. When that token is reused to begin a new subcommand request, you cannot continue the previous request associated with that token.

In Figure 6 on page 19, the same output buffers are used for all subcommand requests. As a result, all of the output data in the output buffer must be processed before another request can be started or continued. To avoid this situation, you might write your application program to use multiple output buffers instead of a single output buffer.

Figure 6 on page 19 shows multiple releases using the OPERATION=RELEASE parameter. Instead of using multiple releases, you can specify the OPERATION=ENDALL once to free all resources associated with all tokens. See Figure 7 for an example of this method.

Note: You do not specify the TOKEN parameter when you use OPERATION=ENDALL. Your application program, however, is responsible for setting all tokens to zeros to prevent them from being reused.

```

*****
** Release all resources
*****
    EDGXCI MF=(E,PLIST),PLISTVER=MAX,           X
           APIADDR=APIMOD@,OPERATION=ENDALL

```

Figure 7. Releasing All Resources

Your application program might encounter a resource constraint condition like short-on-storage before it issues the OPERATION=ENDALL.

Coding Multiple Parameter List, Single Token Area

Figure 8 shows how you can use multiple parameter lists and a single token area. With a single token area, you cannot continue the first subcommand request, even though there are multiple parameter lists. The variation in Figure 8 prevents you from continuing the first subcommand after you begin the second subcommand.

```
*****
** Start the first subcommand
*****
XC   TOKENA,TOKENA           No resources/token yet
LA   R4,SUBCMD1             Point to 1st subcommand
EDGXCI MF=(E,BEGINPL),PLISTVER=MAX,           X
      APIADDR=APIMOD@,OPERATION=BEGIN,       X
      TOKEN=TOKENA,                           X
      SUBCMDADDR=(R4),OUTBUFADDR=(R3)
...
*****
** Continue the subcommand
*****
EDGXCI MF=(E,CONTPL),PLISTVER=MAX,           X
      APIADDR=APIMOD@,OPERATION=CONTINUE,    X
      TOKEN=TOKENA,                           X
      OUTBUFADDR=(R3)
...
*****
** Done with the subcommand, release
*****
EDGXCI MF=(E,RELPL),PLISTVER=MAX,           X
      APIADDR=APIMOD@,OPERATION=RELEASE,     X
      TOKEN=TOKENA
...
*****
** Start the second subcommand
*****
LA   R4,SUBCMD2             Point to 2nd subcommand
EDGXCI MF=(E,BEGINPL),PLISTVER=MAX,           X
      APIADDR=APIMOD@,OPERATION=BEGIN,       X
      TOKEN=TOKENA,                           X
      SUBCMDADDR=(R4),OUTBUFADDR=(R3)
*****
** Continue the subcommand
*****
EDGXCI MF=(E,CONTPL),PLISTVER=MAX,           X
      APIADDR=APIMOD@,OPERATION=CONTINUE,    X
      TOKEN=TOKENA,                           X
      OUTBUFADDR=(R3)
...
*****
** Done with the subcommand, release
*****
EDGXCI MF=(E,RELPL),PLISTVER=MAX,           X
      APIADDR=APIMOD@,OPERATION=RELEASE,     X
      TOKEN=TOKENA
```

Figure 8. Multiple Parameter Lists, Single Token Area

Coding Multiple Parameter List, Multiple Token Areas

This variation lends itself to processing in re-entrant code where subroutines can be created for commonly used code. Figure 9 shows how the same subroutines can be used to issue and process multiple subcommand requests with each having its own token and output buffer area.

```
*****
** Start the first subcommand
*****
XC   TOKENA,TOKENA           No resources/token yet
LA   R2,TOKENA               Point to 1st token
LA   R3,OUTBUF1              Point to 1st buffer
LA   R4,SUBCMD1              Point to 1st subcommand
BAS  R9,BEGRTN                Issue command
...
*****
** Start the second subcommand
*****
LA   R2,TOKENB               Point to 2nd token
LA   R3,OUTBUF2              Point to 2nd buffer
LA   R4,SUBCMD2              Point to 2nd subcommand
BAS  R9,BEGRTN                Issue command
...
*****
** Continue the 2nd subcommand
*****
LA   R2,TOKENB               Point to 2nd token
BAS  R9,CONRTN                Continue 2nd cmd
...
*****
** Continue the 1st subcommand
*****
LA   R2,TOKENA               Point to 1st token
BAS  R9,CONRTN                Continue 1st cmd
...

```

Figure 9. Multiple Parameter Lists, Multiple Token Area (Part 1 of 2)

```

*****
** Done with the subcommands, release
*****
      LA  R2,TOKENA           Point to 1st token
      BAS R9,RELTRN          Release 1st token
      ...
      LA  R2,TOKENB           Point to 2nd token
      BAS R9,RELTRN          Release 2nd token
      ...
BEGRTN EQU *
      EDGXCI MF=(E,BEGINPL),PLISTVER=MAX,           X
              APIADDR=APIMOD@,OPERATION=BEGIN,     X
              TOKEN=(R2),                          X
              SUBCMDADDR=(R4),OUTBUFADDR=(R3)
      BR   R9
      ...
CONRTN EQU *
*****
** Continue the subcommand
*****
      EDGXCI MF=(E,CONTPL),PLISTVER=MAX,           X
              APIADDR=APIMOD@,OPERATION=CONTINUE,  X
              TOKEN=(R2),                          X
              OUTBUFADDR=(R3)
      BR   R9
      ...
RELRTN EQU *
*****
** Done with the subcommand, release
*****
      EDGXCI MF=(E,RELPL),PLISTVER=MAX,           X
              APIADDR=APIMOD@,OPERATION=RELEASE,   X
              TOKEN=(R2)
      BR   R9

```

Figure 9. Multiple Parameter Lists, Multiple Token Area (Part 2 of 2)

Specifying the Option to Free a Resource

You can free a resource when you no longer need to use it by performing one of the following actions.

- Use the OPERATION=RELEASE and TOKEN=*token* parameters to free all resources associated with the specified token as shown in Figure 10 on page 24. Specifying TOKEN=TOKENA on the execute form of EDGXCI causes the 4-byte TOKENA area to be set to all zeros upon return from freeing the token. TOKEN=*token* is required even when you specify MF=(E,label,NOCHECK), unless you also specify OPERATION=ENDALL. Specifying TOKEN=*token* causes the 4-byte token area to be updated upon return from the DFSMSrmm API. The token is set to all zeros by the EDGXCI macro expansion.
- You specify the OPERATION=ENDALL parameter to free all resources associated with all tokens, as shown in Figure 11 on page 24.

Rule: You are responsible for setting applicable tokens to all zeros when you specify OPERATION=ENDALL.
- Your application program ends (end-of-task occurs).

```

*****
** Done with the subcommand, setup release parmlist
*****
EDGXCI MF=(M,RELPL,NOCHECK),PLISTVER=MAX,           X
        APIADDR=APIMOD@,OPERATION=RELEASE

*****
** Call the DFSMSrmm API
*****
EDGXCI MF=(E,RELPL,NOCHECK),TOKEN=TOKENA

```

Figure 10. *TOKEN= Specified on EDGXCI*

Specifying the Option to Release a Resource

To release a resource, you must have access to the tokens associated with the resources that you want to release. If you no longer have access to the tokens or you have set the tokens to all zeros before you use OPERATION=RELEASE, there are only two ways you can free the resources:

- Your application program specifies OPERATION=ENDALL to free all resources associated with all tokens.
- Your application program ends (end-of-task occurs).

In Figure 11, the OPERATION=ENDALL parameter is specified and TOKEN is not required.

```

*****
** Done with the subcommand, setup endall parmlist
*****
EDGXCI MF=(M,RELPL,NOCHECK),PLISTVER=MAX,           X
        APIADDR=APIMOD@

*****
** Call the DFSMSrmm API
*****
EDGXCI MF=(E,RELPL,NOCHECK),OPERATION=ENDALL

```

Figure 11. *TOKEN= Not Specified on EDGXCI*

Chapter 3. Receiving Output Data in the Output Buffer

The DFSMSrmm application programming interface returns data in the output buffer you define. The data is in the following format:

- A four-byte length field into which your application program sets the total size of the output buffer.
- A four-byte length field that is used by DFSMSrmm when your output buffer is too small.
- A four-byte length field that contains the total size of all the output including the bytes of the length field.
- Structured fields which consist of structured field introducers (SFI) and data.
 - An SFI is a structure that separates one line or field of output data from another. SFIs are described in “Description of Structured Fields”.
 - Data in line format or field format.

Use the EDGXSF macro described in “EDGXSF: Structured Field Definitions” on page 74 to map the output buffer header and the structured field introducers. EDGXSF also defines values used in the output fields. Do not hardcode the offsets because they might change in the future.

The DFSMSrmm API returns various types of output to your application program:

- Return and reason codes in registers from DFSMSrmm and the DFSMSrmm API.
- Return and reason codes from system services in structured fields.
- List header lines as formatted lines in structured fields.
- Messages as formatted lines or as message variables in structured fields.
- Report output data as formatted lines or as unformatted fields in structured fields.

The DFSMSrmm API does not return output data in the output buffer for every subcommand you issue using the API. See “SFIs for Output Data for Subcommands” on page 35 for information on each subcommand and the possible output data that the API returns as structured fields in your output buffer.

Description of Structured Fields

A structured field consists of:

- A Structured Field Introducer (SFI)
- Data that follows the SFI as described below:

Part	Description
-------------	--------------------

SFI	Structured Field Introducer. A structure with a minimum size of 8 bytes in the following format:
------------	--

Byte count	Description
2	Two-byte length. The length includes the length of the SFI (8 bytes) and the length of the data following the SFI.
3	Three-byte SFI identifier (ID)
1	One-byte SFI type modifier
1	One-byte (reserved)
1	One-byte data-type identifier

Data Data following the SFI which can contain actual data, no data, binary zeros, or blank data.

See Appendix A, “Structured Field Introducers”, on page 53 for descriptions of the SFIs that the DFSMSrmm API returns.

Structured fields can appear in any order. Write your application so it skips over any structured field it is not prepared to handle. This makes your application program less sensitive to changes like enhancements to DFSMSrmm that introduce new or different structured fields and sequences. You can update your application program when it is convenient to do so rather than being forced to do so because your application program no longer works.

In the examples that follow, <SFI>data denotes a Structured Field Introducer (SFI) that is followed by data. In the examples, the term “SFI” is replaced with its descriptive name, for example: <data-set-name>. There is no association between the length of a particular SFI and its descriptive name.

Requesting SFI Data Format

You determine if the DFSMSrmm API returns line format or field format data to your application program. Line format contains fixed text and variable data that are formatted into lines. Line format is suitable for displaying at a terminal or for printing. Field format data consists only of SFIs and variable data.

You can request that the data be returned in line format when you specify the EDGXCI macro OUTPUT=LINES parameter. You can request that the data be returned in field format by specifying the OUTPUT=FIELDS parameter.

When you specify the EDGXCI macro OUTPUT=LINES parameter, the DFSMSrmm API returns the output lines in the same format as information returned by the DFSMSrmm RMM TSO subcommand.

In the examples that follow, assume that there is only one data set on volume A00001: RMMUSER.TSO.COMMAND1.

Requesting Line Format

Figure 12 on page 27 is an example of the line format data that the DFSMSrmm API returns when you specify the OUTPUT=LINES parameter. In the example, the request specifies the RMM TSO subcommand LISTDATASET RMMUSER.TSO.COMMAND1 VOLUME(A00001). The request might produce the output that is shown in Figure 12 on page 27. <line> is the SFI for each line and is followed by the data returned from specifying the RMM LISTDATASET subcommand.


```

<Begin DATASET Group>
  <line>Data set name = RMMUSER.TSO.COMMAND1
  <line>Volume       = A00001           Physical file sequence number = 1
  <line>Owner        = RMMUSER         Data set sequence = 0
  <line>Create date  = 11/15/2001 Create time = 04:32:14 System ID       = EZU34
  <line>Block size   = 80              Block count           = 10
  <line>Percent of volume = 0          Total block count     = 0
  <line>Logical Record Length = 8      Record Format         = FB
  <line>Date last written =           Date last read       = 11/15/2001
  <line>Job name     = RMMUSERJ        Last job name        = RMMUSERJ
  <line>Step name    = READ2           Last step name       = READ2
  <line>Program name =                 Last program name    = IEBCGENER
  <line>DD name      = SYSUT1         Last DD name         = SYSUT1
  <line>Device number = 0590          Last Device number   = 0590
  <line>Management class =           VRS management value =
  <line>Storage group =               VRS retention date   =
  <line>Storage class =               VRS retained        = NO
  <line>Data class   =                 ABEND while open    = NO
  <line>              Catalog status   = UNKNOWN
  <line>Primary VRS details:
  <line>  Name           =
  <line>  Job name        =              Type                   =
  <line>  Subchain NAME    =              Subchain start date  =
  <line>Secondary VRS details:
  <line>  Value or class =
  <line>  Job name        =
  <line>  Subchain NAME    =              Subchain start date  =
  <line> Security Class =              Description           =
<End DATASET group>

```

Figure 12. Example of List Type of Output Using OUTPUT=LINES

Requesting Field Format

Figure 13 is an example of the field format data that the DFSMSrmm API returns when you specify the OUTPUT=FIELDS parameter. Your request specifying LISTDATASET FIELD.TEST VOLUME(VOL001) subcommand might also produce the output shown in Figure 13.

```

<Begin DATASET group>
  <DSN - data set name       : 44 , character:      >
  <CJBN - job name           : 8 , character:      >
  <VOL - volume serial       : 6 , character:      >
  <OWN - owner               : 8 , character:      >
  <DSEQ - data set sequence  : 4 , bin(31):       >
  <DEV - device number (address) : 4 , hexadecimal: >
  <FILE - physical file sequence : 4 , bin(31):       >
  <CDTJ - create date        : 4 , packed decimal: >
  <CTM - create time         : 4 , packed decimal: >
  <SYS - SMF system id       : 8 , character:      >
  <BLKS - block size         : 4 , bin(31):       >
  <BLKC - block count        : 4 , bin(31):       >
  <LRCL - logical record length : 4 , bin(31):       >
  <RCFM - record format      : 4 , character:      >
  <DC - data class           : 8 , character:      >
  <DLWJ - date last written   : 4 , packed decimal: >
  <DLRJ - date last read     : 4 , packed decimal: >

```

Figure 13. Example of Output Using OUTPUT=FIELDS (Part 1 of 2)

```

<STEP - step name           : 8 , character:      >
<DD  - dd name             : 8 , character:      >
<MC  - management class   : 8 , character:      >
<SG  - storage group name  : 8 , character:      >
<SC  - storage class       : 8 , character:      >
<VMV - VRS management value : 8 , character:      >
<RTDJ - retention date     : 4 , packed decimal: >
<VTYP - Primary VRS type   : 1 , bin(8):        >
<VJBN - Primary VRS jobn   : 8 , character:      >
<VNME - Primary VRS name   : 44 , character:     >
<VSCN - Primary VRS subchain name: 8 , character: >
<VSCD - Primary VRS subchain date: 4 , packed decimal: >
<VRSR - VRS retained      : 1 , bin(8):        >
<NME  - security class name : 8 , character:      >
<CLS  - sec class description : 32 , character:   >
<ABND - Abend while open    : 1 , bin(8):        >
<CTLG - Catalog status     : 1 , bin(8):        >
<2JBN - Secondary VRS jobnme mask: 8 , character: >
<2NME - Secondary VRS mask  : 8 , character:      >
<2SCN - Second. VRS subchain name: 8 , character: >
<2SCD - Second. VRS subchain date: 4 , packed decimal: >
<BLKT - Total block count   : 4 , bin(31):       >
<CPGM - Creating program name : 8 , character:      >
<LPGM - Last used program name : 8 , character:      >
<LJOB - Last used job       : 8 , character:      >
<LSTP - Last used step name  : 8 , character:      >
<LDD  - Last used DD name   : 8 , character:      >
<LDEV - Last drive         : 4 , character:      >
<DPCT - Percent of volume   : 1 , bin(8):        >
<End DATASET group>

```

Figure 13. Example of Output Using OUTPUT=FIELDS (Part 2 of 2)

Figure 13 on page 27:

- Shows begin and end group SFIs. In this example, <Begin DATASET Group> and <End DATASET Group>.
- Includes descriptive names used to identify SFIs. The SFI identifies the data type; and the long character <...> strings do not represent the actual size of the SFIs, which are only 8 bytes in length.
- Can appear to have no data. This is because structured fields can
 - Have no data (SFI only, as in this example), binary zeros, or blank characters.
 - Be omitted if they have no data.
- Shows that structured fields can be order independent. For example, VOL in Figure 28 on page 41 occurs before OWN for LISTDATASET while OWN occurs before VOL for LISTPRODUCT in Figure 30 on page 42.
- Shows that structured fields might not be in the same order as their corresponding positions in any line-format output.
- Shows variable-length fields.

Refer to Appendix D, “Hexadecimal Example of an Output Buffer”, on page 79 for an example of an output buffer in hexadecimal representation.

Requesting Types of Output

The DFSMSrmm API can produce standard output and expanded output depending on the values you specify for the OUTPUT and EXPAND parameters as described in “EDGXCI Parameters” on page 6.

The examples shown in “Requesting Standard Output” and “Requesting Expanded Output”:

- Assume that there is only one data set on volume VOL001:
OWNERONE.FIELD.TEST.
- Use SFI data type descriptions, such as DSN for data set name.
- Show maximum length values, without the term “bytes”.
- Show the data type, such as character.

Requesting Standard Output

When you specify EXPAND=NO, your request specifying the SEARCHDATASET VOLUME(VOL001) subcommand might produce the output that is shown in Figure 14.

```
<Begin DATASET group>
  <DSN - data set name   : 44 , character:   >OWNERONE.FIELD.TEST
  <VOL - volume serial  : 6  , character:   >VOL001
  <OWN - owner          : 8  , character:   >OWNERONE
  <CDTJ - create date   : 4  , packed decimal: >x'1997117C'
  <CTM - create time    : 4  , packed decimal: >x'0815270C'
  <FILE - phys file seq : 4  , bin(31):      >x'00000001'
<End DATASET group>
```

Figure 14. Example of Search Type of Output Using EXPAND=NO

Refer to Appendix D, “Hexadecimal Example of an Output Buffer”, on page 79 for a hexadecimal representation and discussion of the contents of the output buffer shown in Figure 14.

Requesting Expanded Output

The DFSMSrmm API can provide expanded output for the DFSMSrmm TSO RMM SEARCHDATASET, SEARCHPRODUCT, SEARCHVOLUME, and SEARCHVRS subcommands when you specify OUTPUT=FIELDS and EXPAND=YES or use the default EXPAND=YES in your application program.

The DFSMSrmm API does not provide expanded data for the DFSMSrmm TSO RMM SEARCHBIN or SEARCHRACK subcommands.

When you specify OUTPUT=FIELDS and EXPAND=YES, your SEARCHDATASET VOLUME(VOL001) subcommand might produce the output that is shown in Figure 15 on page 30.

```

<Begin DATASET Group>
<DSN - data set name      : 44 , character:      >OWNERONE.FIELD.TEST
<CJBN - job name          : 8 , character:      >TESTAPI
<VOL - volume serial     : 6 , character:      >VOL001
<OWN - owner              : 8 , character:      >OWNERONE
<DSEQ - data set sequence : 4 , bin(31):    >'x'00000001'
<DEV - device number     : 4 , bin(31):    >0BEO
<FILE - physical file seq : 4 , bin(31):    >'x'00000001'
<CDTJ - create date      : 4 , packed decimal: >'x'1997117C'
<CTM - create time       : 4 , packed decimal: >'x'0741290C'
<SYS - SMF system id     : 8 , character:      >9021
<BLKS - block size       : 4 , bin(31):    >'x'00000050'
<BLKC - block count      : 4 , bin(31):    >'x'00000005'
<LRCL - logical rcd length : 4 , bin(31):    >'x'00000050'
<RCFM - record format    : 4 , character:      >FB
<DC - data class         : 8 , character:      >DCCLS1
<DLWJ - date last written : 4 , packed decimal: >
<DLRJ - date last read   : 4 , packed decimal: >1997117F
<STEP - step name        : 8 , character:      >STEP01
<DD - dd name            : 8 , character:      >OUTPUT
<MC - management class   : 8 , character:      >
<SG - storage group      : 8 , character:      >STG0S
<SC - storage class      : 8 , character:      >SCFAST
<VMV - VRS value         : 8 , character:      >
<RTDJ - VRS retention date : 4 , packed decimal: >
<VTYP - Primary VRS type  : 1 , bin(8):      >1
<VJBN - Primary VRS jobn  : 8 , character:      >TEST*
<VNME - Primary VRS name  : 44 , character:     >TESTA.**
<VSCN - Primary VRS s-chain n.: 8 , character:  >VRS1
<VSCD - Primary VRS s-chain d.: 4 , packed decimal: >1997/230
<VRSR - VRS retained      : 1 , bin(8):      >1
<NME - security class     : 8 , character:      >
<CLS - secl description   : 32 , character:     >
<ABND - Abend while open  : 1 , bin(8):      >0
<CTLG - Catalog status    : 1 , bin(8):      >0
<2JBN - Seco. VRS jobname mask: 8 , character:  >
<2NME - Secondary VRS mask : 8 , character:     >MV*
<2SCN - Second. VRS s-chain n.: 8 , character:  >M2
<2SCD - Second. VRS s-chain d.: 4 , packed decimal: >1997/241
<BLKT - Total block count : 4 , bin(31):    >
<End DATASET Group >

```

Figure 15. Example of Search Type of Output Using OUTPUT=FIELDS, EXPAND=YES

Accessing Return and Reason Codes

DFSMSrmm returns return codes and reason codes to your application program in the general purpose registers and also as data in your output buffer as follows:

- Return codes and reason codes issued as a result of processing of your subcommand request. Refer to *z/OS DFSMSrmm Guide and Reference* for information about these codes.
- Return codes and reason codes associated with the API itself. These are the return codes and reason codes listed in “EDGXCI Return and Reason Codes” on page 9 for macro EDGXCI.
- Return and reason codes from system services. DFSMSrmm uses various system services, such as catalog services, to process the subcommands from your application program. When DFSMSrmm receives a non-zero return code from a system service, the DFSMSrmm API places the return code and

associated reason code in your output buffer as structured fields, along with a name to identify the service. See “System Return and Reason Code SFIs” on page 33 for more information.

Accessing Messages and Message Variables

The DFSMSrmm API can return messages and message variables in your output buffer. Figure 16 show how messages are returned in line format when you specify the OUTPUT=LINES parameter and field format when you specify the OUTPUT=FIELDS parameter.

```
<message line>message text
<message line>message text

or

<Begin MESSAGE group>
  <message number >number
  <message variable>variable
<End MESSAGE group>
<Begin MESSAGE group>
  <message number >number
  <message variable>variable
<End MESSAGE group>
```

Figure 16. Message and Message Variable Structured Fields. Message and Message Variable Structured Fields

Refer to “Messages and Message Variables SFIs” on page 34 for information about which messages can be placed in your output buffer.

Interpreting Date Format and Time Format

DFSMSrmm dates are in packed decimal format: yyyydddC, where yyyyddd is a Julian date and C is a standard packed-decimal sign character. The date formats used are returned in internal format and can be interpreted as follows:

- Interpret 9999366 as PERMANENT retention date format.
- Interpret 9999365 as PERMANENT retention date format.
- Interpret 9800000 as WHILECATLG retention date format.
- Interpret 98cccc as CYCL/ccccc retention date format.
- Interpret 0000098 as CATRETPD retention date format.
- Interpret yyyyddd as yyyy/mm/dd, yyyy/dd/mm, mm/dd/yyyy, dd/mm/yyyy, dd/yyyy/mm, mm/yyyy/dd.

DFSMSrmm also returns time in packed decimal format: hhmsstC, where hhmsst is the time in hours, minutes, seconds, and tenths of seconds and C is a standard packed-decimal sign character.

Identifying Structured Field Introducers

A structured field introducer (SFI) is a structure that identifies one line or field of output data from another. The DFSMSrmm API returns these types of SFIs in your output buffer:

- SFIs that begin and end a resource group as described in “Begin and End Resource Groups”.
- SFIs that introduce a single line of output data as described in:
 - “System Return and Reason Code SFIs” on page 33
 - “Messages and Message Variables SFIs” on page 34
 - “ADD-Type of Subcommands” on page 35
 - “CHANGE-Type of Subcommands” on page 36
 - “DELETE-Type of Subcommands” on page 36
 - “GETVOLUME Subcommand” on page 36
 - “LIST-Type of Subcommands” on page 37
 - “SEARCH-Type of Subcommands” on page 45

The following notation indicates an SFI:

```
<xxxx - descriptive name      : data length, data type : >
```

where “xxxx” is a character type of mnemonic. In your application program, you need to use the 3-byte or 4-byte hexadecimal identifiers for Structured Field Introducers.

Appendix A, “Structured Field Introducers”, on page 53 describes all the structured fields that the DFSMSrmm API can return to your application program.

Appendix B, “Structured Field Introducers by Subcommand”, on page 71 shows all of the Structured Field Introducers by subcommand.

The DFSMSrmm API does not return information for all subcommands. For example, the DFSMSrmm API does not produce structured fields for a successful ADDBIN subcommand request.

Begin and End Resource Groups

In the previous examples, you saw that output structured fields were grouped by a pair of unique Structured Field Introducers as shown in Figure 17.

```
<Begin DATASET group>  
  <..          >data set name  
  <..          >volume id  
<End DATASET group>
```

Figure 17. Begin and End Resource Group SFI Sequence

The begin and end resource group SFIs identify when output for a particular resource, such as a data set, begins and ends. The pairs of Begin and End Resource Group SFIs are shown in Figure 18 on page 33.

```

<Begin BIN group>           <End BIN group>
<Begin CONTROL group>     <End CONTROL group>
<Begin DATASET group>     <End DATASET group>
<Begin MESSAGE group>     <End MESSAGE group>
<Begin OWNER group>       <End OWNER group>
<Begin PRODUCT group>     <End PRODUCT group>
<Begin RACK group>        <End RACK group>
<Begin VOLUME group>     <End VOLUME group>
<Begin VRS group>         <End VRS group>

```

Figure 18. Begin and End Resource Group SFI Pairs

In addition to identifying the beginning and ending of output for a particular resource, the Begin and End Resource Group SFIs shown in Figure 19 are used to differentiate one subgroup of data from another in the output the DFSMSrmm API returns for the LISTCONTROL, LISTVOLUME, and SEARCHVOLUME subcommands.

```

<Begin ACCESS group>      <End ACCESS group>
<Begin ACTIONS group>    <End ACTIONS group>
<Begin CNTL group>       <End CNTL group>
<Begin LOCDEF group>     <End LOCDEF group>
<Begin MNTMSG group>     <End MNTMSG group>
<Begin MOVES group>      <End MOVES group>
<Begin OPTION group>     <End OPTION group>
<Begin REJECT group>     <End REJECT group>
<Begin SECCLS group>     <End SECCLS group>
<Begin STATS group>      <End STATS group>
<Begin STORE group>      <End STORE group>
<Begin VLPOOL group>     <End VLPOOL group>
<Begin VOL group>        <End VOL group>

```

Figure 19. Begin and End Resource Group SFI Pairs for Subgroups

Groups and subgroups, such as MESSAGE and SECCLS, are repeated as often as necessary to differentiate resources.

System Return and Reason Code SFIs

When DFSMSrmm receives a non-zero return code from a system service, the system return code and associated reason code are put into your output buffer as shown in Figure 20. DFSMSrmm issues return code 116 and reason code 06 when an error like this occurs.

```

<Begin SYSRETC group>
  <SVCN - service name      : 16 , character:      >
  <RTNC - return code       : 4  , bin(31):         >
  <RSNC - reason code       : 4  , bin(31):         >
<End SYSRETC group>

```

Figure 20. System Return and Reason Codes

The DFSMSrmm API returns the same SFIs for both line format and field format.

Messages and Message Variables SFIs

When messages or message variables are returned to you as output data, they are put into your output buffer as structured fields as shown in Figure 21.

```

    <MSGL - message line          : nn , character:      >
    <MSGL - message line          : nn , character:      >

or

    <Begin MESSAGE group>
    <MSGN - message number        : 8 , character:      >
    <xxx - variable>
    <End MESSAGE group>
    <Begin MESSAGE group>
    <MSGN - message number        : 8 , character:      >
    <xxx - variable>
    <End MESSAGE group>

```

Figure 21. SFIs for Messages and Message Variables

When you specify OUTPUT=LINES, messages issued by DFSMSrmm are placed in your output buffer using the LINE SFI.

When you specify OUTPUT=FIELDS, only the messages listed in Table 7 are placed in your output buffer. These messages, some of which are issued only in conjunction with a subcommand parameter such as POOL or COUNT, are included in the output because they contain data and codes that can be especially useful to your application. Your application program should use the return and reason codes that it receives rather than messages to determine whether or not the subcommand request successful.

Table 7 lists:

- The Structured Field Introducers that follow the <MSGN> SFI
- The applicable subcommands
- A non-inclusive list of the return codes (RC) and reason codes (RSN).

Table 7. Message Related SFIs

Message	SFI ID(s)	Subcommand(s)	RC	RSN(s)
EDG3010	ENTN	All SEARCH subcommands when no (0) entry is returned	4	8
EDG3011	ENTN	All SEARCH subcommands when 1 entry returned	0 4	0 2 and 4
EDG3012	ENTN	All SEARCH subcommands when > 1 entry returned	0 4	0 2 and 4
EDG3013	VOL	AV	12	many
EDG3014	CNT	AV	12	many
EDG3015	OWN VOL	GV	0	0
EDG3016	RCK	AV CV	0	0
EDG3017	RCK	AB AR	12	18 68 70
EDG3018	CNT	AB AR	12	18 68 70

Table 7. Message Related SFIs (continued)

Message	SFI ID(s)	Subcommand(s)	RC	RSN(s)
EDG3019	RCK	DB DR	12	many
EDG3020	CNT	DB DR	12	many
EDG3277	FRC FRS	AV CV	12	122
EDG3278	CSG	AV CV	12	124
EDG3288	FRC FRS VOL	CV DV	12	132
EDG3289	FRC FRS	CV	12	134
EDG3292	CLIB	AV CV	12	140
EDG3301	FRC FRS	AV CV GV	12	152
EDG3310	CLIB	CV DV	12	170
EDG3311	FRC FRS	AV CV DV	12	172
EDG3314	MEDN	CV	12	176
EDG3328	KEYF KEYT TYPF TYPT	SD SV	4	12
EDG3355	VOL1	AV CV	12	240

For a detailed explanation of these messages, see *z/OS MVS System Messages, Vol 5 (EDG-GFS)*. For a description of messages, use LookAt, described in “Using LookAt to look up message explanations” on page xii. For DFSMSrmm return and reason codes, see *z/OS DFSMSrmm Guide and Reference*.

SFIs for Output Data for Subcommands

When you specify OUTPUT=LINES, the DFSMSrmm API returns output data, except for system return and reason codes, as formatted lines in structured fields. The structured fields are introduced by the <LINE> and <MSGL> Structured Field Introducers as shown in Figure 22. DFSMSrmm places system return codes and reason codes in your output buffer as described in “System Return and Reason Code SFIs” on page 33.

```
<Begin resource group>
  <LINE - Formatted output line   : nn , character:   >
  <LINE - Formatted output line   : nn , character:   >
  <MSGL - Formatted output message: nn , character:   >
  <MSGL - Formatted output message: nn , character:   >
<End resource group>
```

Figure 22. Formatted Lines

When you specify OUTPUT=FIELDS, the DFSMSrmm API returns output data as unformatted data in structured fields.

ADD-Type of Subcommands

The DFSMSrmm ADD-type of subcommands are: ADDBIN, ADDDATASET, ADDOWNER, ADDPRODUCT, ADDRACK, ADDVOLUME, and ADDVRS. You use these subcommands to add information to the DFSMSrmm control data set.

The DFSMSrmm API returns information under the following conditions:

- You specify the ADDVOLUME subcommand with the POOL operand. The DFSMSrmm API returns the rack number that is assigned to the volume in the format as shown in Figure 23.
- An error occurs for specific return and reason code combinations described “Messages and Message Variables SFIs” on page 34 and “SFIs for Return and Reason Codes” on page 54.

```
<Begin VOLUME group>
  <Begin MESSAGE group>
    <MSGN - message number          : 8 , character:      >
    <RCK - rack or bin number       : 6 , character:      >
  <End MESSAGE group>
<End VOLUME group>
```

Figure 23. SFIs for ADDVOLUME with OUTPUT=FIELDS

CHANGE-Type of Subcommands

The DFSMSrmm CHANGE-type of subcommands are: CHANGEDATASET, CHANGEOWNER, CHANGEPRODUCT, and CHANGEVOLUME. You use these subcommands to change information in the DFSMSrmm control data set.

The DFSMSrmm API returns information when:

- You specify the CHANGEVOLUME subcommand with the POOL operand. The DFSMSrmm API returns the rack number that is assigned to the volume in the format as shown in Figure 24.
- When an error occurs for specific return and reason code combinations described “Messages and Message Variables SFIs” on page 34 and “SFIs for Return and Reason Codes” on page 54.

```
<Begin VOLUME group>
  <Begin MESSAGE group>
    <MSGN - message number          : 8 , character:      >
    <RCK - rack or bin number       : 6 , character:      >
  <End MESSAGE group>
<End VOLUME group>
```

Figure 24. SFIs for CHANGEVOLUME with OUTPUT=FIELDS

DELETE-Type of Subcommands

The DFSMSrmm DELETE-type of subcommands are: DELETEBIN, DELETEDATASET, DELETEOWNER, DELETEPRODUCT, DELETERACK, DELETEVOLUME, and DELETEVRS. You use these subcommands to delete information from the DFSMSrmm control data set.

The DFSMSrmm API returns information when an error occurs for specific return and reason code combinations described “Messages and Message Variables SFIs” on page 34 and “SFIs for Return and Reason Codes” on page 54.

GETVOLUME Subcommand

You use the RMM GETVOLUME subcommand to obtain a volume from DFSMSrmm.

The DFSMSrmm API returns information when:

- The GETVOLUME request was successful. The DFSMSrmm API returns volume information and owner information as shown in Figure 25.
- When an error occurs, and then only for specific return and reason code combinations described “Messages and Message Variables SFIs” on page 34 and “SFIs for Return and Reason Codes” on page 54.

```
<Begin VOLUME group>
  <Begin MESSAGE group>
    <MSGN - message number      : 8 , character:    >
    <VOL - volume serial        : 6 , character:    >
    <OWN - owner                 : 8 , character:    >
  <End MESSAGE group>
<End VOLUME group>
```

Figure 25. SFIs for GETVOLUME with OUTPUT=FIELDS

LIST-Type of Subcommands

The DFSMSrmm LIST-type of subcommands are: LISTBIN, LISTCONTROL, LISTDATASET, LISTOWNER, LISTPRODUCT, LISTRACK, LISTVOLUME, and LISTVRS. You use these subcommands to obtain information from the DFSMSrmm control data set about a single resource.

The DFSMSrmm API returns output data for LIST type of subcommands as structured fields when you specify OUTPUT=FIELDS. The Structured Field Introducers for each type of LIST subcommand are found in:

- “LISTBIN SFIs”
- “LISTCONTROL SFIs” on page 38
- “LISTDATASET SFIs” on page 41
- “LISTOWNER SFIs” on page 42
- “LISTPRODUCT SFIs” on page 42
- “LISTRACK SFIs” on page 42
- “LISTVOLUME SFIs” on page 43
- “LISTVRS SFIs” on page 45

LISTBIN SFIs

The SFIs produced for the LISTBIN subcommand with OUTPUT=FIELDS are shown in Figure 26.

```
<Begin RACK or BIN group>
  <RCK - rack or bin number    : 6 , character:    >
  <VOL - volume serial        : 6 , character:    >
  <RST - rack or bin status    : 1 , bin(8):      >
  <LOC - location             : 6 , character:    >
  <MEDN - media name          : 8 , character:    >
  <MIV - moving-in volume     : 6 , character:    >
  <MOV - moving-out volume    : 6 , character:    >
  <OVOL - old volume          : 6 , character:    >
<End RACK or BIN Group>
```

Figure 26. SFIs for LISTBIN with OUTPUT=FIELDS

LISTCONTROL SFIs

The SFIs produced for the LISTCONTROL subcommand with OUTPUT=FIELDS are shown in Figure 27.

```
<Begin CONTROL group>
  <Begin CNTL group>
    <MTP - CDS type : 1 , bin(8): >
    <MDTJ - CDS create date : 4 , packed decimal: >
    <MTM - CDS create time : 4 , packed decimal: >
    <JRNU - journal percentage used : 2 , bin(15): >
    <JRNF - JOURNALFULL parmlib value: 2 , bin(15): >
    <JRNS - Journal status : 2 , bin(15): >
    <BDTJ - last CDS backup date : 4 , packed decimal: >
    <BTM - last CDS backup time : 4 , packed decimal: >
    <JBDT - last journal backup date : 4 , packed decimal: >
    <JBTM - last Journal backup time : 4 , packed decimal: >
    <XDTJ - expiration date : 4 , packed decimal: >
    <XTM - last inven mgmt exp time : 4 , packed decimal: >
    <RDTJ - last CDS extract date : 4 , packed decimal: >
    <RTM - last CDS extract time : 4 , packed decimal: >
    <DDTJ - last store update date : 4 , packed decimal: >
    <DTM - last store update time : 4 , packed decimal: >
    <SOSJ - last XPROC start date : 4 , packed decimal: >
    <SOST - last XPROC start time : 4 , packed decimal: >
    <VDTJ - last VRSEL date : 4 , packed decimal: >
    <VTM - last VRSEL time : 4 , packed decimal: >
    <LRK - # LIBRARY rack numbers : 4 , bin(31): >
    <FRK - free rack numbers in lib : 4 , bin(31): >
    <LBN - bin numbers in LOCAL : 4 , bin(31): >
    <FLB - free bin numbers in LOCAL: 4 , bin(31): >
    <DBN - bin numbers in DISTANT : 4 , bin(31): >
    <FDB - free bins in DISTANT loc : 4 , bin(31): >
    <RBN - # bin numbers in REMOTE : 4 , bin(31): >
    <FRB - free bin nums in REMOTE : 4 , bin(31): >
    <CACT - control active functions : 1 , bit(8): >
    <CSDT - Catalog Synchronize date : 4 , packed decimal: >
    <CSTM - Catalog Synchronize time : 4 , packed decimal: >
    <FCSP - Catalog Sync in progress : 1 , bin(8): >
    <CSVE - Stacked volume enabled : 1 , bin(8): >
    <X100 - EDGUX100 exit status : 1 , bin(8): >
    <X200 - EDGUX200 exit status : 1 , bin(8): >
    <EBIN - extended bin enable statu: 1 , bin(8): >
    <CDSU - CDS percentage used : 2 , bin(15): >
  <End CNTL group>
```

Figure 27. SFIs for LISTCONTROL with OUTPUT=FIELDS (Part 1 of 3)

```

<Begin OPTION group>
  <OPM - operating mode           : 1 , bin(8):           >
  <DRP - default retention period : 4 , bin(31):           >
  <MRP - maximum retention period : 4 , bin(31):           >
  <CRP - CATRETPD retention period: 4 , bin(31):           >
  <MDS - CDS data set name        : 44 , character:         >
  <JDS - journal name             : 44 , character:         >
  <JRNF - JOURNALFULL parmlib value: 2 , bin(15):          >
  <CATS - CATSYSID value          : 1 , bin(8):             >
  <SOSP - scratch procedure name   : 8 , character:         >
  <BKPP - backup procedure name    : 8 , character:         >
  <IPL - data check reqd in IPL    : 1 , bin(8):             >
  <DTE - installation date format  : 1 , bin(8):             >
  <RCF - installation RACF support: 1 , bin(8):             >
  <AUD - SMF audit record number   : 2 , bin(15):           >
  <SSM - SMF security rcd number   : 2 , bin(15):           >
  <CDS - control data set ID       : 8 , character:         >
  <SLM - MAXHOLD value            : 2 , bin(15):           >
  <LCT - default lines per page    : 2 , bin(15):           >
  <SID - RMM system ID            : 8 , character:         >
  <BLP - BLP option                : 1 , bin(8):             >
  <NOT - Notify option            : 1 , bin(8):             >
  <UNC - uncatalog option         : 1 , bin(8):             >
  <VRJ - VRS job name             : 1 , bin(8):             >
  <MSGF - case of message text     : 1 , bin(8):             >
  <MOP - master overwrite         : 1 , bin(8):             >
  <ACCT - accounting source        : 1 , bin(8):             >
  <VCHG - VRSCCHANGE value        : 1 , bin(8):             >
  <VRSL - VRSEL value             : 1 , bin(8):             >
  <PSFX - parmlib member suffix    : 2 , character:         >
  <VACT - VRSMIN action           : 1 , bin(8):             >
  <VMIN - VRSMIN count value       : 4 , bin(31):           >
  <DSPD - Disposition DD name      : 8 , character:         >
  <DSPM - Disposition message pref: 8 , character:         >
  <RTBY - Retain by              : 1 , bin(8):             >
  <MVBY - Move by                : 1 , bin(8):             >
  <PDA - PDA state                : 1 , bin(8):             >
  <PDAC - PDA block count         : 1 , bin(8):             >
  <PDAS - PDA block size          : 1 , bin(8):             >
  <PDAL - PDA log state           : 1 , bin(8):             >
  <TVXP - Extradays retention     : 1 , bit(8):            >
  <SMP - System-managed tape purge: 1 , bin(8):             >
  <SMU - System-managed tape updat: 1 , bin(8):             >
  <ACS - SMS ACS support enabled   : 1 , bin(8):             >
  <PACS - PRE ACS support enabled  : 1 , bin(8):             >
  <RUB - reuse bin at            : 1 , bin(8):             >
  <CMDD - Command Auth DSN        : 1 , bin(8):             >
  <CMDO - Command Auth owner      : 1 , bin(8):             >
  <MEDN - media name              : 8 , character:         >
<End OPTION group>
<Begin SECCLS group>
  <SEC - security class number     : 1 , bin(8):             >
  <NME - security class name      : 8 , character:         >
  <SCST - sec class status        : 1 , bit(8):            >
  <CLS - sec class description    : 32 , character:         >
<End SECCLS group>

```

Figure 27. SFIs for LISTCONTROL with OUTPUT=FIELDS (Part 2 of 3)

```

<Begin VLPOOL group>
  <PID - pool prefix           : 6 , character:      >
  <PSN - pool definition system ID: 8 , character:    >
  <PRF - pool definition RACF opt : 1 , bin(8):      >
  <PTP - pool definition pool type: 1 , bin(8):      >
  <XDC - expiration date check   : 1 , bin(8):      >
  <PLN - pool name               : 8 , character:    >
  <MEDN - media name             : 8 , character:    >
  <PDS - pool description        : 40 , character:   >
<End VLPOOL group>
<Begin MNTMSG group>
  <MID - mount message ID       : 12 , character:   >
  <SMI - offset, message ID (msg) : 2 , bin(15):    >
  <OVL - offset to volume serial : 2 , bin(15):    >
  <OPL - offset to rack num/poolid: 2 , bin(15):    >
<End MNTMSG group>
<Begin REJECT group>
  <GRK - generic rack number     : 6 , character:   >
  <TAC - reject prefix type      : 1 , bin(8):      >
<End REJECT group>
<Begin LOCDEF group>
  <LDDF - location definition exist: 1 , bin(8):    >
  <LDLC - location name         : 8 , character:    >
  <LDMT - location mgmt type    : 1 , bin(8):      >
  <LDLT - location type        : 1 , bin(8):      >
  <LDPR - location priority     : 4 , bin(31):     >
  <LDMN - location media name   : 8 , character:    >
<End LOCDEF group>
<Begin ACTIONS group>
  <ACT - actions on release     : 1 , bit(8):      >
  <AST - action status         : 1 , bit(8):      >
<End ACTIONS group>
<Begin MOVES group>
  <MFR - source location name   : 8 , character:   >
  <MST - move status           : 1 , bin(8):      >
  <MTO - target location name   : 8 , character:   >
  <MTY - move type             : 1 , bin(8):      >
<End MOVES group>
<End CONTROL group>

```

Figure 27. SFIs for LISTCONTROL with OUTPUT=FIELDS (Part 3 of 3)

When there is no information for a subgroup, such as MOVES, for the LISTCONTROL subcommand, the DFSMSrmm API returns all of the SFIs in the subgroup with no data. For example, when there are no outstanding volume actions, the DFSMSrmm API returns the MOVES subgroup (MFR, MST, MTO and MTY) with no data.

When DFSMSrmm cannot return all the output data for the LISTCONTROL subcommands in your output buffer, you must specify OPERATION=CONTINUE after processing your output buffer to obtain the rest of the LISTCONTROL output data.

Related Reading: See “Using the CONTINUE Operation in the EDGXCI Macro” on page 15 for additional information.

LISTDATASET SFIs

The SFIs produced for the LISTDATASET subcommand with OUTPUT=FIELDS are shown in Figure 28.

```
<Begin DATASET group>
<DSN - data set name           : 44 , character:      >
<CJBN - job name               : 8 , character:      >
<VOL - volume serial          : 6 , character:      >
<OWN - owner                   : 8 , character:      >
<DSEQ - data set sequence     : 4 , bin(31):        >
<DEV - device number (address) : 4 , hexadecimal:  >
<FILE - physical file sequence : 4 , bin(31):        >
<CDTJ - create date           : 4 , packed decimal:  >
<CTM - create time            : 4 , packed decimal:  >
<SYS - SMF system id          : 8 , character:      >
<BLKS - block size            : 4 , bin(31):        >
<BLKC - block count           : 4 , bin(31):        >
<LRCL - logical record length : 4 , bin(31):        >
<RCFM - record format         : 4 , character:      >
<DC - data class              : 8 , character:      >
<DLWJ - date last written     : 4 , packed decimal:  >
<DLRJ - date last read       : 4 , packed decimal:  >
<STEP - step name             : 8 , character:      >
<DD - dd name                 : 8 , character:      >
<MC - management class       : 8 , character:      >
<SG - storage group name     : 8 , character:      >
<SC - storage class           : 8 , character:      >
<VMV - VRS management value   : 8 , character:      >
<RTDJ - retention date       : 4 , packed decimal:  >
<VTYP - Primary VRS type     : 1 , bin(8):        >
<VJBN - Primary VRS job      : 8 , character:      >
<VNME - Primary VRS name     : 44 , character:     >
<VSCN - Primary VRS subchain name: 8 , character:  >
<VSCD - Primary VRS subchain date: 4 , packed decimal: >
<VRSR - VRS retained         : 1 , bin(8):        >
<NME - security class name   : 8 , character:      >
<CLS - sec class description  : 32 , character:     >
<ABND - Abend while open     : 1 , bin(8):        >
<CTLG - Catalog status       : 1 , bin(8):        >
<2JBN - Secondary VRS jobme mask: 8 , character:  >
<2NME - Secondary VRS mask   : 8 , character:      >
<2SCN - Second. VRS subchain name: 8 , character:  >
<2SCD - Second. VRS subchain date: 4 , packed decimal: >
<BLKT - Total block count    : 4 , bin(31):        >
<CPGM - Creating program name : 4 , bin(31):        >
<LPGM - Last used program name : 8 , character:  >
<LJOB - Last used job        : 8 , character:      >
<LSTP - Last used step name   : 4 , packed decimal:  >
<LDD - Last used DD name     : 4 , bin(31):        >
<LDEV - Last drive           : 4 , bin(31):        >
<DPCT - Percent of volume    : 4 , bin(31):        >
<End DATASET group>
```

Figure 28. SFIs for LISTDATASET with OUTPUT=FIELDS

LISTOWNER SFIs

The SFIs produced for the LISTOWNER subcommand with OUTPUT=FIELDS are shown in Figure 29.

```
<Begin OWNER group>
  <OWN - owner                : 8 , character:    >
  <SUR - owner's surname      : 20 , character:   >
  <FOR - owner's forename     : 20 , character:   >
  <DPT - owner's department   : 40 , character:   >
  <ADL - address line         : 40 , character:   >
  <ADL - address line         : 40 , character:   >
  <ADL - address line         : 40 , character:   >
  <ITL - owner's internal tel num : 8 , character: >
  <ETL - owner's external tele num: 20 , character: >
  <EMU - owner's user ID       : 8 , character:   >
  <EMN - owner's node         : 8 , character:   >
  <VLN - number of volumes     : 4 , bin(31):    >
<End OWNER group>
```

Figure 29. SFIs for LISTOWNER with OUTPUT=FIELDS

LISTPRODUCT SFIs

The SFIs produced for the LISTPRODUCT subcommand with OUTPUT=FIELDS are shown in Figure 30.

```
<Begin PRODUCT group>
  <PNUM - software product number : 8 , character:    >
  <VER - software product version : 6 , character:    >
  <OWN - owner                     : 8 , character:    >
  <PNME - product software name    : 30 , character:   >
  <PDSC - product description      : 32 , character:   >
  <VOL - volume serial             : 6 , character:    >
  <RCK - rack or bin number        : 6 , character:    >
  <FCD - product feature code      : 4 , character:    >
  <VLN - number of volumes         : 4 , bin(31):    >
<End PRODUCT group>
```

Figure 30. SFIs for LISTPRODUCT with OUTPUT=FIELDS

LISTRACK SFIs

The SFIs produced for the LISTRACK subcommand with OUTPUT=FIELDS are shown in Figure 31.

```
<Begin RACK or BIN group>
  <RCK - rack or bin number       : 6 , character:    >
  <VOL - volume serial           : 6 , character:    >
  <RST - rack or bin status       : 1 , bin(8):      >
  <LOC - location                 : 8 , character:    >
  <MEDN - media name              : 8 , character:    >
  <PID - pool prefix              : 6 , character:    >
<End RACK or BIN Group>
```

Figure 31. SFIs for LISTRACK with OUTPUT=FIELDS

LISTVOLUME SFIs

The SFIs produced for the LISTVOLUME subcommand with OUTPUT=FIELDS are shown in Figure 32.

```
<Begin VOLUME group>
  <Begin VOL group>
    <VOL - volume serial           : 6 , character:      >
    <RCK - rack or bin number     : 6 , character:      >
    <OWN - owner                   : 8 , character:      >
    <CJBN - job name              : 8 , character:      >
    <CDTJ - create date           : 4 , packed decimal:  >
    <CTM - create time            : 4 , packed decimal:  >
    <ADTJ - assigned date        : 4 , packed decimal:  >
    <ATM - assigned time         : 4 , packed decimal:  >
    <XDTJ - expiration date      : 4 , packed decimal:  >
    <OXDJ - original expiration date : 4 , packed decimal:  >
    <RTDJ - retention date       : 4 , packed decimal:  >
    <DSN - data set name         : 44 , character:      >
    <VST - volume status         : 1 , bit(8):          >
    <OCE - volume info recorded OCE : 1 , bin(8):          >
    <AVL - volume availability    : 1 , bit(8):          >
    <LBL - volume label type     : 1 , bit(8):          >
    <DEN - media density         : 1 , bin(8):          >
    <MEDT - media type           : 1 , bin(8):          >
    <MEDR - media recording format : 1 , bin(8):          >
    <MEDC - media compaction     : 1 , bin(8):          >
    <MEDA - media special attributes : 1 , bin(8):          >
    <ACT - actions on release    : 1 , bit(8):          >
    <PEND - actions pending      : 1 , bit(8):          >
    <SG - storage group name     : 8 , character:      >
    <LOAN - loan location        : 8 , character:      >
    <ACN - account number       : 40 , character:      >
    <DESC - volume description   : 30 , character:      >
    <NME - security class name   : 8 , character:      >
    <CLS - sec class description  : 32 , character:      >
    <VRSI - Scratch Immediate    : 1 , bit(8):          >
    <VRXI - Expiration date ignore : 1 , bit(8):          >
    <VOLT - Volume Type         : 1 , bit(8):          >
    <LVC - Current label version  : 1 , bit(8):          >
    <LVN - Requiredlabel version  : 1 , bit(8):          >
    <RBYS - Retain by set       : 1 , bit(8):          >
    <STVC - Stacked volume count : 4 , bin(31):         >
    <SYS - SMF System ID        : 8 , character:      >
    <DSYS - Creation System ID|stfile: 8 , character:      >
    <VOL1 - VOL1 label volser    : 6 , character:      >
  <End VOL group>
  <Begin ACCESS group>
    <OAC - owner access         : 1 , bin(8):          >
    <VAC - volume access        : 1 , bin(8):          >
    <LCID - last change user id  : 8 , character:      >
    <VM - VM use                 : 1 , bin(8):          >
    <MVS - MVS use               : 1 , bin(8):          >
    <UID - user id               : 8 , character:      >
  <End ACCESS group>
```

Figure 32. SFIs for LISTVOLUME with OUTPUT=FIELDS (Part 1 of 2)

```

<Begin STAT group>
  <DSC - data set count           : 4 , bin(31):      >
  <DSR - data set recording       : 1 , bin(8):      >
  <USEM - volume usage (kb)      : 4 , bin(31):      >
  <USEC - volume use count       : 4 , bin(31):      >
  <DLRJ - date last read        : 4 , packed decimal: >
  <DLWJ - date last written     : 4 , packed decimal: >
  <LDEV - last drive            : 4 , character:      >
  <SEQ - volume sequence        : 4 , fixed(31):      >
  <MEDN - media name            : 8 , character:      >
  <PVL - previous volume        : 6 , character:      >
  <NVL - next volume            : 6 , character:      >
  <PNUM - software product number : 8 , character:      >
  <VER - software product version : 6 , character:      >
  <FCD - product feature code   : 4 , character:      >
  <TRD - temporary read errors  : 4 , bin(31):      >
  <TWT - temporary write errors : 4 , bin(31):      >
  <PRD - permanent read errors  : 4 , bin(31):      >
  <PWT - permanent write errors : 4 , bin(31):      >
  <VCAP - volume capacity       : 4 , bin(31):      >
  <VPCT - volume percent full   : 1 , bin(8):      >
<End STAT group>
<Begin STORE group>
  <LOC - location                : 8 , character:      >
  <LOCT - location type         : 1 , bin(8):      >
  <DEST - destination           : 8 , character:      >
  <DSTT - destination type     : 1 , bin(8):      >
  <INTR - volume intransit status : 1 , bin(8):      >
  <HLOC - home location        : 8 , character:      >
  <HLOT - home location type   : 1 , bin(8):      >
  <OLOC - old location         : 8 , character:      >
  <OLOT - old location type    : 1 , bin(8):      >
  <NLOC - required location    : 8 , character:      >
  <NLOT - required location type : 1 , bin(8):      >
  <SDTJ - movement tracking date : 4 , packed decimal: >
  <MOVM - move mode            : 1 , bin(8):      >
  <BIN - bin number            : 6 , character:      >
  <BMN - bin number media name  : 8 , character:      >
  <OBN - old bin number        : 6 , character:      >
  <OBMN - old bin number media name: 8 , character:      >
  <CTNR - Container            :16 , character:      >
  <DBIN - destination bin number : 6 , character:      >
  <DBMN - destination bin media nam: 8 , character:      >
<End STORE group>
<End VOLUME group>

```

Figure 32. SFIs for LISTVOLUME with OUTPUT=FIELDS (Part 2 of 2)

LISTVRS SFIs

The SFIs produced for the LISTVRS subcommand with OUTPUT=FIELDS are shown in Figure 33.

```
<Begin VRS group>
<VRS - vital rcd specification : 44 , character: >
<TYP - VRS type : 1 , bit(8): >
<VJBN - Primary VRS job name : 8 , character: >
<VRC - vital record count : 2 , bin(31): >
<RET - retention type : 3 , bin(8): >
<VDD - VRS delay days : 2 , bin(15): >
<LOC - location : 8 , character: >
<SC1 - VRS store number : 4 , bin(31): >
<PRTY - priority : 4 , bin(31): >
<NVRS - next VRS name : 8 , character: >
<OWN - owner : 8 , character: >
<DESC - volume or vrs description: 30 , character: >
<DDTJ - delete date : 4 , packed decimal: >
<VANX - Next VRS Type : 1 , bit(8): >
<VRSI - Scratch Immediate : 1 , bit(8): >
<VRXI - Expiration date ignore : 1 , bit(8): >
<End VRS group>
```

Figure 33. SFIs for LISTVRS with OUTPUT=FIELDS

SEARCH-Type of Subcommands

The DFSMSrmm SEARCH-type of subcommands are: SEARCHBIN, SEARCHDATASET, SEARCHPRODUCT, SEARCHRACK, SEARCHVOLUME, and SEARCHVRS. You use these subcommands to obtain information from the DFSMSrmm control data set about resources defined to DFSMSrmm.

When you specify OUTPUT=FIELDS, the DFSMSrmm API returns data for all SEARCH type of subcommands as structured fields. DFSMSrmm returns the output data for a single resource in your output buffer each time you call the API. You must specify OPERATION=CONTINUE after processing your output buffer to obtain the output data for the next resource. Continue to call the DFSMSrmm API until the output data for all matching resources has been returned.

Related Reading: See “Using the CONTINUE Operation in the EDGXCI Macro” on page 15 for additional information.

The DFSMSrmm API returns expanded output data for the RMM TSO SEARCHDATASET, SEARCHPRODUCT, SEARCHVOLUME, and SEARCHVRS subcommands when you also specify the EXPAND=YES parameter.

SEARCHBIN SFIs

Figure 34 shows the output that DFSMSrmm returns when you specify the SEARCHBIN subcommand and the EDGXCI macro OUTPUT=FIELDS and EXPAND=NO parameters.

```
<Begin RACK or BIN group>
  <RCK - rack or bin number      : 6 , character:      >
  <VOL - volume serial           : 6 , character:      >
  <RST - rack or bin status      : 1 , bin(8):        >
  <LOC - location                : 8 , character:      >
  <MEDN - media name             : 8 , character:      >
  <MIV - moving-in volume       : 6 , character:      >
  <MOV - moving-out volume      : 6 , character:      >
  <OVOL - old volume             : 6 , character:      >
<End RACK or BIN Group>
```

Figure 34. SFIs for SEARCHBIN with OUTPUT=FIELDS,EXPAND=NO

SEARCHDATASET SFIs

Figure 35 shows the output DFSMSrmm returns when you specify the SEARCHDATASET subcommand and the EDGXCI macro OUTPUT=FIELDS and EXPAND=NO parameters.

The expanded output that DFSMSrmm returns when you specify the SEARCHDATASET subcommand with the OUTPUT=FIELDS and EXPAND=YES parameters is the same as shown in “LISTDATASET SFIs” on page 41 for LISTDATASET.

```
<Begin DATASET group>
  <DSN - data set name           : 44 , character:      >
  <VOL - volume serial           : 6 , character:      >
  <OWN - owner                   : 8 , character:      >
  <CDTJ - create date            : 4 , packed decimal:  >
  <CTM - create time             : 4 , packed decimal:  >
  <FILE - physical file sequence : 4 , bin(31):      >
<End DATASET group>
```

Figure 35. SFIs for SEARCHDATASET with OUTPUT=FIELDS,EXPAND=NO

SEARCHPRODUCT SFIs

Figure 36 on page 47 shows the output DFSMSrmm returns when you specify the SEARCHPRODUCT subcommand and the EDGXCI macro OUTPUT=FIELDS and EXPAND=NO parameters.

The expanded output that DFSMSrmm returns when you specify the SEARCHPRODUCT subcommand with the OUTPUT=FIELDS and EXPAND=YES parameters is the same as shown in “LISTPRODUCT SFIs” on page 42 for LISTPRODUCT.

```

<Begin PRODUCT group>
  <PNUM - software product number : 8 , character:      >
  <VER - software product version : 6 , character:      >
  <PNME - product software name   : 30 , character:     >
  <FCD - product feature code     : 4 , character:     >
  <VLN - number of volumes        : 4 , bin(31):       >
  <VOL - volume serial            : 6 , character:     >
<End PRODUCT group>

```

Figure 36. SFIs for SEARCHPRODUCT with OUTPUT=FIELDS,EXPAND=NO

SEARCHRACK SFIs

Figure 37 shows the output DFSMSrmm returns when you specify the SEARCHRACK subcommand and the EDGXCI macro OUTPUT=FIELDS and EXPAND=NO parameters.

```

<Begin RACK or BIN group>
  <RCK - rack or bin number       : 6 , character:      >
  <VOL - volume serial            : 6 , character:      >
  <RST - rack or bin status       : 1 , bin(8):        >
  <LOC - location                 : 8 , character:     >
  <MEDN - media name              : 8 , character:     >
  <PID - pool prefix              : 6 , character:     >
<End RACK or BIN Group>

```

Figure 37. SFIs for SEARCHRACK with OUTPUT=FIELDS,EXPAND=NO

SEARCHVOLUME SFIs

Figure 38 on page 48 shows the output DFSMSrmm returns when you specify the SEARCHVOLUME subcommand and the EDGXCI macro OUTPUT=FIELDS and EXPAND=NO parameters.

The expanded output that DFSMSrmm returns when you specify the SEARCHVOLUME subcommand with the OUTPUT=FIELDS and EXPAND=YES parameters is the same as shown in "LISTVOLUME SFIs" on page 43 for LISTVOLUME.

```

<Begin VOLUME group>
<VOL - volume serial          : 6 , character:      >
<OWN - owner                  : 8 , character:      >
<RCK - rack or bin number    : 6 , character:      >
<ADTJ - assigned date        : 4 , packed decimal:  >
<XDTJ - expiration date      : 4 , packed decimal:  >
<RTDJ - retention date       : 4 , packed decimal:  >
<LOC - location              : 8 , character:      >
<INTR - volume intransit status : 1 , bin(8):      >
<HLOC - home location        : 8 , character:      >
<DSC - data set count        : 4 , bin(31):      >
<VST - volume status         : 1 , bit(8):      >
<AVL - volume availability    : 1 , bit(8):      >
<LBL - volume label          : 1 , bit(8):      >
<MEDT - media type           : 1 , bin(8):      >
<MEDR - media recording format : 1 , bin(8):      >
<MEDC - media compaction      : 1 , bin(8):      >
<MEDA - media special attributes : 1 , bin(8):      >
<PEND - actions pending      : 1 , bit(8):      >
<LOAN - loan location        : 8 , character:      >
<DEST - destination          : 8 , character:      >
<DSR - data set recording    : 1 , bin(8):      >
<SEQ - volume sequence       : 4 , bin(31):      >
<MEDN - media name           : 8 , character:      >
<LVC - Current label version  : 1 , bit(8):      >
<LVN - Required label version : 1 , bit(8):      >
<End VOLUME group>

```

Figure 38. SFIs for SEARCHVOLUME with OUTPUT=FIELDS,EXPAND=NO

SEARCHVRS SFIs

Figure 39 shows the output DFSMSrmm returns when you specify the SEARCHVRS subcommand and the EDGXCI macro OUTPUT=FIELDS and EXPAND=NO parameters.

The expanded output that DFSMSrmm returns when you specify the SEARCHVRS subcommand with the OUTPUT=FIELDS and EXPAND=YES parameters is the same as shown in "LISTVRS SFIs" on page 45 for LISTVRS.

```

<Begin VRS group>
<VRS - vital rcd specification : 44 , character:      >
<TYP - VRS type               : 1 , bit(8):      >
<VJBN - Primary VRS job name  : 8 , character:      >
<RET - retention type         : 3 , bin(8):      >
<LOC - location               : 8 , character:      >
<PRTY - priority              : 4 , bin(31):      >
<NVRS - next VRS name         : 8 , character:      >
<OWN - owner                  : 8 , character:      >
<DDTJ - delete date          : 4 , packed decimal:  >
<VANX - Next VRS Type        : 1 , bit(8):      >
<VRSI - Scratch Immediate     : 1 , bit(8):      >
<VRXI - Expiration date ignore : 1 , bit(8):      >
<End VRS group>

```

Figure 39. SFIs for SEARCHVRS with OUTPUT=FIELDS,EXPAND=NO

Controlling Output from List and Search Type Requests

The DFSMSrmm API returns information for a SEARCH type of subcommand or for a LISTCONTROL subcommand based on these factors:

- Whether you want line format or field format data.
- The size of your output buffer.
- The amount of output data.
- The LIMIT operand value used for a SEARCH type of subcommand.

Limiting the Search for a Request

Use the LIMIT keyword on SEARCH type of subcommands to limit the number of entries DFSMSrmm returns. To conserve use of system resources, such as dynamic storage, DFSMSrmm suspends a search operation after the number of entries matches the limit value you specify or the default limit value.

When you issue an RMM TSO Search type of subcommand, you can use the LIMIT operand to limit the number of entries returned. DFSMSrmm ends the search because the limit you set is reached or all available entries have been returned.

For an application program, the DFSMSrmm API causes DFSMSrmm to resume the search. LIMIT does not limit the total number of entries that the DFSMSrmm API returns to your application program and you cannot use LIMIT to end the subcommand before you have received all of the entries for a subcommand. Instead, you can specify OPERATION=CONTINUE regardless of whether limit has been reached, or begin a new command, or use EDGXCI OPERATION=RELEASE.

Output Buffer Examples

The examples in this section illustrate the following:

- SEARCH type subcommands (and LISTCONTROL) might require your application program to use one or more OPERATION=CONTINUE calls to the DFSMSrmm API to receive all of the search results.
- Your application program should expect to receive more than one set of return and reason codes. In the example, DFSMSrmm issued a different set of codes for each output buffer:
 - Return code 0, reason code 4.
 - Return code 4, reason code 2.
 - Return code 4, reason code 4.

Depending on the subcommand you specify, the search criteria you specify (fully or partially qualified names), and whether you specify a LIMIT value or LIMIT(*), DFSMSrmm can also issue the following:

- Return code 0, reason code 0.
- Return code 4, reason code 8.

For more information about the return codes and reason codes that the API returns, see Table 5 on page 16.

- Header lines for search lists are placed at the beginning of the first output buffer of each set of buffers: The first output buffer after OPERATION=BEGIN, and the first output buffer after OPERATION=CONTINUE in response to the return code 4 and reason code 2.
- Messages issued by DFSMSrmm and that are placed in your output buffers are introduced by <MSGL> SFIs rather than <LINE> SFIs.

- The number of output data lines that are placed in your buffer is dependent upon the interaction of the following:
 - The total number of searched records (entries).
 - The size of your output buffer.
 - The LIMIT value used for the search.

Figure 40, Figure 41 on page 51, and Figure 42 on page 51 display the contents of the output buffers when:

- Your application program issues an OPERATION=BEGIN, OUTPUT=LINES for a SEARCHRACK RACK(*) LIMIT(90) subcommand.
- Your application program is using a minimum size (4096 bytes) output buffer.
- There are 130 records in the RMM inventory.

First Output Buffer

The DFSMSrmm API issues return code 0 and reason code 4 and returns control to your application program. Your output buffer contains 78 structured fields.

In Figure 40:

- The group begins with the <Begin RACK or BIN group>.
- The structured fields between the Begin and End RACK group SFIs are all introduced by a <LINE> SFI.
- The first two lines after the Begin RACK group are the header lines for the list of RACK entries.
- The group ends with the <End RACK or BIN group>.

The DFSMSrmm API returns code 0 and reason code 4 when there is more output data. Specify the EDGXCI macro OPERATION=CONTINUE parameter to continue the subcommand request..

```
<Begin RACK or BIN group>
<LINE>Rack      Medianame  Volume  Status   Location
<LINE>-----  -
<LINE>020610   CART3480  020610  IN USE   SHELF
<LINE>020742   CART3480  020742  IN USE   SHELF
<LINE>021042   CART3480  021042  IN USE   SHELF
...
...
<LINE>030311   CART3480  030311  IN USE   SHELF
<LINE>030318   CART3480  030318  IN USE   SHELF
<End RACK or BIN group>
```

Figure 40. CONTINUE Example, First Output Buffer

Second Output Buffer

After processing the OPERATION=CONTINUE parameter, the DFSMSrmm API continues processing. The DFSMSrmm API issues return code 4 and reason code 2, returns control to your application program. Your output buffer contains 20 structured fields.


```

<Begin RACK or BIN group>
<LINE>031086  CART3480  031086  IN USE  SHELF
<LINE>031568  CART3480  031568  IN USE  SHELF
<LINE>031599  CART3480  031599  IN USE  TRON
...
...
<LINE>032848  CART3480  032848  IN USE  SHELF
<LINE>032898  CART3480  032898  IN USE  SHELF
<MSGL>EDG3203I SEARCH COMPLETE - MORE ENTRIES MAY EXIST
<MSGL>EDG3012I 90          ENTRIES LISTED
<End RACK or BIN group>

```

Figure 41. CONTINUE Example, Second Output Buffer

In Figure 41:

- There are no header lines in the second output buffer.
- There are only 16 output data lines (the LINE SFIs).
- The last output data line is followed by two message lines introduced by the <MSGL> SFI.

The DFSMSrmm API returns control to your application program even though there is room in the output buffer for more data. This is because the LIMIT value of 90 was reached as indicated by the second message line.

The return code 4 and reason code 2 indicate that more entries might exist. When you use OPERATION=CONTINUE, one of the following is likely to occur:

- When there are more entries, your application program receives control back with more output data in your output buffer.
- When there are no other entries, your application program receives control back with a buffer that is empty or that contains only messages.

Third (Last) Output Buffer

After the second OPERATION=CONTINUE, control is returned to your application program with return code 4 and reason code 4, and your output buffer contains 45 structured fields.

```

<Begin RACK or BIN group>
<LINE>Rack      Medianame  Volume  Status   Location
<LINE>-----  -
<LINE>032935  CART3480  032935  IN USE   SHELF
<LINE>032941  CART3480  032941  IN USE   SHELF
<LINE>032946  CART3480  032946  IN USE   SHELF
...
...
<LINE>070692  CART3480  070692  IN USE   SHELF
<LINE>070693  CART3480  070693  IN USE   SHELF
<MSGL>EDG3012I 40          ENTRIES LISTED
<End RACK or BIN group>

```

Figure 42. CONTINUE Example, Third (Last) Output Buffer

In Figure 42 on page 51:

- The first two lines after the Begin RACK group are the header lines that you saw in the first output buffer. This is the output for a second search that the DFSMSrmm API started when you specified OPERATION=CONTINUE in response to the return code 4 and reason code 2.
- The last output data line in your output buffer is followed by a single message line.
- The return code 4 and reason code 4 indicate that the subcommand was ended before the LIMIT value was reached.
- The total number of entries given to your application program in the three output buffers is 130: 74 in the first, 16 in the second, and 40 in the last output buffer.

Appendix A. Structured Field Introducers

This section defines the Structured Field Introducers used by the DFSMSrmm API to identify fields in API output.

SFI Format

All Structured Field Introducers (SFIs) have the following format:

Bytes Description

- | | |
|------------|---|
| 0-1 | 2-byte length: SFI length plus data length |
| 2-4 | 3-byte identifier: SFI ID (hexadecimal) |
| 5 | 1-byte type modifier: Type of SFI <ul style="list-style-type: none">• 0 = 8-byte, fixed-length SFI |
| 6 | 1-byte (Reserved) |
| 7 | 1-byte data type: Type of data, if any, that follows the SFI <ul style="list-style-type: none">• 0=Undefined (no data)• 1=Character (fixed-length)• 2=Bit(8) (1-byte flag, multiple bits can be on)• 3=Binary(8) (1-byte (hex) value)• 4=Binary(15) (2-byte (hex) value)• 5=Binary(31) (4-byte (hex) value)• 6=Reserved• 7=Character (variable-length)• 8=Reserved• 9=(4 bytes) Packed decimal Julian date: yyyydddC• A=(4 bytes) Packed decimal time format: hhmmssC |

Structured Field Lengths

All structured fields have a minimum length of 8 bytes (for the Structured Field Introducer). The length can be fixed-length or variable-length.

• **Fixed-length:**

The structured field has one of two length values: 8 when there is no data or the defined maximum length. For example, if the length is defined as X'000C' (decimal 12) for a particular structured field, the length in the SFI has a value of either X'0008' (no data) or X'000C' (data length = 4).

• **Variable-length:**

The structured field can have a length that varies from 8 (no data) up to maximum stated size. For example, because a data set name varies from 1 to 44 characters in length, the length value in an SFI for a data set name can be X'0008' (no data), or it can vary from X'0009' to X'0034' (9 to 52 decimal).

SFIs for Begin and End Resource Groups

Begin and End Resource Group SFIs identify when the output for a particular resource begins and ends. Begin and End Resource groups can be used to identify subgroups within a group. The Begin and End Resource groups are never followed by data. Table 8 shows SFIs that identify Begin and End resource groups.

Table 8. Begin and End Group Structured Field Introducers

Begin - End IDs	Resource Group
X'021000' - X'021080'	ACCESS - within VOLUME
X'022000' - X'022080'	ACTIONS - within CONTROL
X'024000' - X'024080'	CNTL - within CONTROL
X'025000' - X'025080'	CONTROL
X'026000' - X'026080'	DATASET
X'027000' - X'027080'	LOCDEF - within CONTROL
X'028000' - X'028080'	MESSAGE
X'029000' - X'029080'	MNTMSG - within CONTROL
X'02A000' - X'02A080'	MOVES - within CONTROL
X'02B000' - X'02B080'	OPTION - within CONTROL
X'02C000' - X'02C080'	OWNER
X'02D000' - X'02D080'	PRODUCT
X'02E000' - X'02E080'	RACK or BIN
X'02F000' - X'02F080'	REJECT - within CONTROL
X'030000' - X'030080'	SECCLS - within CONTROL
X'031000' - X'031080'	SECLVL - within CONTROL
X'032000' - X'032080'	STAT - within VOLUME
X'033000' - X'033080'	STORE - within VOLUME
X'034000' - X'034080'	SYSRETC
X'035000' - X'035080'	VLPOOL - within CONTROL
X'036000' - X'036080'	VOL - within VOLUME
X'037000' - X'037080'	VOLUME
X'038000' - X'038080'	VRS

SFIs for Return and Reason Codes

The SFIs shown in Table 9 on page 55 introduce return and reason codes in your output buffer.

- The DFSMSrmm API issues the return and reason code SFIs only when the subcommand fails. Each return and reason code pair is grouped within the SYSRETC group. The FRC and FRS SFIs are used for return and reason codes that are returned from OAM. The RSNC and RTNC SFIs are used for return and reason codes that are from another system service.

When the DFSMSrmm API builds a SYSRETC group for an error reported by a system service, look for additional information that is available from system messages in places like the operator terminal, SYSTSPRT, job log, and SYSLOG data set.

- Subcommands are described using standard DFSMSrmm abbreviations. For example, AV is for ADDVOLUME as shown in Table 3 on page 2.
- The SFI values are enclosed in single quotes (') to signify that they are 8-byte hexadecimal values. Two spaces are included in the IDs for readability.

Table 9. Reason and Return Code SFIs

SFI Number	SFI Name	SFI Length	SFI Data Type	Data Description	Subcommand
X'400000'	FRC	12	Binary(31)	Function return code	AV CV DV GV
X'401000'	FRS	12	Binary(31)	Function reason code	AV CV DV GV
X'402000'	RSNC	12	Binary(31)	Reason code	Any subcommand
X'403000'	RTNC	12	Binary(31)	Return code	Any subcommand
X'404000'	SVCN	16	Character (variable length)	Service name	Any subcommand

SFIs for Messages and Message Variables

The SFIs described in Table 10 introduce messages and message variables that the DFSMSrmm API places in your output buffer:

- MSGL is used when OUTPUT=LINES.
- MSGN and ENTN are used when OUTPUT=FIELDS.
- The SFI definitions are enclosed in single quotes (') to signify that they are 8-byte values and the two spaces are inserted for readability.

The MSGN and ENTN SFIs are always grouped within the MESSAGE group. The MSGL SFIs are grouped within the MESSAGE group when the DFSMSrmm API is unable to determine which subcommand type the message is for. One or more SFIs other than ENTN might follow MSGN as described in “Messages and Message Variables SFIs” on page 34.

Table 10. Message SFIs

SFI Number	SFI Name	SFI Length	SFI Data Type	Data Description	Subcommand
X'051000'	MSGL	259	Character (variable length)	Message line	Any subcommand
X'052000'	MSGN	16	Character (fixed length)	Message number ID	As previously defined
X'053000'	ENTN	12	Binary(31)	Number of entries Min 0, Max 10-digit	As previously defined
X'054000'	KEYF	64	Character (variable length)	Key from	SD SV
X'054200'	KEYT	64	Character (variable length)	Key to	SD SV
X'055000'	TYPF	16	Character (variable length)	VOLUME or DATASET	SD SV
X'055200'	TYPT	16	Character (variable length)	VOLUME or DATASET	SD SV

SFIs for Subcommand Output Data

The SFIs described in Table 11 introduce subcommand output data in your output buffer. These SFIs are always grouped within a pair of Begin and End Resource group SFIs.

The following notation is used:

- Subcommands are described using standard DFSMSrmm abbreviations. For example, LV is for LISTVOLUME and SS is for SEARCHVRS as described in Table 3 on page 2.
- The (e) following a search type of subcommand abbreviation means the expanded output is available if you specify EXPAND=YES. The absence of (e) means the SFI is used for both EXPAND=NO and EXPAND=YES.
- The range of two-byte and four-byte numbers is denoted by the minimum expected value and the maximum number of digits the number is expected to have. For example: "Min 1, Max 4-digit" means the minimum expected value of the number is one and the maximum expected number of digits in the number is four.
- The SFI definitions are enclosed in single quotes (') to signify that they are 8-byte values and the two spaces are inserted for readability. Bit data (flags) values are also enclosed in single quotes.

Table 11. Command SFIs

SFI Number	SFI Name	SFI Length	SFI Data Type	Data Description	Subcommand
X'800500'	ABND	9	Binary(8)	Abend while open 0=NO 1=YES	LD SD(e)
X'800800'	ACCT	9	Binary(8)	Accounting source 0=JOB 1=STEP	LC
X'801000'	ACN	48	Character (variable length)	Account number	LV SV(e)
X'801800'	ACS	9	Binary(8)	SMSACS 0=NO 1=YES	LC
X'802000'	ACT	9	Bit(8)	Actions on release '80'=SCRATCH '40'=REPLACE '20'=INIT '10'=ERASE '08'=RETURN '04'=NOTIFY	LC LV SV(e)
X'803001'	ADL	48	Character (variable length)	Address line ID is incremented by one for each SFI	LO
X'804000'	ADTJ	12	Packed decimal Julian date format	Assigned date	LV SV
X'805000'	AST	9	Bit(8)	Action status '80'=PENDING '40'=CONFIRMED '20'=COMPLETE '10'=UNKNOWN	LC
X'806000'	ATM	12	Packed decimal time format	Assigned time	LV SV(e)
X'807000'	AUD	10	Binary(8)	SMF audit record number: 128-155	LC

Table 11. Command SFIs (continued)

SFI Number	SFI Name	SFI Length	SFI Data Type	Data Description	Subcommand
X'808000'	AVL	9	Bit(8)	Volume availability '40'=PENDREL '20'=VITALRCD '08'=ONLOAN '04'=OPEN	LV SV
X'809000'	BDTJ	12	Packed decimal Julian date format	Last control data set backup date	LC
X'80A000'	BIN	14	Character (fixed length)	6-character alphanumeric bin number	LV SV(e)
X'80B000'	BKPP	16	Character (Variable length)	Backup procedure name	LC
X'80C000'	BLKC	12	Binary(31)	Block count: Min 0, Max 5-digit	LD SD(e)
X'80D000'	BLKS	12	Binary(31)	Block size: Min 0, Max 5-digit	LD SD(e)
X'80D030'	BLKT	12	Binary(31)	Total block count	LD SD(e)
X'80E000'	BLP	9	Binary(8)	BLP option: 0=RMM 1=NORMM	LC
X'80F000'	BMN	16	Character (variable length)	Bin number media name	LV SV(e)
X'810000'	BTM	12	Packed decimal time format	Last control data set backup time	LC
X'811000'	CACT	9	Bit(8)	Control active functions '80'=BACKUP '40'=RESTORE '20'=VERIFY '10'=EXPROC '08'=EXTRACT '04'=DSTORE '02'=VRSEL	LC
X'811800'	CATS	9	Binary(8)	CATSYSID value 0=SET 1=NOTSET 2=*	LC
X'812000'	CDS	16	Character (variable length)	Control data set identifier	LC
X'812A00'	CDSU	10	Binary(15)	Control data set percentage used	LC
X'813000'	CDTJ	12	Packed decimal Julian date format	Create date	LD LV SD SV(e)
X'814000'	CJBN	16	Character (variable length)	Job name	LD LV SD(e) SV(e)
X'815000'	CLIB	16	Character (variable length)	Current library name	AV CV DV
X'816000'	CLS	40	Character (variable length)	Security class description	LC LD LV SD(e) SV(e)
X'816900'	CMDD	9	Binary(8)	Command Authorization - based on DSN: 0=No 1=Yes	LC

Table 11. Command SFIs (continued)

SFI Number	SFI Name	SFI Length	SFI Data Type	Data Description	Subcommand
X'8169A0'	CMDO	9	Binary(8)	Command Authorization - based on owner: 0=No 1=Yes	LC
X'817000'	CNT	12	Binary(31)	Bin, rack, or volume count: Min 0, Max 5-digit	AB AR AV DB DR
X'817820'	CPGM	16	Character (fixed length)	Creating program name	LD SD(e)
X'818000'	CRP	12	Binary(31)	CATRETPD retention period: Min 0, Max 4-digit	LC
X'818800'	CSDT	12	Packed decimal Julian date	Catalog synchronize date	LC
X'819000'	CSG	16	Character (variable length)	Current storage group name	AV CV
X'819400'	CSTM	12	Packed decimal time date	Catalog synchronize time	LC
X'819600'	CSVE	9	Binary(8)	Stacked volume enable status: 0=None 1=Enabled 2=Disabled 3=Mixed	LC
X'819800'	CTLG	9	Binary(8)	Catalog status: 0=UNKNOWN 1=NO 2=YES	LD SD(e)
X'81A000'	CTM	12	Packed decimal time format	Create time	LD LV SD SV(e)
X'81A300'	CTNR	24	Character (variable length)	In container	LV STORE
X'81A600'	DBIN	14	Character (fixed length)	Numeric: 0–999999 or 6 alphanumeric character destination bin number	LV
X'81A700'	DBMN	16	Character (fixed length)	8 character destination bin media name	LV
X'81B000'	DBN	12	Binary(31)	Bin numbers in DISTANT location: Min 0, Max 6-digit	LC
X'81C000'	DC	16	Character (variable length)	Data class name	LD SD(e)
X'81D000'	DD	16	Character (variable length)	DD name	LD SD(e)
X'81E000'	DDTJ	12	Packed decimal Julian date format	Delete date or last store update date	LC LS SS
X'81F000'	DEN	9	Binary(8)	Media density: 0=UNDEFINED 1=1600 2=6250 3=3480 4=COMPACT	LV SV(e)

Table 11. Command SFIs (continued)

SFI Number	SFI Name	SFI Length	SFI Data Type	Data Description	Subcommand
X'820000'	DESC	38	Character (variable length)	Volume or VRS description	LS LV SS(e) SV(e)
X'821000'	DEST	16	Character (variable length)	Destination name	LV SV
X'822000'	DEV	12	Character (fixed length)	Device number	LD SD(e)
X'823000'	DLRJ	12	Packed decimal Julian date format	Date last read	LD LV SD(e) SV(e)
X'824000'	DLWJ	12	Packed decimal Julian date format	Date last written	LD LV SD(e) SV(e)
X'825000'	DNM	52	Character (variable length)	Data set name mask	LC
X'825E00'	DPCT	9	Binary(8)	Percent of volume	LD SD(e)
X'826000'	DPT	48	Character (variable length)	Owner's department	LO
X'827000'	DRP	12	Binary(31)	Default retention period: Min 0, Max 4-digit	LC
X'828000'	DSC	12	Binary(31)	Data set count: Min 0, Max 4-digit	LV SV
X'829000'	DSEQ	12	Binary(31)	Data set sequence: Min 0, Max 4-digit	LD SD(e)
X'82A000'	DSN	52	Character (variable length)	Data set name	LD LV SD SV(e)
X'82A500'	DSPD	16	Character (variable length)	Disposition DD name	LC
X'82AA00'	DSPM	16	Character (variable length)	Disposition message prefix	LC
X'82B000'	DSR	9	Binary(8)	Data set recording: 0=OFF 1=ON	LV SV
X'82B200'	DSTT	9	Binary(8)	Destination type 0=SHELF 1=STORE_BUILTIN_BINS 2=MANUAL 3=AUTO 4=STORE_BINS 5=STORE_NOBINS	LV
X'82C000'	DTE	9	Binary(8)	Installation date format: 1=A 2=E 3=I 4=J	LC
X'82D000'	DTM	12	Packed decimal time format	Last store update run time	LC
X'82D500'	EBIN	9	Binary(8)	Extended bin enable status 0=DISABLED 1=ENABLED	LC
X'82E000'	EMN	16	Character (variable length)	Owner's node	LO

Table 11. Command SFIs (continued)

SFI Number	SFI Name	SFI Length	SFI Data Type	Data Description	Subcommand
X'82F000'	EMU	16	Character (variable length)	Owner's user ID	LO
X'830000'	ETL	28	Character (variable length)	Telephone number	LO
X'831000'	FCD	12	Character (variable length)	Feature code	LP LV SP SV(e)
X'831800'	FCSP	9	Binary(8)	Catalog synchronize in progress: 0=NO 1=YES	LC
X'832000'	FDB	12	Binary(31)	Free bins in DISTANT location Min 0, Max 6-digit	LC
X'833000'	FILE	12	Binary(31)	Physical file sequence Min 1, Max 4-digit	LD SD
X'834000'	FLB	12	Binary(31)	Free bin numbers in LOCAL location: Min 0, Max 6-digit	LC
X'835000'	FOR	28	Character (variable length)	Owner's forename	LO
X'836000'	FRB	12	Binary(31)	Free bin numbers in REMOTE location: Min 0, Max 6-digit	LC
X'837000'	FRK	12	Binary(31)	Free rack numbers in library: Min 0, Max 10-digit	LC
X'838000'	GRK	14	Character (fixed length)	Generic rack number = reject prefix	LC
X'839000'	HLOC	16	Character (variable length)	Home location	LV SV
X'839200'	HLOT	9	Binary(8)	Home location type 0=SHELF 2=MANUAL 3=AUTO	LV
X'83A000'	INTR	9	Binary(8)	Volume intransit status: 0=NO 1=YES	LV SV
X'83B000'	IPL	9	Binary(8)	Date check required on IPL: 0=NO 1=YES	LC
X'83C000'	ITL	16	Character (variable length)	Telephone number	LO
X'83CA00'	JBDT	12	Packed decimal Julian date	Last Journal Backup Date	LC
X'83CB00'	JBTM	12	Packed decimal Julian date	Last Journal Backup Time	LC
X'83D000'	JDS	52	Character (variable length)	Journal name	LC

Table 11. Command SFIs (continued)

SFI Number	SFI Name	SFI Length	SFI Data Type	Data Description	Subcommand
X'83E000'	JRNF	10	Binary(15)	JOURNALFULL parmlib value: 0 - 99	LC
X'83EA00'	JRNS	9	Binary(8)	Journal status: 0=Disabled 1=Enabled 2=Locked	LC
X'83F000'	JRNU	10	Binary(15)	Journal percentage used: 0 - 100	LC
X'840000'	LBL	9	Bit(8)	Volume label type: '20'=NL '10'=AL '08'=SL '02'=BLP '01'=UL	LV SV
X'841000'	LBN	12	Binary(31)	Bin numbers in LOCAL location Min 0, Max 6-digit	LC
X'842000'	LCID	16	Last change user ID	Character (variable length)	LV SV(e)
X'843000'	LCT	10	Binary(15)	Default lines per page Min 10, Max 3-digit	LC
X'844000'	LDDF	9	Binary(8)	Location definition exists: 0=NO 1=YES	LC
X'843B00'	LDD	16	Character (fixed length)	Last used DD name	LD SD(e)
X'845000'	LDEV	16	Character (fixed length)	Last drive	LD SD(e) LV SV(e)
X'846000'	LDLC	16	Character (variable length)	Location name	LC
X'847000'	LDLT	9	Binary(8)	Location type: 0=SHELF 1=AUTO 2=MANUAL 3=STORE	LC
X'848000'	LDMN	16	Character (variable length)	Location media name	LC
X'849000'	LDMT	9	Binary(8)	Location management type: 0=UNDEFINED 1=BIN 2=NOBINS	LC
X'84A000'	LDPR	12	Binary(31)	Location priority: Min 0, Max 4-digit	LC
X'84B000'	LINE	264	Character (variable length)	Output data line	All list and search subcommands
X'84B420'	LJOB	16	Character (fixed length)	Last used job name	LD SD(e)
X'84C000'	LOAN	16	Character (fixed length)	Loan location	LV SV
X'84D000'	LOC	16	Character (fixed length)	Location	LB LR LS LV SB SR SS SV

Table 11. Command SFIs (continued)

SFI Number	SFI Name	SFI Length	SFI Data Type	Data Description	Subcommand
X'84E000'	LOCT	9	Binary(8)	Location type 0=SHELF 1=STORE_BUILTIN_BINS 2=MANUAL 3=AUTO 4=STORE_BINS 5=STORE_NOBINS 6=IN CONTAINER	LV SV(e)
X'84E760'	LPGM	16	Character (fixed length)	Last used program name	LD SD(e)
X'84F000'	LRCL	12	Binary(31)	Logical record length: Min 0, Max 5-digit	LD SD(e)
X'850000'	LRK	12	Binary(31)	Library rack numbers: Min 0, Max 10-digit	LC
X'850370'	LSTP	16	Character (variable length)	Last used step name	LD SD(e)
X'850500'	LVC	9	Binary(8)	Current label version: 0=No version specified 1=Label version 1 specified 3=Label version 3 specified 4=Label version 4 specified	LV SV
X'850A00'	LVN	9	Binary(8)	Required label version: 0=No version specified 3=Label version 3 specified 4=Label version 4 specified	LV SV
X'851000'	MC	16	Character (variable length)	Management class	LD SD(e)
X'852000'	MDS	52	Character (variable length)	Control data set name	LC
X'853000'	MDTJ	12	Packed decimal Julian date format	Control data set create date	LC
X'854000'	MEDA	9	Binary(8)	Media special attributes: 0=NONE 1=READCOMP	LV SV
X'855000'	MEDC	9	Binary(8)	Media compaction 0=UNDEFINED 1=NO 2=YES	LV SV
X'856000'	MEDN	16	Character (variable length)	Media name	CV LC LB LR LV SB SR SV
X'857000'	MEDR	9	Binary(8)	Recording technology: 0=Non-cartridge 1=18TRK 2=36TRK 3=128TRK 4=256TRK 5=384TRK	LV SV
X'858000'	MEDT	9	Binary(8)	Media type: 0=UNDEFINED 1=CST 2=ECCST 3=HPCT 4=EHPCT	LV SV
X'859000'	MFR	16	Character (variable length)	Source location name	LC

Table 11. Command SFIs (continued)

SFI Number	SFI Name	SFI Length	SFI Data Type	Data Description	Subcommand
X'85A000'	MID	20	Character (variable length)	Mount message ID	LC
X'85A500'	MIV	14	Character (fixed length)	Moving-in volume	LB SB
X'85A900'	MOV	14	Character (fixed length)	Moving-out volume	LB SB
X'85B000'	MOVM	9	Binary(8)	Move mode: 0=AUTO 1=MANUAL	LV SV(e)
X'85C000'	MOP	9	Binary(8)	Master overwrite: 1=ADD 2=LAST 3=MATCH 4=USER	LC
X'85D000'	MRP	12	Binary(31)	Maximum retention period: Min 0, Max 4-digit -1 (negative) means unlimited retention.	LC
X'85E000'	MSGF	9	Binary(8)	Message text case: 0=MIXED 1=UPPER	LC
X'85F000'	MST	9	Binary(8)	Move status: 0=UNKNOWN 1=PENDING 2=CONFIRMED 3=COMPLETE	LC
X'860000'	MTM	12	Packed decimal time format	Control data set create time	LC
X'861000'	MTO	16	Character (variable length)	Target location name, installation defined name, SHELF, or SMS library name	LC
X'862000'	MTP	9	Binary(8)	Control data set type: 0=MASTER	LC
X'862800'	MTY	9	Binary(8)	Move type: 0=NOTRTS 1=RTS	LC
X'862B00'	MVBY	9	Binary(8)	Move by: 0=VOLUME 1=SET	LC
X'863000'	MVS	9	Binary(8)	MVS use 0=NO 1=YES	LV SV(e)
X'865000'	NLOC	16	Character (variable length)	Required location	LV SV(e)
X'865200'	NLOT	9	Binary(8)	Required location type 0=SHELF 1=STORE_BUILTIN_BINS 2=MANUAL 3=AUTO 4=STORE_BINS 5=STORE_NOBINS	LV
X'866000'	NME	16	Character (variable length)	Security class name	LC LD LV SD(e) SV(e)
X'866800'	NOT	9	Binary(8)	User notification: 0=NO 1=YES	LC

Table 11. Command SFIs (continued)

SFI Number	SFI Name	SFI Length	SFI Data Type	Data Description	Subcommand
X'867000'	NVL	14	Character (fixed length)	Next volume serial	LV SV(e)
X'868000'	NVRS	16	Character (variable length)	Next VRS name	LS SS
X'869000'	OAC	9	Binary(8)	Owner access 0=READ 1=UPDATE 2=ALTER	LV SV(e)
X'86A000'	OBMN	16	Character (variable length)	Old bin number media name	LV SV(e)
X'86B000'	OBN	14	Character (fixed length)	Old bin number	LV SV(e)
X'86B800'	OCE	9	Binary(8)	Volume information recorded at O/C/EOV 0=NO 1=YES	LV SV(e)
X'86C000'	OLOC	16	Character (variable length)	Old location	LV SV(e)
X'86C200'	OLOT	9	Binary(8)	Old location type 0=SHELF 1=STORE_BUILTIN_BINS 2=MANUAL 3=AUTO 4=STORE_BINS 5=STORE_NOBINS 6=IN_CONTAINER	LV
X'86D000'	OPL	10	Binary(15)	Position of rack number or pool ID Min 1, Max 3-digit	LC Position in the message.
X'86E000'	OPM	9	Binary(8)	Operating mode 1=M 2=R 3=W 4=P	LC
X'86F000'	OVL	10	Binary(15)	Position of volume serial number: Min 1, Max 3-digit	LC Position in the message.
X'86F500'	OVOL	14	Character (fixed length)	Old volume	LB SB
X'870000'	OWN	16	Character (variable length)	Owner	GV LD LO LP LS LV SD(e) SP SS SV
X'871000'	OXDJ	12	Packed decimal Julian date format	Original expiration date	LV SV(e)
X'871800'	PACS	9	Binary(8)	PREACS 0=NO 1=YES	LC
X'871E00'	PDA	9	Binary(8)	PDA state: 0=Off 1=On 2=None	LC
X'871E10'	PDAC	9	Binary(8)	PDA block count: Numeric 2-255	LC
X'871E30'	PDAL	9	Binary(8)	PDA log state: 0=Off 1=On	LC

Table 11. Command SFIs (continued)

SFI Number	SFI Name	SFI Length	SFI Data Type	Data Description	Subcommand
X'871E90'	PDAS	9	Binary(8)	PDA block size: Numeric 1-31	LC
X'872000'	PDS	48	Character (variable length)	Pool description	LC
X'873000'	PDSC	40	Character (variable length)	Product description	LP SP(e)
X'874000'	PEND	9	Bit(8)	Actions pending: '80'=SCRATCH '40'=REPLACE '20'=INIT '10'=ERASE '08'=RETURN '04'=NOTIFY	LV SV
X'875000'	PID	14	Character (variable length)	Pool prefix	LC LR SR
X'876000'	PLN	16	Character (variable length)	Pool name	LC
X'877000'	PNME	38	Character (variable length)	Software product name	LP SP
X'878000'	PNUM	16	Character (variable length)	Software product number	LP LV SP SV(e)
X'879000'	PRD	12	Binary(31)	Permanent read errors: Min 0, Max 5-digit	LV SV(e)
X'87A000'	PRF	9	Binary(8)	Pool definition RACF® (A component of the Security Server for z/OS) option: 0=NO 1=YES	LC
X'87B000'	PRTY	12	Binary(31)	Priority: Min 0, Max 4-digit	LS SS
X'87C000'	PSFX	10	Character (fixed length)	Parmlib member suffix	LC
X'87D000'	PSN	16	Character (variable length)	Pool definition system ID	LC
X'87E000'	PTP	9	Binary(8)	Pool definition pool type: 0=SCRATCH 1=RACK	LC
X'87F000'	PVL	14	Character (fixed length)	Previous volume: 1 - 6 character	LV SV(e)
X'880000'	PWT	12	Binary(31)	Permanent write errors: Min 0, Max 5-digit	LV SV(e)
X'881000'	RBN	12	Binary(31)	Number of bin numbers in REMOTE location: Min 0, Max 6-digit	LC
X'881200'	RBYS	9	Binary(8)	Retain by set: 0=No 1=Yes	LV SV(e)
X'882000'	RCF	9	Binary(8)	Installation RACF support: 1=N 2=P 3=A	LC

Table 11. Command SFIs (continued)

SFI Number	SFI Name	SFI Length	SFI Data Type	Data Description	Subcommand
X'883000'	RCFM	12	Character (variable length)	RECFM	LD SD(e)
X'884000'	RCK	14	Character (fixed length)	Rack or bin number	AB AR AV CV DB DR LB LP LR LV SB SP(e) SR SV
X'886000'	RDTJ	12	Packed decimal Julian date format	Last control data set extract date	LC
X'888000'	RET	11	Binary(8)	Retention type 1st byte: 1=RETAIN_WHILE_CATALOGED 2nd byte: 1=RETAIN_UNTIL_EXPIRED 3rd byte: 1=CYCLES 2=DAYS 3=REFDAYS 4=VOLUMES 5=EXTRA DAYS 6=BY DAYS CYCLE	LS SS
X'88A000'	RST	9	Binary(8)	Rack or bin status 0=EMPTY 1=FREE 2=INUSE	LB LR SB SR
X'88B900'	RTBY	9	Binary(8)	Retain by: 0=VOLUME 1=SET	LC
X'88C000'	RTDJ	12	Packed decimal Julian date format	Retention date	LD LV SD(e) SV
X'88E000'	RTM	12	Packed decimal time format	Last control data set extract time	LC
X'88E500'	RUB	9	Binary(8)	Reuse bin at 0=CONFIRMMOVE 1=STARTMOVE	LC
X'890000'	SC	16	Character (variable length)	Storage class name	LD SD(e)
X'892000'	SCST	9	Bit(8)	Security class status '80'=SMF '40'=MSGOPT '20'=ERASE	LC
X'894000'	SC1	12	Binary(31)	Storenumbr Min 1, Max 5-digit	LS SS(e)
X'895000'	SDTJ	12	Packed decimal Julian date format	Movement tracking date	LV SV(e)
X'896000'	SEC	9	Binary(8)	Security class number Min 0, Max 255	LC
X'898000'	SEQ	12	Binary(31)	Volume sequence Min 1, Max 4-digit	LV
X'89A000'	SG	16	Character (variable length)	Storage group name	LD LV SD(e) SV(e)
X'89B000'	SID	16	Character (variable length)	DFSMSrmm system ID	LC
X'89C000'	SLM	10	Binary(15)	MAXHOLD value Min 10, Max 500	LC

Table 11. Command SFIs (continued)

SFI Number	SFI Name	SFI Length	SFI Data Type	Data Description	Subcommand
X'89E000'	SMI'	10	Binary(15)	Offset to message ID Min 0, Max 3-digit	LC
X'89E210'	SMP	9	Binary(8)	System-managed tape purge: 0=NO 1=YES 2=ASIS	LC
X'89E220'	SMU	9	Bit(8)	System-managed tape update: 20=Command 40=Scratch 80=Exits N/A	LC
X'89F000'	SOSJ	12	Packed decimal Julian date format	Last expiration processing start date	LC
X'8A0000'	SOSP	16	Character (variable length)	Scratch procedure name	LC
X'8A1000'	SOST	12	Packed decimal time format	Last expiration processing start time	LC
X'8A2000'	SSM	10	Binary(15)	SMF security record number 128-155 = record number	LC
X'8A3000'	STEP	16	Character (variable length)	Step name	LD SD(e)
X'8A3800'	STVC	12	Binary(31)	Count of volumes stacked on a stacked volume	LV VOL SV(e)
X'8A4000'	SUR	28	Character (variable length)	Surname	LO
X'8A5000'	SYS	16	Character (variable length)	SMF System ID	LD SD(e)
X'8A6000'	TAC	9	Binary(8)	Reject type 0=ANYUSE 1=OUTPUT	LC
X'8A7000'	TRD	12	Binary(31)	Temporary read errors Min 0, Max 5-digit	LV SV(e)
X'8A7900'	TVXP	9	Binary(8)	Extradays retention: 0=RELEASE 1=EXPIRE 2=NONE	LC
X'8A8000'	TWT	12	Binary(31)	Temporary write errors: Min 0, Max 5-digit	LV SV(e)
X'8A9000'	TYP	9	Bit(8)	VRS type: '80'=GDG '40'=PSEUDGDG '20'=DSNAME '10'=VOLUME '08'=NAME	LS SS(e)
X'8AB001'	UID	16	Character (variable length)	User ID ID is incremented by one for each SFI	LV SV(e)
X'8AC000'	UNC	9	Binary(8)	Uncatalog option: 0=N 1=Y 2=S	LC

Table 11. Command SFIs (continued)

SFI Number	SFI Name	SFI Length	SFI Data Type	Data Description	Subcommand
X'8AD000'	USEC	12	Binary(31)	Volume use count: Min 0, Max 5-digit	LV SV(e)
X'8AE000'	USEM	12	Binary(31)	Volume usage (KB): Min 0, Max 10-digit	LV SV(e)
X'8AF001'	VAC	9	Binary(8)	Volume access: 0=NONE 1=READ 2=UPDATE	LV SV(e)
X'8B0000'	VACT	9	Binary(8)	VRSMIN action: 0=FAIL 1=INFO 2=WARN	LC
X'8B0800'	VANX	9'	Binary(8)	Next VRS type: 0=Undefined 1=Next 2=And	LS SS
X'8B0B00'	VCAP	12	Binary(31)	Volume capacity	LV SV(e)
X'8B1000'	VCHG	9	Binary(8)	VRSCCHANGE value: 0=INFO 1=VERIFY	LC
X'8B2000'	VDD	10	Binary(15)	VRS delay days: Min 0, Max 99	LS SS(e)
X'8B3000'	VDTJ	12	Packed decimal time format	Last inventory management processing date	LC
X'8B4000'	VER	14	Character (variable length)	Software produce version, release, modification vvrmm	LP LV SP SV(e)
X'8B5000'	VJBN	16	Character (variable length)	Primary VRS job name	LD LS SD(e) SS
X'8B6000'	VLN	12	Binary(31)	Number of volumes: Min 0, Max 3-digit	LO LP SP
X'8B7000'	VM	9	Binary(31)	VM use: 0=NO 1=YES	LV SV(e)
X'8B8000'	VMIN	12	Binary(31)	VRSMIN count value: Min 0, Max 6-digit	LC
X'8B9000'	VMV	16	Character (variable length)	VRS management value	LD SD(e)
X'8BA000'	VNME	52	Character (variable length)	Primary VRS name	LD SD(e)
X'8BC000'	VOL	14	Character (fixed length)	1 - 6 characters volume serial	AV CV GV LB LD LP LR LV SB SD SP SR SV
X'8BC200'	VOLT	9	Binary(8)	Volume type: 0=physical volume 1=logical volume 2=stacked	LV VOL
X'8BCD00'	VOL1	14	Character (fixed length)	VOL1 label volume serial number	LV SV(e)
X'8BC300'	VPCT	9	Binary(8)	Volume percent full	LV SV(e)
X'8BD000'	VRC	12	Binary(31)	Vital record count: Min 1, Max 5-digit	LS SS(e)
X'8BE000'	VRJ	9	Binary(8)	VRS job name: 1 or 2	LC

Table 11. Command SFIs (continued)

SFI Number	SFI Name	SFI Length	SFI Data Type	Data Description	Subcommand
X'8BF000'	VRS	52	Character (variable length)	Vital record specification name	LS SS
X'8BF500'	VRSI	9	Binary(8)	Release action scratch immediate: 0=NO 1=YES	LS LV SS SV(e)
X'8BFA00'	VRSL	9	Binary(8)	VRSEL value: 0=OLD, 1=NEW	LC
X'8C0000'	VRSR	9	Binary(8)	VRS retained status: 0=NO 1=YES	LD SD(e)
X'8C0800'	VRXI	9	Binary(8)	Expiration date ignore: 0=NO 1=YES	LV LS SS SV(e)
X'8C1000'	VSCD	12	Packed decimal Julian date format	Primary VRS subchain start date	LD SD(e)
X'8C1800'	VSCN	16	Character (variable length)	Primary VRS subchain name	LD SD(e)
X'8C2000'	VST	9	Bit(8)	Volume status: '80'=MASTER '40'=SCRATCH '20'=USER '10'=INIT '08'=ENTRY	LV SV
X'8C3000'	VTM	12	Packed decimal time format	Last inventory management VRS time	LC
X'8C4000'	VTYP	9	Binary(8)	Matching VRS type: 0=UNDEFINED 1=DATASET 2=SMSMC 3=VRSMV 4=DSNMV 5=DSNMC	LD SD(e)
X'8C5000'	XDC	9	Binary(8)	Expiration date check: 0=NO 1=YES 2=OPERATOR	LC
X'8C6000'	XDTJ	12	Packed decimal Julian date format	Expiration date	LC LV SV
X'8C7000'	XTM	12	Packed decimal time format	Last inventory management expiration time	LC
X'8C7800'	X100	9	Binary(8)	EDGUX100 installation exit status: 0=No exit 1=Enabled 2=Disabled	LC
X'8C7801'	X200	9	Binary(8)	EDGUX200 installation exit status: 0=No exit 1=Enabled 2=Disabled	LC
X'8C8000'	2JBN	16	Character (variable length)	Secondary VRS jobname mask	LD SD(e)
X'8C9000'	2NME	16	Character (variable length)	Secondary VRS mask	LD SD(e)

Table 11. Command SFIs (continued)

SFI Number	SFI Name	SFI Length	SFI Data Type	Data Description	Subcommand
X'8CA000'	2SCD	12	Packed decimal Julian date format	Secondary VRS subchain start date	LD SD(e)
X'8CB000'	2SCN	16	Character (variable length)	Secondary VRS subchain name	LD SD(e)

Appendix B. Structured Field Introducers by Subcommand

Table 12 lists the structured field introducers by DFSMSrmm TSO subcommand.

The RMM SEARCHDATASET, RMM SEARCHPRODUCT, RMM SEARCHVOLUME, and RMM SEARCHVRS subcommands return different sets of SFIs depending on if you specify the EDGXCI macro EXPAND=YES or EXPAND=NO parameter. When you specify the EXPAND=YES parameter, these subcommands return the same information as their corresponding RMM LIST subcommands: RMM LISTDATASET, RMM LISTPRODUCT, RMM LISTVOLUME, and RMM LISTVRS.

Table 12. Structured Field Introducers by Subcommand

Subcommand	Structured Field Introducers
ADDBIN	CNT ENTN MSGL MSGN RCK RSNC RTNC SVCN
ADDDATASET	ENTN MSGL MSGN RSNC RTNC SVCN
ADDDOWNER	ENTN MSGL MSGN RSNC RTNC SVCN
ADDPRODUCT	ENTN MSGL MSGN RSNC RTNC SVCN
ADDRACK	CNT ENTN MSGL MSGN RCK RSNC RTNC SVCN
ADDVOLUME	CLIB CNT CSG ENTN FRC FRS MSGL MSGN RCK RSNC RTNC SVCN VOL
ADDVRS	ENTN MSGL MSGN RSNC RTNC SVCN
CHANGEDATASET	ENTN MSGL MSGN RSNC RTNC SVCN
CHANGEOWNER	ENTN MSGL MSGN RSNC RTNC SVCN
CHANGEPRODUCT	ENTN MSGL MSGN RSNC RTNC SVCN
CHANGEVOLUME	CLIB CSG ENTN FRC FRS MEDN MSGL MSGN RCK RSNC RTNC SVCN
DELETEBIN	CNT ENTN MSGL MSGN RCK RSNC RTNC SVCN
DELETEDATASET	ENTN MSGL MSGN RSNC RTNC SVCN
DELETEOWNER	ENTN MSGL MSGN RSNC RTNC SVCN
DELETEPRODUCT	ENTN MSGL MSGN RSNC RTNC SVCN
DELETERACK	CNT ENTN MSGL MSGN RCK RSNC RTNC SVCN
DELETEVOLUME	CLIB ENTN FRC FRS MSGL MSGN RSNC RTNC SVCN
DELETEVRS	ENTN MSGL MSGN RSNC RTNC SVCN
GETVOLUME	ENTN FRC FRS MSGL MSGN OWN RSNC RTNC SVCN VOL
LISTBIN	ENTN LINE LOC MIV MOV MEDN MSGL MSGN OVOL RCK RSNC RST RTNC SVCN VOL
LISTCONTROL	ACCT ACS ACT AST AUD BDTJ BKPP BLP BTM CACT CATS CDS CDSU CLS CMDD CMDO CRP CSDT CSTM CSVE DBN DDTJ DNM DRP DSPD DSPM DTE DTM EBIN ENTN FCSP FDB FLB FRB FRK GRK IPL JBDT JBTM JDS JRNJ JRNS JRNU LBN LCT LDDF LDLC LDLT LDMN LDMT LDPR LINE LOCT LRK MDS MDTJ MEDN MFR MID MOP MRP MSGF MSGL MSGN MST MTM MTO MTP MTY MVBY NME NOT OPL OPM OVL PACS PDA PDAC PDAL PDAS PDS PID PLN PRF PSFX PSN PTP RBN RCF RDTJ RSNC RTBY RTM RTNC RUB SCST SEC SID SLM SMI SMP SMU SOSJ SOSP SOST SSM SVCN TAC TVXP UNC VACT VCHG VDTJ VMV VRJ VRSL VTM V1 XDC XDTJ XTM X100 X200

Table 12. Structured Field Introducers by Subcommand (continued)

Subcommand	Structured Field Introducers
LISTDATASET	ABND BLKC BLKS BLKT CDTJ CJBN CLS CPGM CTLG CTM DC DD DEV DLRJ DLWJDPCT DSEQ DSN ENTN FILE LINE LPGM LRCL MC MSGL MSGN NME OWN RCFM RSNC RTDJ RTNC SC SG STEP SVCN SYS VJBN VNME VOL VRSR VSCD VSCN VTYP 2JBN 2NME 2SCD 2SCN
LISTOWNER	ADL DPT EMN EMU ENTN ETL FOR ITL LINE MSGL MSGN OWN RSNC RTNC SUR SVCN VLN
LISTPRODUCT	ENTN FCD LINE MSGL MSGN OWN PDSC PNME PNUM RCK RSNC RTNC SVCN VER VLN VOL
LISTRACK	ENTN LINE LOC MEDN MSGL MSGN PID RCK RSNC RST RTNC SVCN VOL
LISTVOLUME	ACN ACT ADTJ ATM AVL BIN BMN CDTJ CJBN CLS CTM CTNR DBIN DBMN DEN DESC DEST DLRJ DLWJ DSC DSN DSR DSTT ENTN FCD HLOC HLOT INTR LBL LCID LDEV LINE LOAN LOC LOCT LVC LVN MEDA MEDC MEDN MEDR MEDT MOVMSGL MSGN MVS NLOC NLOT NME NVL OAC OBMN OBN OCE OLOC OLOT OWN OXDJ PEND PNUM PRD PVL PWT RBYS RCK RSNC RTDJ RTNC SDTJ SEQ SG STVC SVCN TRD TWT UID USEC USEM VAC VCAP VER VM VMIN VOL VOLT VOL1 VPCT VRSI VRXI VST XDTJ
LISTVRS	DESC DDTJ ENTN LINE LOC MSGL MSGN NVRS OWN PRTY RET RSNC RTNC SC1 SVCN TYP VANX VDD VJBN VRC VRS VRSI VRXI
SEARCHBIN	ENTN LINE LOC MEDN MIV MOV MSGL MSGN OVOL RCK RSNC RST RTNC SVCN VOL
SEARCHDATASET	CDTJ CTM DSN ENTN FILE KEYF KEYT LINE MSGL MSGN OWN RSNC RTNC SVCN VOL
SEARCHDATASET(EXPAND=YES)	The same SFIs as the LISTDATASET subcommand.
SEARCHPRODUCT	ENTN FCD LINE MSGL MSGN OWN PNME PNUM RSNC RTNC SVCN VER VLN VOL
SEARCHPRODUCT(EXPAND=YES)	The same SFIs as the LISTPRODUCT subcommand.
SEARCHRACK	ENTN LINE LOC MEDN MSGL MSGN PID RCK RSNC RST RTNC SVCN VOL
SEARCHVOLUME	ADTJ AVL DESC DEST DSC DSR ENTN HLOC INTR KEYF KEYT LBL LINE LOAN LOC LVC LVN MEDA MEDC MEDN MEDR MEDT MSGL MSGN OWN PEND RCK RSNC RTDJ RTNC SVCN TYPF TYPT VOL VOL1 VST XDTJ
SEARCHVOLUME(EXPAND=YES)	The same SFIs as the LISTVOLUME subcommand.
SEARCHVRS	DDTJ ENTN LINE LOC MSGL MSGN NVRS OWN PRTY RET RSNC RTNC SVCN VANX VJBN VRS VRSI VRXI
SEARCHVRS(EXPAND=YES)	The same SFIs as the LISTVRS subcommand.

Appendix C. DFSMSrmm Application Programming Interface Mapping Macros

DFSMSrmm API macros can be used to generate mappings: This section discusses:

- The parameter list generated by the list form of the EDGXCI macro as shown in Figure 43 “EDGXCI: Parameter List”
- The structured field definitions generated by the EDGXSF macro as shown in “EDGXSF: Structured Field Definitions” on page 74

EDGXCI: Parameter List

The mapping of the parameter list, which is generated by the list form of the EDGXCI macro, is a Product-sensitive Programming Interface.

The EDGXCI mapping macro is provided for information only. Although the fields and values of the parameter list are shown here, your application program should not directly access and modify the parameter list. Always use macro EDGXCI.

```
MYPL    DS    0D                ++ EDGXCI PARM LIST
MYPL_XVERSION DS XL1           ++ INPUT XVERSION
MYPL_XOPERATION DS XL1         ++ XOPERATION
MYPL_XOPERATION_BEGIN EQU 0    ++ XOPERATION.BEGIN KEYWORD
MYPL_XOPERATION_CONTINUE EQU 1 ++ XOPERATION.CONTINUE KEYWORD
MYPL_XOPERATION_RELEASE EQU 2  ++ XOPERATION.RELEASE KEYWORD
MYPL_XOPERATION_ENDALL EQU 3   ++ XOPERATION.ENDALL KEYWORD
MYPL_XOUTPUT DS XL1           ++ XOUTPUT
MYPL_XOUTPUT_LINES EQU 0       ++ XOUTPUT.LINES KEYWORD
MYPL_XOUTPUT_FIELDS EQU 1      ++ XOUTPUT.FIELDS KEYWORD
MYPL_XEXPAND DS XL1           ++ XEXPAND
MYPL_XEXPAND_YES EQU 0         ++ XEXPAND.YES KEYWORD
MYPL_XEXPAND_NO EQU 1         ++ XEXPAND.NO KEYWORD
MYPL_XAPIADDR DS A             ++ XAPIADDR
MYPL_XOUTBUFADDR DS A         ++ XOUTBUFADDR
MYPL_XSUBCMDADDR DS A         ++ XSUBCMDADDR
MYPL_XTOKEN DS CL4            ++ XTOKEN
MYPL_XRSV0001 DS CL8          ++ RESERVED XRSV0001
MYPL_XRSV0002 DS CL4          ++ RESERVED XRSV0002
MYPL_XRSV0003 DS CL8          ++ RESERVED XRSV0003
MYPLL    EQU    *-MYPL        ++ LENGTH OF PLIST
```

Figure 43. Mapping of the Parameter List Using the List Form of EDGXCI

EDGXSF: Structured Field Definitions

Use macro EDGXSF in your application program to define the data that the DFSMSrmm API returns in your output buffer. This section includes:

- “EDGXSF Parameters”
- “EDGXSF Mapping” on page 75
- “EDGXSF Labeling Conventions” on page 75

EDGXSF Parameters

The EDGXSF parameters are:

DSECT=YES

DSECT=NO

An optional parameter that specifies whether a DSECT statement is generated. The default is DSECT=YES.

DSECT=YES

Indicates that a DSECT statement should be generated.

DSECT=NO

Indicates that a DSECT statement should not be generated.

,LIST=YES

,LIST=NO

An optional parameter that specifies whether the macro expansion is printed. The default is LIST=YES.

,LIST=YES

Indicates to print the expansion.

,LIST=NO

Indicates do not print the expansion.

,TITLE=YES

,TITLE=NO

An optional parameter that specifies whether the macro title is printed. The default is TITLE=YES.

,TITLE=YES

Indicates to print the title.

,TITLE=NO

Indicates do not print the title

EDGXSf Mapping

Always use macro EDGXSf to determine the exact labels used to define the DFSMSrmm SFIs. Figure 44 shows the dummy control section and the data types that define the generic mapping for the SFIs defined in Appendix A, “Structured Field Introducers”, on page 53.

```

EDGXSf
*
* *****
* *   Output Buffer
* *****
*
XSF_OUTBUF          DSECT   Output Buffer
XSF_OUTBUF_BUFLNG  DS       1FL4   Buffer Length
XSF_OUTBUF_RQDLNG  DS       1FL4   Required Buffer Length
XSF_OUTBUF_DATALNG DS       1FL4   Length of Output Data
XSF_OUTBUF_FIELDS  DS       0C     Start of Structured Fields
*
* *****
* *   Structured Field Introducers for Structured Fields
* *****
*
XSF_SFI             DSECT           Structured Field Introducers
XSF_SFI_LENGTH      DS   1FL2       Length
XSF_SFI_ID          DS   1CL0003    ID (identifier)
                                ORG   XSF_SFI_ID
XSF_SFI_IDVAL       DS   1CL0002    ID (Identifier Value)
XSF_SFI_IDQUAL      DS   1CL0001    ID (Identifier Qualifier)
XSF_SFI_TYPE        DS   1FL1       Type
                                DS   1CL0001   Reserved
XSF_SFI_DTYPE       DS   1FL1       Data type
XSF_SFI_LEN         EQU   *-XSF_SFI
XSF_SFI_DATA        DS   0C         Start of Data
*
* *****
* *   Data Types (XSF_SFI_DTYPE)
* *****
*
XSF_SFI_DTYPE_UNDEF EQU   X'00'   Undefined data
XSF_SFI_DTYPE_CHAR_FIX EQU  X'01'   n-byte character
XSF_SFI_DTYPE_BITFLAG EQU  X'02'   1-byte bit flag byte (8 bits)
XSF_SFI_DTYPE_BIN8   EQU  X'03'   1-byte (hex) value
XSF_SFI_DTYPE_BIN15  EQU  X'04'   2-byte hex value
XSF_SFI_DTYPE_BIN31  EQU  X'05'   4-byte hex value
XSF_SFI_DTYPE_CHAR_VAR EQU  X'07'   Variable length character
XSF_SFI_DTYPE_JDATE  EQU  X'09'   4-byte packed decimal date yyyydddC
XSF_SFI_DTYPE_TIME   EQU  X'0A'   4-byte packed decimal time hhmmssC
*

```

Figure 44. Mapping: Output Buffer and Structured Field Introducers

EDGXSf Labeling Conventions

This section includes the labeling conventions used in macro EDGXSf. The conventions are provided to assist you until such time as you are able to obtain macro EDGXSf.

Labeling: Begin and End Resource Groups

Resource groups, except for VOL and VRS, are defined using the following format:

- XSF_SFI_ID_xxxx and XSF_xxxx_LENGTH
- XSF_SFI_ID_Exxxx and XSF_Exxxx_LENGTH

Figure 45 shows the ACCESS resource group.

```
* *****  
* **   Begin and End ACCESS                               **  
* *****  
XSF_SFI_ID_ACCESS EQU X'021000'  
XSF_ACCESS_LENGTH EQU X'0008'  
*  
XSF_SFI_ID_EACCESS EQU X'021080'  
XSF_EACCESS_LENGTH EQU X'0008'
```

Figure 45. Mapping of the Begin and End ACCESS Group

The VOL and VRS groups are defined using the following format:

- XSF_SFI_ID_xxx and XSF_xxxGRP_LENGTH
- XSF_SFI_ID_Exxx and XSF_ExxxGRP_LENGTH

Figure 46 shows an example of the VOL resource group.

```
* *****  
* **   Begin and End VOL                                 **  
* *****  
XSF_SFI_ID_VOL     EQU X'036000'  
XSF_VOLGRP_LENGTH EQU X'0008'  
  
XSF_SFI_ID_EVOL    EQU X'036080'  
XSF_EVOLGRP_LENGTH EQU X'0008'
```

Figure 46. Mapping of the Begin and End VOL Group

Labeling: SFIs that Introduce Data

SFIs introduce data and are defined using the following format:

- XSF_SFI_xxxx_ID
- XSF_xxxx_LENGTH
- XSF_xxxx_DTYPE

Figure 47 shows an example of the ATM SFI.

```
* *****  
XSF_SFI_ATM_ID EQU X'806000' Assigned Time  
XSF_ATM_LENGTH EQU X'000C'  
XSF_ATM_DTYPE  EQU X'0A'  
* *****
```

Figure 47. Mapping of the ATM SFI

Labeling: Flags

Output data for some SFIs are defined as bit flags using the following format:

XSF_xxxx_FLAG_name.

Figure 48 on page 77 shows an example of the ACT SFI.

```

* *****
XSF_SFI_ACT_ID EQU X'802000' Actions on Release
XSF_ACT_LENGTH EQU X'0009'
XSF_ACT_DTYPE EQU X'02'
*
XSF_ACT_FLAG_SCRATCH EQU X'80'
XSF_ACT_FLAG_REPLACE EQU X'40'
XSF_ACT_FLAG_INIT EQU X'20'
XSF_ACT_FLAG_ERASE EQU X'10'
XSF_ACT_FLAG_RETURN EQU X'08'
XSF_ACT_FLAG_NOTIFY EQU X'04'
* *****

```

Figure 48. Mapping of the ACT SFI

Labeling: Bin(8) Data

Output data for some SFIs are defined as one-byte binary numbers using the following format: XSF_xxxx_DATA_name.

Figure 49 shows an example of the LOCT SFI.

```

* *****
XSF_SFI_LOCT_ID EQU X'84E000' Location Type
XSF_LOCT_LENGTH EQU X'0009'
XSF_LOCT_DTYPE EQU X'03'
*
XSF_LOCT_DATA_SHELF EQU X'00'
XSF_LOCT_DATA_STORE_BUILTIN_BINS EQU X'01'
XSF_LOCT_DATA_MANUAL EQU X'02'
XSF_LOCT_DATA_AUTO EQU X'03'
XSF_LOCT_DATA_STORE_BINS EQU X'04'
XSF_LOCT_DATA_STORE_NOBINS EQU X'05'
* *****

```

Figure 49. Mapping of the LOCT SFI

Unlabeled Data

The following output data types are unlabeled:

- Fixed-length and variable-length character data
- Two-byte binary values
- Four-byte binary values
- Dates
- Times

Appendix D. Hexadecimal Example of an Output Buffer

This appendix provides an example and discussion of a hexadecimal representation of the contents of an output buffer for a SEARCHDATASET subcommand request. You can modify this example for use in your installation.

Hexadecimal Representation of an Output Buffer

Figure 50 is a hexadecimal representation of the contents in an output buffer that might be produced for the SEARCHDATASET VOLUME(VOL001) subcommand shown in “Requesting Standard Output” on page 29. The following format is used:

- Relative buffer address shown as 2-byte values.
- Buffer contents are shown in groups of 8-bytes.

```
0000 0000100000000000 0000007100080260 00000000001B82A0 00000007D6E6D5C5
0020 D9D6D5C54BC6C9C5 D3C44BE3C5E2E300 0E8BC000000001E5 D6D3F0F0F1001087
0040 0000000007D6E6D5 C5D9D6D5C5000C81 3000000009199711 7C000C81A0000000
0060 0A0815270C000C83 3000000005000000 0100080260800000 0000000000000000
0080 0000000000000000 0000000000000000 0000000000000000 0000000000000000

0FFC 0000000000000000 0000000000000000 0000000000000000 0000000000000000
0FFE 0000000000000000 0000000000000000 0000000000000000 0000000000000000
```

Figure 50. Hexadecimal Representation of the Contents of an Output Buffer

Description of the Contents of an Output Buffer

The first line of the output buffer shown in Figure 50 shows:

```
0000 0000100000000000 0000007100080260 00000000001B82A0 00000007D6E6D5C5
```

- Three 4-byte length fields:

```
00001000
```

This is the length you specified for the output buffer.

```
00000000
```

This means that the output buffer is large enough. When the buffer length is too small, DFSMSrmm sets this field with the size of the buffer needed.

DFSMSrmm also returns return code 108 and reason code 10.

```
00000071
```

This is the total size of the data in the output buffer, including the length of this field. You can use this data length to determine when there is no more data to process.

- Eight structured fields:

```
0008026000000000
```

This is the Begin DATASET group SFI, which begins at offset x'000C' into the output buffer. Use this SFI to confirm that you are processing a DATASET SFI. When you do not want to process a group of structured fields, scan to the end of the group by looking for the corresponding End SFI, such as, the End DATASET group SFI in this example.

The first and second lines of the output buffer shown in Figure 50 on page 79 show:

```
0000 0000100000000000 0000007100080260 00000000001B82A0 00000007D6E6D5C5
0020 D9D6D5C54BC6C9C5 D3C44BE3C5E2E300 0E8BC000000001E5 D6D3F0F0F1001087
```

- Data Set Name structured field

```
001B82A000000007 D6E6D5C5D9D6D5C54BC6C9C5D3C44BE3C5E2E3
```

This is the Data Set Name structured field, which begins at offset x'0014' into the output buffer. The structured field consists of the 8-byte DSN SFI and, in this example, the 19-byte data set name (OWNERONE.FIELD.TEST). The length of the structured field is 27 bytes (8 plus 19) as shown by the x'001B' value at the beginning of the field.

- Volume Serial structured field

```
000E8BC000000001 E5D6D3F0F0F1
```

This is the Volume Serial structured field, which begins at offset x'002F' into the output buffer. The structured field consists of the 8-byte VOL SFI and the 6-byte volume serial (VOL001).

The second and third lines of the output buffer shown in Figure 50 on page 79 show:

```
0020 D9D6D5C54BC6C9C5 D3C44BE3C5E2E300 0E8BC000000001E5 D6D3F0F0F1001087
0040 0000000007D6E6D5 C5D9D6D5C5000C81 3000000009199711 7C000C81A0000000
```

- Owner structured field

```
0010870000000007 D6E6D5C5D9D6D5C5
```

This is the Owner structured field, which begins at offset x'003D' into the output buffer. The structured field consists of the 8-byte OWN SFI and the 8-byte owner (OWNERONE).

- Create Date structured field

```
000C813000000009 1997117C
```

This is the Create Date structured field, which begins at offset x'004D' into the output buffer. The structured field consists of the 8-byte CDTJ SFI and the 4-byte packed-decimal date (x'1997117C').

The third and fourth lines of the output buffer shown in Figure 50 on page 79 show:

```
0040 0000000007D6E6D5 C5D9D6D5C5000C81 3000000009199711 7C000C81A0000000
0060 0A0815270C000C83 3000000005000000 0100080260800000 0000000000000000
```

- Create Time structured field

```
000C81A00000000A 0815270C
```

This is the Create Time structured field, which begins at offset x'0059' into the output buffer. The structured field consists of the 8-byte CTM SFI and the 4-byte packed-decimal time (x'0815270C').

- Physical File Sequence structured field

```
000C833000000005 00000001
```

This is the Physical File Sequence structured field, which begins at offset x'0065' into the output buffer. The structured field consists of the 8-byte FILE SFI and the 4-byte binary sequence number (x'00000001').

- End DATASET group SFI

```
0008026080000000
```

This is the End DATASET group SFI, which begins at offset x'0071' into the output buffer.

Processing the Contents of an Output Buffer

To process the contents of an output buffer, consider using the following guidelines:

1. Base the XSF_OUTBUF definition in macro EDGXSF as shown in Figure 51 on the address of the output buffer you are interested in.

XSF_OUTBUF	DSECT	Output	Buffer
XSF_OUTBUF_BUFLNG	DS	1FL4	Buffer Length
XSF_OUTBUF_RQDLNG	DS	1FL4	Required Buffer Length
XSF_OUTBUF_DATALNG	DS	1FL4	Length of Output Data
XSF_OUTBUF_FIELDS	DS	0C	Start of Structured Fields

Figure 51. Output Buffer Definition

2. Base the XSF_SFI definition in macro EDGXSF as shown in Figure 52 on the address of XSF_OUTBUF_FIELDS.

XSF_SFI	DSECT	Structured Field	Introducers
XSF_SFI_LENGTH	DS	1FL2	Length
XSF_SFI_ID	DS	1CL0003	ID (identifier)
	ORG	XSF_SFI_ID	
XSF_SFI_IDVAL	DS	1CL0002	ID (Identifier Value)
XSF_SFI_IDQUAL	DS	1CL0001	ID (Identifier Qualifier)
XSF_SFI_TYPE	DS	1FL1	Type
	DS	1CL0001	Reserved
XSF_SFI_DTYPE	DS	1FL1	Data type
XSF_SFI_LEN	EQU	*-XSF_SFI	
XSF_SFI_DATA	DS	0C	Start of Data

Figure 52. SFI Definition

3. Find the type of structured field you are processing by using the two-byte structured field identifier at XSF_SFI_IDVAL. The values of XSF_SFI_IDQUAL for ADL, address line SFI, and UID, User ID SFI, described in Appendix A, “Structured Field Introducers”, on page 53 are not constant values.
4. Move to the next structured field by adding the length at XSF_SFI_LENGTH to the XSF_SFI pointer.
5. Verify that you have reached the end of the valid data in the output buffer by using the length of the output data at XSF_OUTBUF_DATALNG.
6. Determine the type of data you are processing, by using the value in XSF_SFI_DTYPE.
7. Obtain the length of the data that starts at XSF_SFI_DATA, by subtracting XSF_SFI_LEN from the structured field length at XSF_SFI_LENGTH. in the output buffer.
8. Move to the end of the SFI by adjusting the pointer. In this example, when your pointer is at offset x'00000071' into the output buffer, there are two indicators that you are done with the contents of the buffer:
 - You are looking at the End DATASET group SFI.
 - Adjusting the XSF_SFI pointer by the length of this SFI (8 bytes) points you past the last byte of data in the buffer.
9. Repeat these steps to process each structured field.

In the examples shown in Figure 51 and Figure 52:

- Adding the length of the data (x'00000071') at XSF_OUTBUF_DATALNG to the address of XSF_OUTBUF_DATALNG results in the address just beyond the last

byte of data in the output buffer. You might find this a useful double-check to ensure that you are looking at valid data.

- Your XSF_SFI pointer is at the first structured field in the output buffer (offset 000C in the buffer), and the SFI identifier value at XSF_SFI_IDVAL (0260) tells you that the SFI is a Begin DATASET group. To move to the next structured field, add XSF_SFI_LENGTH (0008) to your pointer.
- Your XSF_SFI pointer is now at the second structured field in the output buffer (offset 0014 in the buffer); XSF_SFI_IDVAL (82A0) identifies the SFI as DSN (Data Set Name); and XSF_SFI_LENGTH (001B) minus XSF_SFI_LEN (8) gives you a length of 19 bytes for the data set name. The type of data is variable-length character because the data type at XSF_SFI_DTYPE equals XSF_SFI_DTYPE_CHAR_VAR.

One method to process SFIs is to use an SFI lookup table containing ID values and addresses of corresponding processing routines. Another method is to use the XSF_SFI_DTYPE: Call an appropriate data-type routine with the address of the SFI or SFI data and the address of an output area as inputs.

After you finish processing this structured field, update the XSF_SFI pointer to the next structured field.

Appendix E. Accessibility

Accessibility features help a user who has a physical disability, such as restricted mobility or limited vision, to use software products successfully. The major accessibility features in z/OS enable users to:

- Use assistive technologies such as screen-readers and screen magnifier software
- Operate specific or equivalent features using only the keyboard
- Customize display attributes such as color, contrast, and font size

Using assistive technologies

Assistive technology products, such as screen-readers, function with the user interfaces found in z/OS. Consult the assistive technology documentation for specific information when using it to access z/OS interfaces.

Keyboard navigation of the user interface

Users can access z/OS user interfaces using TSO/E or ISPF. Refer to *z/OS TSO/E Primer*, *z/OS TSO/E User's Guide*, and *z/OS ISPF User's Guide Volume I* for information about accessing TSO/E and ISPF interfaces. These guides describe how to use TSO/E and ISPF, including the use of keyboard shortcuts or function keys (PF keys). Each guide includes the default settings for the PF keys and explains how to modify their functions.

Notices

This information was developed for products and services offered in the U.S.A. IBM may not offer the products, services, or features discussed in this document in other countries. Consult your local IBM representative for information on the products and services currently available in your area. Any reference to an IBM product, program, or service is not intended to state or imply that only that IBM product, program, or service may be used. Any functionally equivalent product, program, or service that does not infringe any IBM intellectual property right may be used instead. However, it is the user's responsibility to evaluate and verify the operation of any non-IBM product, program, or service.

IBM may have patents or pending patent applications covering subject matter described in this document. The furnishing of this document does not give you any license to these patents. You can send license inquiries, in writing, to:

IBM Director of Licensing
IBM Corporation
North Castle Drive
Armonk, NY 10504-1785
U.S.A.

For license inquiries regarding double-byte (DBCS) information, contact the IBM Intellectual Property Department in your country or send inquiries, in writing, to:

IBM World Trade Asia Corporation Licensing
2-31 Roppongi 3-chome, Minato-ku
Tokyo 106, Japan

The following paragraph does not apply to the United Kingdom or any other country where such provisions are inconsistent with local law:

INTERNATIONAL BUSINESS MACHINES CORPORATION PROVIDES THIS PUBLICATION "AS IS" WITHOUT WARRANTY OF ANY KIND, EITHER EXPRESS OR IMPLIED, INCLUDING, BUT NOT LIMITED TO, THE IMPLIED WARRANTIES OF NON-INFRINGEMENT, MERCHANTABILITY OR FITNESS FOR A PARTICULAR PURPOSE. Some states do not allow disclaimer of express or implied warranties in certain transactions, therefore, this statement may not apply to you.

This information could include technical inaccuracies or typographical errors. Changes are periodically made to the information herein; these changes will be incorporated in new editions of the publication. IBM may make improvements and/or changes in the product(s) and/or the program(s) described in this publication at any time without notice.

IBM may use or distribute any of the information you supply in any way it believes appropriate without incurring any obligation to you.

Licensees of this program who wish to have information about it for the purpose of enabling: (i) the exchange of information between independently created programs and other programs (including this one) and (ii) the mutual use of the information which has been exchanged, should contact:

IBM Corporation
Information Enabling Requests
Dept. DZWA
5600 Cottle Road
San Jose, CA 95193 U.S.A.

Such information may be available, subject to appropriate terms and conditions, including in some cases, payment of a fee.

The licensed program described in this information and all licensed material available for it are provided by IBM under terms of the IBM Customer Agreement, IBM International Program License Agreement, or any equivalent agreement between us.

Programming Interface Information

This publication documents intended Programming Interfaces that allow the customer to write programs to obtain the services of DFSMSrmm.

Trademarks

The following are trademarks of the International Business Machines Corporation in the United States, or other countries, or both:

IBM
DFSMSrmm
MVS
RACF
z/OS

Glossary

This glossary defines technical terms and abbreviations used in DFSMS documentation. If you do not find the term you are looking for, refer to the index of the appropriate DFSMS manual or view the *Glossary of Computing Terms* located at:

<http://www.ibm.com/ibm/terminology/>

This glossary includes terms and definitions from:

- The *American National Standard Dictionary for Information Systems*, ANSI X3.172-1990, copyright 1990 by the American National Standards Institute (ANSI). Copies may be purchased from the American National Standards Institute, 11 West 42nd Street, New York, New York 10036. Definitions are identified by the symbol (A) after the definition.
- The *Information Technology Vocabulary* developed by Subcommittee 1, Joint Technical Committee 1, of the International Organization for Standardization and the International Electrotechnical Commission (ISO/IEC JTC1/SC1). Definitions of published part of this vocabulary are identified by the symbol (I) after the definition; definitions taken from draft international standards, committee drafts, and working papers being developed by ISO/IEC JTC1/SC1 are identified by the symbol (T) after the definition, indicating that final agreement has not yet been reached among the participating National Bodies of SC1.
- The *IBM Dictionary of Computing*, New York: McGraw-Hill, 1994.

The following cross-reference is used in this glossary:

See: This refers the reader to (a) a related term, (b) a term that is the expanded form of an abbreviation or acronym, or (c) a synonym or more preferred term.

A

abend. Abnormal end of task.

AL. American National Standards Label.

AMODE. Addressing mode.

ANDVRS. An RMM ADDVRS TSO subcommand operand. See also *Using AND*.

ANSI. American National Standards Institute.

APAR. Authorized program analysis report.

API. Application Programming interface.

ASA. American Standards Association.

assigned date. The date that the volume is assigned to the current owner. Assigned date is not meaningful for a scratch volume.

AUL. ANSI and user header or trailer label.

automated tape library data server. A device consisting of robotic components, cartridge storage areas, tape subsystems, and controlling hardware and software, together with the set of tape volumes that reside in the library and can be mounted on the library tape drives. Contrast with *manual tape library*. See also *tape library*.

automatic cartridge loader. An optional feature of the 3480 Magnetic Tape Subsystem that allows preloading of multiple tape cartridges. This feature is standard in the 3490 Magnetic Tape Subsystem.

automatic recording. In DFSMSrmm, the process of recording information about a volume and the data sets on the volume in the DFSMSrmm control data set at open or close time.

availability. For a storage subsystem, the degree to which a data set or object can be accessed when requested by a user.

B

backup. The process of creating a copy of a data set or object to be used in case of accidental loss.

basic catalog structure (BCS). The name of the catalog structure in the integrated catalog facility environment. See also *integrated catalog facility catalog*.

BCS. Basic catalog structure.

bin number. The specific shelf location where a volume resides in a storage location; equivalent to a rack number in the removable media library. See also *shelf location*.

BLP. Bypass label processing.

BTLS. Basic Tape Library Support.

built-in storage location. One of the Removable Media Manager defined storage locations: LOCAL, DISTANT, and REMOTE.

C

cache fast write. A storage control capability in which the data is written directly to cache without using nonvolatile storage. Cache fast write is useful for temporary data or data that is readily recreated, such as the sort work files created by DFSORT. Contrast with *DASD fast write*.

cartridge eject. For an IBM Total Storage Enterprise Automated Tape Library (3494), IBM TotalStorage Enterprise Automated Tape Library (3495), or a manual tape library, the act of physically removing a tape cartridge, usually under robot control, by placing it in an output station. The software logically removes the cartridge by deleting or updating the tape volume record in the tape configuration database. For a manual tape library, the act of logically removing a tape cartridge from the manual tape library by deleting or updating the tape volume record in the tape configuration database.

cartridge entry. For either an IBM Total Storage Enterprise Automated Tape Library (3494), IBM TotalStorage Enterprise Automated Tape Library (3495), or a manual tape library, the process of logically adding a tape cartridge to the library by creating or updating the tape volume record in the tape configuration database. The cartridge entry process includes the assignment of the cartridge to scratch or private category in the library.

Cartridge System Tape. The base tape cartridge media used with 3480 or 3490 Magnetic Tape Subsystems. Contrast with *Enhanced Capacity Cartridge System Tape*.

cell. A single cartridge location within an automated tape library dataserer. See also *rack number*.

circular file. A type of file that appends data until full. Then, starting at the beginning of the file, subsequent incoming data overwrites the data already there.

command line. On a display screen, a display line usually at the bottom of the screen in which only commands can be entered.

concurrent copy. A function to increase the accessibility of data by enabling you to make a consistent backup or copy of data concurrent with the usual application program processing.

confirmation panel. A DFSMSrmm panel that lets you tell DFSMSrmm to continue or stop a delete or release action. You specify whether or not you want to confirm delete or release requests in your dialog user options.

container. A receptacle in which one or more exported logical volumes can be stored. A stacked volume containing one or more logical volumes and residing outside a virtual tape server library is considered to be the container for those volumes.

container volume. See *container*.

control data set. A VSAM key-sequenced data set that contains the complete inventory of your removable media library, as well as the movement and retention policies you define. In the control data set DFSMSrmm records all changes made to the inventory, such as adding or deleting volumes.

control data set ID. A one-to-eight character identifier for the DFSMSrmm control data set used to ensure that, in a multi-system, multi-complex environment, the correct management functions are performed.

convenience input. The process of adding a small number of tape cartridges to the IBM TotalStorage Enterprise Automated Tape Library (3494) and the IBM TotalStorage Enterprise Automated Tape Library (3495) without interrupting operations, by inserting the cartridges directly into cells in a convenience input station.

convenience input/output station. A transfer station with combined tape cartridge input and output functions in the IBM TotalStorage Enterprise Automated Tape Libraries (3494) only.

convenience output. The process of removing a small number of tape cartridges from the IBM TotalStorage Enterprise Automated Tape Library (3494) or the IBM TotalStorage Enterprise Automated Tape Library (3495) without interrupting operations, by removing the cartridges directly from cells in a convenience input station.

convenience output station. A transfer station, used by the operator to remove tape cartridges from the automated tape library dataserer, which is accessible from outside the enclosure area.

conversion. In DFSMSrmm, the process of moving your removable media library inventory from another media management system to DFSMSrmm. DFSMSrmm manages the inventory and policies once you have converted it.

create date. Create date for a data set is the date that the data set is written to tape. Create date can also be the date a data set was read if it was created before DFSMSrmm is in use. Create date is updated each time a data set is replaced and not extended. Create date for volumes and other resources defined to DFSMSrmm is the date the resource is defined to DFSMSrmm or the date specified on the command as the create date.

D

DASD. Direct access storage device.

DASD fast write. An extended function of some models of the IBM 3990 Storage Control in which data is written concurrently to cache and nonvolatile storage

and automatically scheduled for destaging to DASD. Both copies are retained in the storage control until the data is completely written to the DASD, providing data integrity equivalent to writing directly to the DASD. Use of DASD fast write for system-managed data sets is controlled by storage class attributes to improve performance. See also *dynamic cache management*. Contrast with *cache fast write*.

DASD volume. A DASD space identified by a common label and accessed by a set of related addresses. See also *volume, primary storage, migration level 1, migration level 2*.

data column. A vertical arrangement of identical data items, used on list panels to display an attribute, characteristic, or value of one or more objects.

data control block (DCB). A control block used by access method routines in storing and retrieving data.

data entry panel. A panel in which the user communicates with the system by filling in one or more fields.

Data Facility Storage Management Subsystem (DFSMS). An operating environment that helps automate and centralize the management of storage. To manage storage, SMS provides the storage administrator with control over data class, storage class, management class, storage group, and automatic class selection routine definitions.

Data Facility Sort. An IBM licensed program that is a high-speed data processing utility. DFSORT provides an efficient and flexible way to handle sorting, merging, and copying operations, as well as providing versatile data manipulation at the record, field, and bit level.

DCB. Data control block.

device. This term is used interchangeably with unit. You mount a tape on a unit or device, such as a 3490.

DFSMSdfp. A DFSMS functional component or base element of z/OS, that provides functions for storage management, data management, program management, device management, and distributed data access.

DFSMSdss. A DFSMS functional component or base element of z/OS, used to copy, move, dump, and restore data sets and volumes.

DFSMShsm. A DFSMS functional component or base element of z/OS, used for backing up and recovering data, and managing space on volumes in the storage hierarchy.

DFSMShsm-managed volume. (1) A primary storage volume, which is defined to DFSMShsm but which does not belong to a storage group. (2) A volume in a storage group, which is using DFSMShsm automatic dump,

migration, or backup services. Contrast with *system-managed volume, DFSMSrmm-managed volume*.

DFSMShsm-owned volume. A storage volume on which DFSMShsm stores backup versions, dump copies, or migrated data sets.

DFSMSrmm. A DFSMS functional component or base element of z/OS, that manages removable media.

DFSMSrmm control data set. See *control data set*.

DFSMSrmm-managed volume. A tape volume that is defined to DFSMSrmm. Contrast with *system-managed volume, DFSMShsm-managed volume*.

disaster recovery. A procedure for copying and storing an installation's essential business data in a secure location, and for recovering that data in the event of a catastrophic problem. Compare with *vital records*.

DISTANT. A DFSMSrmm built-in storage location ID. See *built-in storage location*.

dual copy. A high availability function made possible by nonvolatile storage in some models of the IBM 3990 Storage Control. Dual copy maintains two functionally identical copies of designated DASD volumes in the logical 3990 subsystem, and automatically updates both copies every time a write operation is issued to the dual copy logical volume.

dump class. A set of characteristics that describes how volume dumps are managed by DFSMShsm.

duplexing. The process of writing two sets of identical records in order to create a second copy of data.

dynamic cache management. A function that automatically determines which data sets will be cached based on the 3990 subsystem load, the characteristics of the data set, and the performance requirements defined by the storage administrator.

E

EHPCT. Extended High Performance Cartridge Tape.

eject. The process used to remove a tape volume from a system-managed library. For an automated tape library dataserver, the volume is removed from its cell location and moved to the output station. For a manual tape library, the volume is not moved, but the tape configuration database is updated to show that the volume no longer resides in the manual tape library.

empty bin. A bin that can accept a volume.

Enhanced Capacity Cartridge System Tape.

Cartridge system tape with increased capacity that can only be used with 3490E Magnetic Tape Subsystems. Contrast with *Cartridge System Tape*.

entry panel. See *data entry panel*.

EREP. Environmental Record Editing and Printing program.

expanded output. The output produced by the DFSMSrmm application programming interface when you specify OUTPUT=FIELDS and EXPAND=YES. For those subcommands for which expanded output applies, your application program receives more variable data than for standard output.

expiration. The process by which data sets and volumes are identified as available for reuse. In DFSMSrmm, all volumes have an expiration date or retention period set for them either by vital record specification policy, by user-specified JCL when writing a data set to the volume, or by an installation default. When a volume reaches its expiration date or retention period, it becomes eligible for release.

expiration date. The date at which a file is no longer protected against automatic deletion by the system.

expiration processing. The process of inventory management that ensures expired volumes are released and carries out required release actions on those volumes.

export. The operation to remove one or more logical volumes from a virtual tape server library. First, the list of logical volumes to export must be written on an export list volume and then, the export operation itself must be initiated.

exported logical volume. A logical volume that has gone through the export process and now resides on a stacked volume outside a virtual tape server library.

export list volume. A virtual tape server logical volume containing the list of logical volumes to export.

extended bin support. Enhanced options for managing shelf locations in a storage location including optimized use of the number of bins.

extended extract data set file. A data set created using the DFSMSrmm EDGJRPT exec. The records within the data set combine data set and volume information into single records.

extended record. A record in the DFSMSrmm extract data set that is mapped by the EDGXREXT mapping macro. The record contains both data set and volume information.

external label. A label attached to the outside of a tape cartridge that is to be stored in an IBM 3494 Tape

Library Dataserver or IBM 3495 Tape Library Dataserver. The label might contain the DFSMSrmm rack number of the tape volume.

extract data set. A data set that you use to generate reports.

extract data set record. A record in an extract data set that is mapped by a DFSMSrmm mapping macro.

F

field format. Field format is where the output consists of Structured Field Introducers and variable data rather than output in line format.

filtering. The process of selecting data sets based on specified criteria. These criteria consist of fully or partially-qualified data set names or of certain data set characteristics.

FIPS. Federal Information Processing Standard.

FMID. Function modification identifier.

FRR. Functional recovery routines.

G

generation data group (GDG). A collection of data sets kept in chronological order. Each data set is a generation data set.

generation data set (GDS). One generation of a generation data group.

generation number. The number of a generation within a generation data group. A zero represents the most current generation of the group, a negative integer (-1) represents an older generation and, a positive integer (+1) represents a new generation that has not yet been cataloged.

GDG. Generation data group.

GDS. Generation data set.

giga (G). The information-industry meaning depends upon the context:

1. G = 1 073 741 824(2³⁰) for real and virtual storage.
2. G = 1 000 000 000 for disk storage capacity (for example, a 4 GB fixed disk).
3. G = 1 000 000 000 for transmission rates.

GPR. General purpose register.

GRS. Global resource serialization.

grouping. When creating a report, grouping sorts report output contents into separate groups (and separate pages) based upon field contents.

guaranteed space. A storage class attribute indicating the space is to be preallocated when a data set is created. If you specify explicit volume serial numbers, SMS honors them. If space to satisfy the allocation is not available on the user-specified volumes, the allocation fails.

H

hardware configuration definition (HCD). An interactive interface in MVS that enables an installation to define hardware configurations from a single point of control.

HCD. Hardware configuration definition.

high-capacity input station. A transfer station, used by the operator to add tape cartridges to the IBM TotalStorage Enterprise Automated Tape Library (3494) or the IBM TotalStorage Enterprise Automated Tape Library (3495), which is inside the enclosure area.

high capacity output station. A transfer station, used by the operator to remove tape cartridges from the automated tape library dataserer, which is inside the enclosure area.

home. See *home location*.

home location. For DFSMSrmm, the place where DFSMSrmm normally returns a volume when the volume is no longer retained by vital records processing.

HPCT. High Performance Cartridge Tape.

I

ICETOOL. The DFSORT multipurpose data processing and reporting utility.

ID. Identifier.

IDRC. Improved data recording capability.

import. The operation to enter previously exported logical volumes residing on a stacked volume into a virtual tape server library. First, the list of logical volumes to import must be written on an import list volume and the stacked volumes must be entered, and then, the import operation itself must be initiated.

import list volume. A virtual tape server logical volume containing the list of logical volumes to import. This list can contain individual logical volumes to import and/or it can contain a list of stacked volumes in which all logical volumes on the stacked volume are imported.

imported logical volume. An exported logical volume that has gone through the import process and can be referenced as a tape volume within a virtual tape server

library. An imported logical volume originates from a stacked volume that went through the export process.

improved data recording capability (IDRC). A recording mode that can increase the effective cartridge data capacity and the effective data rate when enabled and used. IDRC is always enabled on the 3490E Magnetic Tape Subsystem.

installation defined storage location. A storage location defined using the LOCDEF command in the EDGRMMxx parmlib member.

integrated catalog facility catalog. A catalog that is composed of a basic catalog structure (BCS) and its related volume tables of contents (VTOCs) and VSAM volume data sets (VVDSs). See also *basic catalog structure*, *VSAM volume data set*.

Interactive Storage Management Facility (ISMF). The interactive interface of DFSMS that allows users and storage administrators access to the storage management functions.

Interactive Problem Control System (IPCS). A system facility that allows interactive problem analysis.

Interactive System Productivity Facility (ISPF). An IBM licensed program used to develop, test, and run interactive, panel-driven dialogs.

internal label. The internal label for standard label tapes is recorded in the VOL1 header label, magnetically recorded on the tape media.

in transit. A volume state where a volume must be moved from one location to another and DFSMSrmm believes that the move has started, but has not yet received confirmation that the move is complete. For a volume moving from a system-managed library, the move starts when the volume is ejected.

inuse bin. A bin that is occupied by a volume and into which no volume can be assigned.

inventory management. The regular tasks that need to be performed to maintain the control data set. See also *expiration processing*, *storage location management processing*, and *vital record processing*.

IPCS. Interactive Problem Control System.

IPL. Initial program load.

ISPF. Interactive System Productivity Facility.

ISMF. Interactive Storage Management Facility.

ISO. International Organization for Standardization.

J

JCL. Job control language.

JES2. Job entry subsystem 2.

JES3. Job entry subsystem 3.

JFCB. Job file control block.

journal. A sequential data set that contains a chronological record of changes made to the DFSMSrmm control data set. You use the journal when you need to reconstruct the DFSMSrmm control data set.

K

keyword. A predefined word that is used as an identifier.

kilo (K). The information-industry meaning depends upon the context:

1. $K = 1024(2^{10})$ for real and virtual storage.
2. $K = 1000$ for disk storage capacity (for example, a 4 KB fixed disk).
3. $K = 1000$ for transmission rates.

L

Library Control System. The Object Access Method component that controls optical and tape library operations and maintains configuration information.

line format. Line format is where text and variable data are formatted into lines suitable for displaying at a terminal or printing as printed documentation.

LOCAL. A DFSMSrmm built-in storage location ID. See *built-in storage location*.

location name. A name given to a place for removable media that DFSMSrmm manages. A location name can be the name of a system-managed library, a storage location name, or the location *SHELF*, identifying shelf space outside a system-managed library or storage locations.

logical volume. Logical volumes have a many-to-one association with physical tape media and are used indirectly by MVS applications. They reside in a Virtual Tape Server or on exported stacked volumes. Applications can access the data on these volumes only when they reside in a Virtual Tape Server which makes the data available via its tape volume cache or after the data has been copied to a physical volume through the use of special utilities.

low-on-scratch management. The process by which DFSMSrmm replenishes scratch volumes in a

system-managed library when it detects that there are not enough available scratch volumes.

LSR. Local shared resource.

M

management class. (1) A named collection of management attributes describing the retention and backup characteristics for a group of data sets, or for a group of objects in an object storage hierarchy. For objects, the described characteristics also include class transition. (2) In DFSMSrmm, if assigned by ACS routine to system-managed tape volumes, management class can be used to identify a DFSMSrmm vital record specification.

manual cartridge entry processing. The process by which a volume is added to the tape configuration database when it is added to a manual tape library. DFSMSrmm can initiate this process.

manual mode. An operational mode where DFSMSrmm runs without recording volume usage or validating volumes. The DFSMSrmm TSO commands, ISPF dialog, and inventory management functions are all available in manual mode.

manual tape library. An installation-defined set of stand-alone tape drives and the set of tape volumes that can be mounted on those drives.

master system. The MVS system where the master DFSMSrmm control data set resides.

master volume. A private volume that contains data that is available for write processing based on the DFSMSrmm EDGRMMxx parmliib MASTEROVERWRITE operand.

media format. The type of volume, recording format and techniques used to create the data on the volume.

media library. Removable media library.

media management system. A program that helps you manage removable media. DFSMSrmm is a media management system.

media name. An up to 8 character value that describes the shape or type of removable media stored in a storage location. Examples of media name are: SQUARE, ROUND, CARTRDGE, 3480.

media type. A value that specifies the volume's media type. Media type can be specified as *, CST, ECCST, HPCT, or EHPCT.

MEDIA 1. Cartridge system tape.

MEDIA 2. Enhanced capacity cartridge system tape.

MEDIA 3. High performance cartridge tape.

MEDIA 4. Extended high performance cartridge tape

mega (M). The information-industry meaning depends upon the context:

1. M = 1 048 576(2²⁰) for real and virtual storage.
2. M = 1 000 000 for disk storage capacity (for example, a 4 MB fixed disk).
3. M = 1 000 000 for transmission rates.

migration. The process of moving unused data to lower cost storage in order to make space for high-availability data. If you wish to use the data set, it must be recalled. See also *migration level 1*, *migration level 2*.

migration level 1. DFSMSHsm-owned DASD volumes that contain data sets migrated from primary storage volumes. The data can be compressed. See also *storage hierarchy*. Contrast with *primary storage*, *migration level 2*.

migration level 2. DFSMSHsm-owned tape or DASD volumes that contain data sets migrated from primary storage volumes or from migration level 1 volumes. The data can be compressed. See also *storage hierarchy*. Contrast with *primary storage*, *migration level 1*.

moving-in volume. A volume for which a move into a bin has been started, but not yet confirmed.

moving-out volume. A volume for which a move out of a bin has been started, but not yet confirmed.

MVS image. A single occurrence of the MVS/ESA operating system that has the ability to process work.

N

name vital record specification. A vital record specification used to define additional retention and movement policy information for data sets or volumes.

NEXTVRS. An RMM ADDVRS TSO subcommand operand. See also *Using Next*.

NL. No label.

nonscratch volume. A volume that is not scratch, which means it has valid or unexpired data on it. Contrast with *scratch*.

NSL. Nonstandard label.

O

OAM. Object access method.

object. A named byte stream having no specific format or record orientation.

object access method (OAM). An access method that provides storage, retrieval, and storage hierarchy

management for objects and provides storage and retrieval management for tape volumes contained in system-managed libraries.

OPC/ESA. Operations Planning and Control/Enterprise Systems Architecture.

optical volume. Storage space on an optical disk, identified by a volume label. See also *volume*.

optical disk. A disk that uses laser technology for data storage and retrieval.

option line. Command line.

owner. In DFSMSrmm, a person or group of persons defined as a DFSMSrmm user owning volumes. An owner is defined to DFSMSrmm through an owner ID.

owner ID. In DFSMSrmm, an identifier for DFSMSrmm users who own volumes.

P

parallel. During conversion, when you install DFSMSrmm concurrently with an existing media management system, it is called running in parallel.

partitioned data set (PDS). A data set on direct access storage that is divided into partitions, called members, each of which can contain a program, part of a program, or data.

PDS. Partitioned data set.

permanent data set. A user-named data set that is normally retained for longer than the duration of a job or interactive session. Contrast with *temporary data set*.

PF. Program function key.

physical stacked volume. See *stacked volume*.

physical volume. A volume that has a one-to-one association with physical tape media and which is used directly by MVS applications. It may reside in an automated tape library dataserwer or be kept on shelf storage either at vault sites or within the data center where it can be mounted on stand-alone tape drives.

pool. A group of shelf locations in the removable media library whose rack numbers share a common prefix. The shelf locations are logically grouped so that the volumes stored there are easier to find and use.

pool ID. The identifier for a pool. You define pool IDs in parmliib member EDGRMMxx.

pooling. The process of arranging shelf locations in the removable media library into logical groups.

pool storage group. A type of storage group that contains system-managed DASD volumes. Pool storage

groups allow groups of volumes to be managed as a single entity. See also *storage group*.

primary space allocation. Amount of space requested by a user for a data set when it is created. Contrast with *secondary space allocation*.

primary storage. A DASD volume available to users for data allocation. The volumes in primary storage are called primary volumes. See also *storage hierarchy*. Contrast with *migration level 1*, *migration level 2*.

primary vital record specification. The first retention and movement policy that DFSMSrmm matches to a data set and volume used for disaster recovery and vital record purposes. See also vital record specification and secondary vital record specification.

private tape volume. A volume assigned to specific individuals or functions.

protect mode. In protect mode, DFSMSrmm validates all volume requests.

pseudo-generation data group. A collection of data sets, using the same data set name pattern, to be managed like a generation data group. The ~ masking character is used in DFSMSrmm to identify the characters in the pattern that change with each generation.

PSW. Program status word.

PTF. Program temporary fix.

pull list. A list of scratch volumes to be pulled from the library for use.

PUT. Program update tape.

R

RACF. Resource Access Control Facility.

rack number. A six-character identifier that corresponds to a specific volume's shelf location in the installation's removable media library, and is the identifier used on the external label of the volume to identify it. The rack number identifies the pool and the external volume serial number for a volume residing in an automated tape library dataserwer. The rack number identifies the pool, the external volume serial, and shelf location number for a volume not residing in an automated tape library dataserwer. The rack number is not written by the tape drive. It exists as an entry in the DFSMSrmm control data set and on the external label of the tape. See also *shelf location*.

rack pool. A group of shelves that contains volumes that are generally read-only.

ready to scratch. This describes the condition where a volume is eligible for scratch processing while it

resides in a storage location. Since no other release actions are required, the volume can be returned to scratch directly from the storage location.

recording format. For a tape volume, the format of the data on the tape; for example, 18 tracks or 36 tracks.

record-only mode. The operating mode where DFSMSrmm records information about volumes as you use them, but does not validate or reject volumes.

recovery. The process of rebuilding data after it has been damaged or destroyed, often by using a backup copy of the data or by reapplying transactions recorded in a journal.

relative start generation. Relative start generation zero is the latest generation of a tape. Relative start generation -1 is the previous generation of that tape. Relative start generation -2 is the generation before the previous one.

REMOTE. A DFSMSrmm built-in storage location ID. See also *built-in storage location*.

removable media. See also *volume*.

removable media library. The volumes that are available for immediate use, and the shelves where they could reside.

report. Data that has been selected and extracted according to the reporting tool, the type of report desired, and the formatting criteria.

reporting tool. A REXX exec that builds control statements to enable you to create reports using a reporting utility.

report type. A data source and how it is mapped.

Resource Access Control Facility (RACF). An IBM licensed program that provides for access control by identifying and verifying the users to the system; authorizing access to protected resources; logging the detected unauthorized attempts to enter the system; and logging the detected accesses to protected resources.

Resource Group. A collection of structured fields that describe the attributes of a resource such as a volume.

Restructured Extended Executor (REXX) Language. A general-purpose, high-level programming language, particularly suitable for EXEC procedures or programs for personal computing.

retention date. Retention date can be the date that a data set or volume is retained by a vital record specification or the date of the inventory management run when the data set or volume is no longer retained by a vital record specification.

retention period. The time for which DFSMSrmm retains a volume or data set before considering it for release. You can retain a data set or volume as part of disaster recovery or vital records management. You set a retention period through a vital record specification that overrides a data set's expiration date.

retention type. The types of retention for which DFSMSrmm retains a volume or data set before considering it for release. The retention types for data sets are BYDAYSCYCLE, CYCLES, DAYS, EXTRADAYS, LASTREFERENCEDAYS, UNTILEXPIRED, and WHILECATALOG. The retention types for volumes are DAYS and CYCLE.

REXX. Restructured Extended Executor Language.

RMF. Resource Measurement Facility.

RMM complex (RMMplex). One or more MVS images that share a common DFSMSrmm control data set.

RMODE. Residence mode.

S

SAF. System Authorization Facility.

scratch. The status of a tape volume that is available for general use, because the data on it is incorrect or is no longer needed. You request a scratch volume when you omit the volume serial number on a request for a tape volume mount.

scratch pool. The collection of tape volumes from which requests for scratch tapes can be satisfied. Contrast with *rack pool*.

scratch processing. The process for returning a volume to scratch status once it is no longer in use and has no outstanding release actions pending.

scratch tape. See *scratch volume*.

scratch volume. A tape volume that contains expired data only. See *scratch*.

SDB. Structured database.

SDSF. Spool display and search facility.

secondary space allocation. Amount of additional space requested by the user for a data set when primary space is full. Contrast with *primary space allocation*.

secondary vital record specification. The second retention and movement policy that DFSMSrmm matches to a data set and volume used for disaster recovery and vital records purposes. See also vital record specification and primary vital record specification.

SFI. Structured field introducer.

shelf. A place for storing removable media, such as tape and optical volumes, when they are not being written to or read.

shelf location. A single space on a shelf for storage of removable media. DFSMSrmm defines a shelf location in the removable media library by a rack number, and a shelf location in a storage location by a bin number. See also *rack number* and *bin number*.

shelf-management. Is the function provided to manage the placement of volumes in individual slots in a location. Shelf-management is provided for the removable media library using rack numbers. For storage locations it is optional as defined by the LOCDEF options in parmlib and uses bin numbers.

shelf-resident volume. A volume that resides in a non-system-managed tape library.

shelf space. See *shelf*.

SL. Standard label.

slot. See *shelf location*.

SMF. System management facility.

SMPE. System Modification Program Extended.

SSI. Subsystem interface.

stacked volume. A volume that has a one-to-one association with physical tape media and which is used in a virtual tape server to store logical volumes. A stacked volume is not used by MVS applications but by the virtual tape server and its associated utilities. It may be removed from a virtual tape server to allow transportation of logical volumes to a vault or to another virtual tape server.

standard label. An IBM standard tape label.

standard output. The output produced by the DFSMSrmm application programming interface when you specify OUTPUT=LINES or EXPAND=NO with OUTPUT=FIELDS.

storage administrator. A person in the data processing center who is responsible for defining, implementing, and maintaining storage management policies.

storage class. A collection of storage attributes that identify performance goals and availability requirements, defined by the storage administrator, used to select a device that can meet those goals and requirements.

storage group. A collection of storage volumes and attributes, defined by the storage administrator. The collections can be a group of DASD volumes or tape

volumes, or a group of DASD volumes and optical volumes treated as a single object storage hierarchy.

storage location. A location physically separate from the removable media library where volumes are stored for disaster recovery, backup, and vital records management.

(storage) location dominance. The priority used by DFSMSrmm to decide where to move a volume within the removable media library during vital record specification processing. It covers all the locations; SHELF, storage locations, and system-managed tape libraries.

storage location management processing. The process of inventory management that assigns a shelf location to volumes that have moved as a result of vital record processing. See also *vital record processing*.

stripe. In DFSMS, the portion of a striped data set, such as an extended format data set, that resides on one volume. The records in that portion are not always logically consecutive. The system distributes records among the stripes such that the volumes can be read from or written to simultaneously to gain better performance. Whether it is striped is not apparent to the application program.

striping. A software implementation of a disk array that distributes a data set across multiple volumes to improve performance.

structured field. Output from the DFSMSrmm application programming interface consisting of a Structured Field Introducer and output data.

structured field introducer (SFI). An 8-byte entity that either introduces the beginning of a group of data or introduces output data that immediately follows the introducer.

subsystem. A special MVS task that provides services and functions to other MVS users. Requests for service are made to the subsystem through a standard MVS facility known as the subsystem interface (SSI). Standard MVS subsystems are the master subsystem and the job entry subsystems JES2 and JES3.

subsystem interface (SSI). The means by which system routines request services of the master subsystem, a job entry subsystem, or other subsystems defined to the subsystem interface.

SUL. IBM standard and user header or trailer label.

SVC. Supervisor call.

system-managed storage. Storage managed by the Storage Management Subsystem. SMS attempts to deliver required services for availability, performance, and space to applications. See also *system-managed storage environment*.

DFSMS environment. An environment that helps automate and centralize the management of storage. This is achieved through a combination of hardware, software, and policies. In the DFSMS environment for MVS, this function is provided by DFSMS, DFSORT, and RACF. See also *system-managed storage*.

system-managed tape library. A collection of tape volumes and tape devices, defined in the tape configuration database. A system-managed tape library can be automated or manual. See also *tape library*.

system-managed volume. A DASD, optical, or tape volume that belongs to a storage group. Contrast with *DFSMSShsm-managed volume*, *DFSMSrmm-managed volume*.

system programmer. A programmer who plans, generates, maintains, extends, and controls the use of an operating system and applications with the aim of improving overall productivity of an installation.

T

tape configuration database (TCDB). One or more volume catalogs used to maintain records of system-managed tape libraries and tape volumes.

tape librarian. The person who manages the tape library. This person is a specialized storage administrator.

tape library. A set of equipment and facilities that support an installation's tape environment. This can include tape storage racks, a set of tape drives, and a set of related tape volumes mounted on those drives. See also *system-managed tape library*, *automated tape library data server*.

Tape Library Control System (TLCS). IBM program offering 5785-EAW. DFSMSrmm replaces TLCS.

tape library dataserver. A hardware device that maintains the tape inventory that is associated with a set of tape drives. An automated tape library dataserver also manages the mounting, removal, and storage of tapes. An automated tape library dataserver that supports system-managed storage of tape volumes. The IBM automated tape library dataservers include the IBM 3494 Tape Library Dataserver and the IBM 3495 Tape Library Dataserver.

tape storage group. A type of storage group that contains system-managed private tape volumes. The tape storage group definition specifies the system-managed tape libraries that can contain tape volumes. See also *storage group*.

tape subsystem. A magnetic tape subsystem consisting of a controller and devices, which allows for

the storage of user data on tape cartridges. Examples of tape subsystems include the IBM 3490 and 3490E Magnetic Tape Subsystems.

tape volume. A tape volume is the recording space on a single tape cartridge or reel. See also *volume*.

TCDB. Tape configuration database.

temporary data set. An uncataloged data set whose name begins with & or &&, that is normally used only for the duration of a job or interactive session. Contrast with *permanent data set*.

tera (T). The information-industry meaning depends upon the context:

1. T = 1 099 511 627 776(2⁴⁰) for real and virtual storage.
2. T = 1 000 000 000 000 for disk storage capacity (for example, 4 TB of DASD storage).
3. T = 1 000 000 000 000 for transmission rates.

TLCS. Tape Library Control System.

TSO. Time Sharing Option.

U

Until Expired. Allows the use of vital record specification policies for managing retention in a location as long as the volume expiration date has not been reached.

use attribute. (1) The attribute assigned to a DAD volume that controls when the volume can be used to allocate new data sets; use attributes are *public*, *private*, and *storage*. (2) For system-managed tape volumes, use attributes are *scratch* and *private*.

user volume. A volume assigned to a user, that can contain any data and can be rewritten as many times as the user wishes until the volume expires.

using AND. A method for linking DFSMSrmm vital record specifications to create chains of vital record specifications. DFSMSrmm applies policies in chains using AND only when all the retention criteria are true.

using NEXT. A method for linking DFSMSrmm vital record specifications to create chains of vital record specifications. DFSMSrmm applies policies in chains using NEXT one vital record at a time.

V

virtual export. A method of exporting a volume by marking a volume as exported by using the DFSMSrmm subcommands.

virtual input/output (VIO) storage group. A type of storage group that allocates data sets to paging

storage, which simulates a DASD volume. VIO storage groups do not contain any actual DASD volumes. See also *storage group*.

virtual tape server (VTS). This subsystem, integrated into the IBM TotalStorage Enterprise Automated Tape Library (3494) or the IBM TotalStorage Enterprise Automated Tape Library (3495), combines the random access and high performance characteristics of DASD with outboard hierarchical storage management and virtual tape devices and tape volumes.

vital record group. A set of data sets with the same name that matches to the same DFSMSrmm vital record specification.

vital record processing. The process of inventory management that determines which data sets and volumes DFSMSrmm should retain and whether a volume needs to move. These volumes and data sets have been assigned a vital record specification.

vital records. A data set or volume maintained for meeting an externally-imposed retention requirement, such as a legal requirement. Compare with *disaster recovery*.

vital record specification. Policies defined to manage the retention and movement of data sets and volumes used for disaster recovery and vital records purposes.

vital record specification management value. A one-to-eight character name defined by your installation and used to assign management and retention values to tape data sets. The vital record management value can be any value you chose to create a match between a vital record specification and data sets and volumes in your installation. By matching the vital record specifications to the data set or volumes, DFSMSrmm applies the retention and movement policies you define in the vital record specifications. During inventory management VRSEL processing, DFSMSrmm selects the correct, best matching vital record specification for a tape data set or volume.

VOLSER. Volume serial number.

volume. The storage space on DASD, tape, or optical devices, which is identified by a volume label. See also *DASD volume*, *logical volume*, *optical volume*, *stacked volume*, and *tape volume*.

volume catalog. See *tape configuration database*.

volume expiration date. The date the volume should expire based on the highest expiration date of the data sets that reside on the volume.

volume serial number (VOLSER). (1) An identification number in a volume label that is assigned when a volume is prepared for use on the system. For standard label volumes, the volume serial number is the VOL1 label of the volume. For no label volumes, the volume

| serial number is the name the user assigns to the
| volume. (2) In DFSMSrmm, volume serial numbers do
| not have to match rack numbers.

VTS. Virtual tape server.

W

warning mode. The operating mode in which DFSMSrmm validates volumes as you use them, but issues warning messages when it discovers errors instead of rejecting volumes.

write-to-operator (WTO). An optional user-coded service that allows a message to be written to the system console operator informing the operator of errors and unusual system conditions that may need to be corrected.

WTO. Write-to-operator.

Index

Numerics

2JBN ('8C8000') - Secondary VRS Jobname Mask 69
2NME ('8C9000') - Secondary VRS Mask 69
2SCD ('8CA000') - Secondary VRS Subchain Start
Date 70
2SCN ('8CB000') - Secondary VRS Subchain
Name 70

A

abbreviations for subcommands 2
abend while open SFI 56
ABND ('800800') - Abend While Open 56
accessibility 83
account number SFI 56
accounting source SFI 56
ACCT ('800800') - Accounting Source 56
ACN ('801000') - Account Number 56
ACS ('801800') - SMSACS 56
ACT ('802000') - Actions on release 56
Action Status SFI 56
actions on release SFI 56
Actions Pending SFI 65
ADDBIN
SFI for 35
subcommand abbreviation 2
ADDDATASET
SFI for 35
subcommand abbreviation 2
ADDDOWNER
SFI for 35
subcommand abbreviation 2
ADDPRODUCT
SFI for 35
subcommand abbreviation 2
ADDRACK
SFI for 35
subcommand abbreviation 2
address line SFI 56
ADDVOLUME
SFI for 35
subcommand abbreviation 2
ADDVRS
SFI for 35
subcommand abbreviation 2
ADL ('803001') - Address Line 56
ADTJ ('804000') - Assigned Date 56
assigned date SFI 56
assigned time SFI 56
AST ('805000') - Action Status 56
ATM ('806000') - Assigned Time 56
AUD ('807000') - SMF Audit Record Number 56
AVL ('808000') - Volume Availability 57

B

backup procedure name SFI 57
BDTJ ('809000') - Last Control Data Set Backup
Date 57
begin and end resource group SFIs 54
begin and end resource groups 32
BIN ('80A000') - Bin Number 57
Bin Count SFI 58
Bin Number Media Name SFI 57
bin number SFI 57
Bin Numbers in DISTANT SFI 58
Bin Numbers in LOCAL SFI 61
Bin Status SFI 66
BKPP ('80B000') - Backup Procedure Name 57
BLKC ('80C000') - Block Count 57
BLKS ('80D000') - Block Size 57
BLKT ('80D030') - Total block count 57
block count SFI 57
block size SFI 57
BLP ('80E000') - BLP Option 57
BLP option SFI 57
BMN ('80F000') - Bin Number Media Name 57
BTM ('810000') - Last Control Data Set Backup
Time 57

C

CACT ('811000') - Control Active Functions 57
Catalog status SFI 58
Catalog Synchronize Date 58
Catalog Synchronize in Progress SFI 60
Catalog Synchronize Time 58
CATRETPD Retention Period SFI 58
CATS ('811800') - CATSYSID Value 57
CATSYSID Value 57
CDSU ('812100') - Control Data Set Percentage Used
SFI 57
CDTJ ('813000') - Create Date 57
CHANGEDATASET
SFI for 36
subcommand abbreviation 2
CHANGEOWNER
SFI for 36
subcommand abbreviation 2
CHANGEPRODUCT
SFI for 36
subcommand abbreviation 2
CHANGEVOLUME
SFI for 36
subcommand abbreviation 2
character set
chart xvi
use in statement xvi
CJBN ('814000') - Job Name 57
CLIB ('815000') - Current Library Name 57
CLS ('816000') - Security Class Description 57

CMDD ('816900') - Command Authorization - DSN SFI 57
 CMDO ('8169A0') - Command Authorization - Owner SFI 58
 CNT ('817000') - Bin, Rack, or Volume Count 58
 Command Authorization - DSN SFI 57
 Command Authorization - Owner SFI 58
 CONTINUE Operation 15
 continuing a request 7, 49
 Control Active Functions SFI 57
 Control Data Set ('812000') - Control Data Set Identifier 57
 Control Data Set Create Date SFI 62
 Control Data Set Create Time SFI 63
 Control Data Set Identifier SFI 57
 Control Data Set Name SFI 62
 Control Data Set Percentage Used SFI 57
 Control Data Set Type SFI 63
 Count of volumes stacked on a stacked volume SFI 67
 CPGM ('817820') - Creating program name 58
 Create Date SFI 57
 Create Time SFI 58
 Creating program name SFI 58
 CRP ('818000') - CATRETPD Retention Period 58
 CSDT ('818800') - Catalog Synchronize Date 58
 CSG ('819000') - Current Storage Group 58
 CSTM ('818800') - Catalog Synchronize Time 58
 CSVE ('819600') - Stacked volume enable status 58
 CTLG ('819800') - Catalog status 58
 CTM ('81A000') - Create Time 58
 CTNR ('81A300') - In container 58
 Current label version SFI 62
 Current Library Name SFI 57
 Current Storage Group SFI 58

D

Data Check Required in IPL SFI 60
 Data Class SFI 58
 data format 26
 Data Set Count SFI 59
 Data Set Name Mask SFI 59
 Data Set Name SFI 59
 Data Set Recording SFI 59
 Data Set Sequence SFI 59
 date format 31
 Date Last Read SFI 59
 Date Last Written SFI 59
 DBIN ('81A600') - Destination bin number 58
 DBMN ('81A700') - Destination bin media name 58
 DBN ('81B000') - Bin Numbers in DISTANT 58
 DC ('81C000') - Data Class 58
 DD ('81D000') - DD Name 58
 DD Name SFI 58
 DDTJ ('81E000') - Delete Date, or Last Store Update Date 58
 Default Lines Per Page SFI 61
 Default Retention Period SFI 59
 Delete Date SFI 58
 DELETEBIN
 SFIs for 36

DELETEBIN (*continued*)
 subcommand abbreviation 2
 DELETEDDATASET
 SFIs for 36
 subcommand abbreviation 2
 DELETEOWNER
 SFIs for 36
 subcommand abbreviation 2
 DELETEPRODUCT
 SFIs for 36
 subcommand abbreviation 2
 DELETERACK
 SFIs for 36
 subcommand abbreviation 2
 DELETEVOLUME
 SFIs for 36
 subcommand abbreviation 2
 DELETEVRS
 SFIs for 36
 subcommand abbreviation 2
 delimiters xvi
 DEN ('81F000') - Media Density 58
 DESC ('820000') - Volume or VRS Description 59
 DEST ('821000') - Destination Name 59
 Destination bin media name SFI 58
 Destination bin number SFI 58
 Destination Name SFI 59
 Destination Type SFI 59
 DEV ('822000') - Device Number 59
 Device Number SFI 59
 DFSMSrmm System ID SFI 66
 disability 83
 Disposition DD name SFI 59
 Disposition Message Prefix SFI 59
 DLRJ ('823000') - Date Last Read 59
 DLWJ ('824000') - Date Last Written 59
 DNM ('825000') - Data Set Name Mask 59
 documents, licensed xii
 DPT ('826000') - Owner's department 59
 DPT ('826000') - Owner's Department 59
 DRP ('827000') - Default Retention Period 59
 DSC ('828000') - Data Set Count 59
 DSEQ ('829000') - Data Set Sequence 59
 DSN ('82A000') - Data Set Name 59
 DSPD ('82A500') - Disposition DD name 59
 DSPM ('82AA00') - Disposition message prefix 59
 DSR ('82B000') - Data Set Recording 59
 DSTT ('82B200') - Destination Type 59
 DTE ('82C000') - Installation Date Format 59
 DTM ('82D000') - Last Store Update Run Time 59

E

EBIN ('82D500') - Extended bin enable status 59
 EDGXAPI module 3
 EDGXCI macro syntax 5
 EDGXCI: Call DFSMSrmm Interface 3
 EDGXSF Structured Field Definitions 74
 EMN ('82E000') - Owner's Node 59
 EMU ('82F000') - Owner's User ID 60
 ENTN ('053000') - Number of Entries 55

ETL ('830000') - Owner's External Telephone Number 60
expanded output 29
Expiration Date Check SFI 69
Expiration Date Ignore SFI 69
Expiration Date SFI 69
Extended bin enable status SFI 59
Extradays retention SFI 67

F

FCD ('831000') - Product Feature Code 60
FCSP ('831800') - Catalog Synchronize in Progress 60
FDB ('832000') - Free Bins in DISTANT Location 60
field format for data 26
FILE ('833000') - Physical File Sequence 60
FLB ('834000') - Free Bin Numbers in LOCAL 60
FOR ('835000') - Owner's Forename 60
FRB ('836000') - Free Bin Numbers in REMOTE 60
FRC ('400000') - Function Return Code 55
Free Bin Numbers in LOCAL SFI 60
Free Bin Numbers in REMOTE SFI 60
Free Bins in DISTANT Location SFI 60
Free Rack Numbers in Library SFI 60
freeing resources 23
FRK ('837000') - Free Rack Numbers in Library 60
FRS ('401000') - Function Reason Code 55
Function Reason Code SFI 55
Function Return Code SFI 55

G

Generic Rack Number SFI 60
GETVOLUME
SFI for 37
subcommand abbreviation 2
GRK ('838000') - Generic Rack Number 60

H

high level assembler 1
HLOC ('839000') - Home Location 60
HLOT ('839200') - Home Location Type 60
Home Location SFI 60
Home Location Type SFI 60

I

In container SFI 58
Installation Date Format SFI 59
Installation RACF Support SFI 65
INTR ('83A000') - Volume Intransit Status 60
IPL ('83B000') - Data Check Required in IPL 60
ITL ('83C000') - Owner's Internal Telephone Number 60

J

JBDT ('83CA00') - Last Journal Backup Date SFI 60
JBTM ('83CB00') - Last Journal Backup Time SFI 60

JDS ('83D000') - Journal Name 60
Job Name SFI 57
Journal Name SFI 60
Journal Percentage Used SFI 61
Journal status SFI 61
JOURNALFULL Parmlib Value SFI 61
JRNF ('83E000') - JOURNALFULL Parmlib Value 61
JRNS ('83EA00') - Journal status 61
JRNU ('83F000') - Journal Percentage Used 61

K

Key From SFI 55
Key to SFI 55
keyboard 83
KEYF ('054000') - Key From 55
KEYT ('054200') - Key to 55

L

Last Change User ID SFI 61
Last Control Data Set Backup Date SFI 57
Last Control Data Set Backup Time SFI 57
Last Control Data Set Extract Date SFI 66
Last Control Data Set Extract Time SFI 66
Last Drive SFI 61
Last Expiration Processing Start Date SFI 67
Last Expiration Processing Start Time SFI 67
Last Inventory Management Expiration Time SFI 69
Last Inventory Management Processing Date SFI 68
Last Inventory Management VRS Time SFI 69
Last Journal Backup Date SFI 60
Last Journal Backup Time SFI 60
Last Store Update Date SFI 58
Last Store Update Run Time SFI 59
Last used DD name SFI 61
Last used job name SFI 61
Last used program name SFI 62
Last used step name SFI 62
LBL ('840000') - Volume Label Type 61
LBN ('841000') - Bin Numbers in LOCAL 61
LCID ('842000') - Last Change User ID 61
LCT ('843000') - Default Lines Per Page 61
LDD ('843B00') - Last used DD name 61
LDDF ('844000') - Location Definition Exists 61
LDEV ('845000') - Last Drive 61
LDLC ('846000') - Location Name 61
LDLT ('847000') - Location Type 61
LDMN ('848000') - Location Media Name 61
LDMT ('849000') - Location Management Type 61
LDPR ('84A000') - Location Priority 61
Library Rack Numbers SFI 62
licensed documents xii
limiting the amount of information returned 49
LINE ('84B000') - Output Data Line 61
line format for data 26
LISTBIN
SFI for 37
subcommand abbreviation 2
LISTCONTROL
SFI for 38

LISTCONTROL *(continued)*
 subcommand abbreviation 2
 LISTDATASET
 SFIs for 41
 subcommand abbreviation 2
 LISTOWNER
 SFIs for 42
 subcommand abbreviation 2
 LISTPRODUCT
 SFIs for 42
 subcommand abbreviation 2
 LISTTRACK
 SFIs for 42
 subcommand abbreviation 2
 LISTVOLUME
 SFIs for 43
 subcommand abbreviation 2
 LISTVRS
 SFIs for 45
 subcommand abbreviation 2
 LJOB ('84B420') - Last used job name 61
 LOAN ('84C000') - Loan Location 61
 Loan Location SFI 61
 LOC ('84D000') - Location 61
 Location Definition Exists SFI 61
 Location Management Type SFI 61
 Location Media Name SFI 61
 Location Name SFI 61
 Location Priority SFI 61
 Location SFI 61
 Location Type SFI 61, 62
 LOCT ('84E000') - Location Type 62
 Logical Record Length SFI 62
 LPGM ('84E760') - Last used program name 62
 LRCL ('84F000') - Logical Record Length 62
 LRK ('850000') - Number of Library Rack Numbers 62
 LSTP ('850370') - Last used step name 62
 LVC ('850500') - current label version 62
 LVN ('850A00') - Required label version 62
 Media Special Attributes SFI 62
 Media Type SFI 62
 MEDN ('856000') - Media Name 62
 MEDR ('857000') - Media Recording Format 62
 MEDT ('858000') - Media Type 62
 Message Line SFI 55
 Message Number SFI 55
 Message SFIs 55
 Message Text Case SFI 63
 Message Variable SFIs 55
 MFR ('859000') - Source Location Name 62
 MID ('85A000') - Mount message ID 63
 MIV ('85A500') - Moving-in volume 63
 MOP ('85C000') - Master Overwrite 63
 Mount message ID SFI 63
 MOV ('85A900') - Moving-out volume 63
 Move By SFI 63
 Move Mode SFI 63
 Move Status SFI 63
 Move Type SFI 63
 Movement Tracking Date SFI 66
 Moving-in volume SFI 63
 Moving-out volume SFI 63
 MOVN ('85B000') - Move Mode 63
 MRP ('85D000') - Maximum Retention Period 63
 MSGF ('85E000') - Case of Message Text 63
 MSGL ('051000') - Message Line 55
 MSGN ('052000') - Message Number 55
 MST ('85F000') - Move Status 63
 MTM ('860000') - Control Data Set Create Time 63
 MTO ('861000') - Target Location Name 63
 MTP ('862000') - Control Data Set Type 63
 MTY ('862800') - Move Type 63
 multiple parameter list, multiple token areas 22
 multiple parameter list, single token area 21
 MVBY ('862B00') - Move By 63
 MVS ('863000') - MVS Use 63
 MVS Use SFI 63

M

Management Class SFI 62
 mapping macros
 EDGXCI 73
 EDGXSF 74
 Master Overwrite SFI 63
 Matching VRS Job Name SFI 68
 Matching VRS Name SFI 68
 Matching VRS Type SFI 69
 MAXHOLD Value SFI 66
 Maximum Retention Period SFI 63
 MC ('851000') - Management Class 62
 MDS ('852000') - Control Data Set Name 62
 MDTJ ('853000') - Control Data Set Create Date 62
 MEDA ('854000') - Media Special Attributes 62
 MEDC ('855000') - Media Compaction 62
 Media Compaction SFI 62
 Media Density SFI 58
 Media Name SFI 62
 Media Recording Format SFI 62

N

Next Vital Record Specification Name SFI 64
 Next Volume SFI 64
 Next VRS Value SFI 68
 NLOC ('865000') - Required Location 63
 NLOT ('865200') - Required location type 63
 NME ('866000') - Security Class Name 63
 NOT ('866800') - Notify 63
 Number of Bin Numbers in REMOTE SFI 65
 Number of Entries SFI 55
 Number of Volumes SFI 68
 NVL ('867000') - Next Volume 64
 NVRS ('868000') - Next VRS Name 64

O

OAC ('869000') - Owner Access 64
 OBMN ('86A000') - Old Bin Number Media Name 64
 OBN ('86B000') - Old Bin Number 64
 obtaining space for output buffer 12

OCE ('86B800') - Volume Information Recorded at O/C/EOV 64
 Offset to Message ID SFI 67
 Old Bin Number Media Name SFI 64
 Old Bin Number SFI 64
 Old Location SFI 64
 Old location type SFI 64
 Old volume SFI 64
 OLOC ('86C000') - Old Location 64
 OLOT ('86C200') - Old location type 64
 Operating Mode SFI 64
 OPL ('86D000') - Position of Rack Number or Pool ID 64
 OPM ('86E000') - Operating Mode 64
 Original Expiration Date SFI 64
 output buffer
 hexadecimal example of an output buffer 79
 obtaining space for 12
 Output Data Line SFI 61
 OVL ('86F000') - Position of Volume Serial 64
 OVOL ('86F500') - Old volume 64
 OWN ('870000') - Owner 64
 Owner Access SFI 64
 Owner SFI 64
 Owner's department SFI 59
 Owner's Department SFI 59
 Owner's External Telephone Number SFI 60
 Owner's Forename SFI 60
 Owner's Internal Telephone Number SFI 60
 Owner's Node SFI 59
 Owner's Surname SFI 67
 Owner's User ID SFI 60
 OXDJ ('871000') - Original Expiration Date 64

P

PACS ('801800') - PREACS 64
 parameter lists
 multiple parameter list, multiple token areas 22
 multiple parameter list, single token area 21
 single parameter list, multiple token areas 19
 single parameter list, single token area 17
 Parmlib Member Suffix SFI 65
 PDA ('871E00') - PDA state 64
 PDA block count SFI 64
 PDA block size SFI 65
 PDA log state SFI 64
 PDA state SFI 64
 PDAC ('871E90') - PDA block count 64
 PDAL ('871E30') - PDA log state 64
 PDAS ('871E90') - PDA block size 65
 PDS ('872000') - Pool Description 65
 PDSC ('873000') - Product Description 65
 PEND ('874000') - Actions Pending 65
 Permanent Read Error SFI 65
 Permanent Write Error SFI 65
 Physical File Sequence SFI 60
 PID ('875000') - Pool Prefix 65
 PLN ('876000') - Pool Name 65
 PNME ('877000') - Product Software Name 65
 PNUM ('878000') - Software Product Number 65

Pool Definition Pool Type SFI 65
 Pool Definition RACF Option SFI 65
 Pool Definition System ID SFI 65
 Pool Description SFI 65
 Pool Name SFI 65
 Pool Prefix SFI 65
 Position of Rack Number or Pool ID SFI 64
 Position of Volume Serial SFI 64
 PRD ('879000') - Permanent Read Errors 65
 PREACS SFI 64
 Previous Volume SFI 65
 PRF ('87A000') - Pool Definition RACF Option 65
 Primary VRS Subchain Name SFI 69
 Primary VRS Subchain Start Date SFI 69
 Priority SFI 65
 Product Description SFI 65
 Product Feature Code SFI 60
 Product Software Name SFI 65
 Programming Guidelines 15
 programming requirements 3
 PRTY ('87B000') - Priority 65
 PSFX ('87C000') - Parmlib Member Suffix 65
 PSN ('87D000') - Pool Definition System ID 65
 PTP ('87E000') - Pool Definition Pool Type 65
 PVL ('87F000') - Previous Volume 65
 PWT ('880000') - Permanent Write Errors 65

R

Rack Count SFI 58
 Rack Number or Bin Number SFI 66
 Rack Status SFI 66
 RBN ('881000') - Number of Bin Numbers in REMOTE 65
 RBYS ('881200') - Retain by set 65
 RCF ('882000') - Installation RACF Support 65
 RCFM ('883000') - Record Format 66
 RCK ('884000') - Rack Number or Bin Number 66
 RDTJ ('886000') - Last Control Data Set Extract Date 66
 Reason Code SFI 55
 Reason code SFIs 54
 Record Format SFI 66
 Reject Type SFI 67
 Release Action Scratch Immediate SFI 69
 releasing all resources 20
 Required label version SFI 62
 Required Location SFI 63
 Required location type SFI 63
 resources
 freeing 23
 obtaining 15
 releasing 24
 RET ('888000') - Retention Type 66
 Retain by set SFI 65
 Retain by SFI 66
 Retention Date SFI 66
 Retention Type SFI 66
 Return Code SFI 55
 Return Code SFIs 54
 Reuse bin at SFI 66

reusing resources 15
 RSNC ('402000') - Reason Code 55
 RST ('88A000') - Rack or Bin Status 66
 RTBY ('88B900') - Retain by 66
 RTDJ ('88C000') - Retention Date 66
 RTM ('88E000') - Last Control Data Set Extract
 Time 66
 RTNC ('403000') - Return Code 55
 RUB ('88E500') - Reuse bin at 66

S

SC ('890000') - Storage Class 66
 SC1 ('894000') - Storenumber 66
 Scratch Immediate SFI 69
 Scratch Procedure Name SFI 67
 SCST ('892000') - Security Class Status 66
 SDTJ ('895000') - Movement Tracking Date 66
 SEARCHBIN
 SFIs for 46
 subcommand abbreviation 2
 SEARCHDATASET
 SFIs for 46
 subcommand abbreviation 2
 SEARCHPRODUCT
 SFIs for 46
 subcommand abbreviation 2
 SEARCHRACK
 limiting the amount of information returned 49
 SFIs for 47
 subcommand abbreviation 2
 SEARCHVOLUME
 SFIs for 47
 subcommand abbreviation 2
 SEARCHVRS
 SFIs for 48
 subcommand abbreviation 2
 SEC ('896000') - Security Class Number 66
 Secondary VRS Jobname Mask SFI 69
 Secondary VRS Mask SFI 69
 Secondary VRS Subchain Name SFI 70
 Secondary VRS Subchain Start Date SFI 70
 Security Class Description SFI 57
 Security Class Name SFI 63
 Security Class Number SFI 66
 Security Class Status SFI 66
 SEQ ('898000') - Volume Sequence 66
 Service Name SFI 55
 SG ('89A000') - Storage Group Name 66
 shortcut keys 83
 SID ('89B000') - DFSMSrmm System ID 66
 single parameter list, multiple token areas 19
 single parameter list, single token area 17
 SLM ('89C000') - MAXHOLD Value 66
 SMF audit record number SFI 56
 SMF Security Record Number SFI 67
 SMF System ID SFI 67
 SMI ('89E000') - Offset to Message ID 67
 SMP ('89E210') - System-managed tape purge 67
 SMSACS SFI 56
 SMU ('89E220') - System-managed tape update 67

Software Product Number SFI 65
 Software Product Version SFI 68
 software requirements 1
 SOSJ ('89F000') - Last Expiration Processing Start
 Date 67
 SOSP ('8A0000') - Scratch Procedure Name 67
 SOST ('8A1000') - Last XPROC Start Time 67
 Source Location Name SFI 62
 SSM ('8A2000') - SMF Security Record Number 67
 Stacked volume enable status SFI 58
 standard output 29
 STEP ('8A3000') - Step Name 67
 Step Name SFI 67
 Storage Class SFI 66
 Storage Group Name SFI 66
 Storenumber SFI 66
 Structured Field Introducer
 data format 26
 for begin and end resource groups 54
 for Messages and Message Variables 55
 for Return and Reason Codes 54
 for subcommand output data 56
 format 53
 Structured Field Introducer Definitions 53
 STVC ('8A3800') - Count of volumes stacked on a
 stacked volume 67
 subcommand output data SFIs 56
 Supported Subcommands 2
 SUR ('8A4000') - Owner's Surname 67
 SVCN ('404000') - Service Name 55
 syntax for EDGXCI 5
 SYS ('8A5000') - SMF System ID 67
 System-managed tape purge SFI 67
 System-managed tape update SFI 67

T

TAC ('8A6000') - Reject Type 67
 Target Location Name SFI 63
 Temporary Read Error SFI 67
 Temporary Write Error SFI 67
 time format 31
 Total block count SFI 57
 TRD ('8A7000') - Temporary Read Errors 67
 TVXP ('8A7900') - Extradays retention 67
 TWT ('8A8000') - Temporary Write Errors 67
 TYP ('8A9000') - VRS Type 67
 TYPE ('055200') - Type To 55
 Type From SFI 55
 Type To SFI 55
 Types of Structured Field Introducers 32
 TYPF ('055000') - Type From 55

U

UID ('8AB001') - User ID 67
 UNC ('8AC000') - Uncatalog Option 67
 Uncatalog Option SFI 67
 USEC ('8AD000') - Volume Use Count 68
 USEM ('8AE000') - Volume Usage (KB) 68
 User ID SFI 67

User Notification SFI 63
using multiple parameter lists 16

V

VAC ('8AF001') - Volume Access 68
VACT ('8B0000') - VRSMIN Action 68
VANX ('8B0800') - Next VRS Value 68
VCAP ('8B0B00') - Volume capacity 68
VCHG ('8B1000') - VRSCCHANGE Value 68
VDD ('8B2000') - VRS Delay Days 68
VDTJ ('8B3000') - Last Inventory Management
Processing Date 68
VER ('8B4000') - Software Product Version 68
Vital Record Count SFI 68
Vital Record Specification Delay Days SFI 68
Vital record specification name SFI 69
Vital Record Specification SFI 65
Vital Record Specification Type SFI 67
VJBN ('8B5000') - Matching VRS Job Name 68
VLN ('8B6000') - Number of Volumes 68
VM ('8B7000') - VM Use 68
VM Use SFI 68
VMIN ('8B8000') - VRSMIN Count Value 68
VMV ('8B9000') - VRS Management Value 68
VNME ('8BA000') - Matching VRS Name 68
VOL ('8BC000') - Volume Serial 68
VOL1 ('8BCD00') - VOL1 label volser 68
VOL1 label volser SFI 68
VOLT ('8BC200') - Volume type 68
Volume Access SFI 68
volume availability SFI 57
Volume capacity 68
Volume Count SFI 58
Volume Description SFI 59
Volume Information Recorded at O/C/EOV Indicator
SFI 64
Volume Intransit Status SFI 60
Volume Label Type SFI 61
Volume percent full SFI 68
Volume Sequence SFI 66
Volume Serial SFI 68
Volume Status SFI 69
Volume type SFI 68
Volume Usage SFI 68
Volume Use Count SFI 68
VPCT ('8BC300') - Volume percent full 68
VRC ('8BD000') - Vital Record Count 68
VRJ ('8BE000') - VRS Job Name 68
VRS ('8BF000') - Vital Record Specification 68
VRS ('8BF000') - Vital record specification name 69
VRS Description SFI 59
VRS Job Name SFI 68
VRS Management Value SFI 68
VRS Retained Status SFI 69
VRSCCHANGE Value SFI 68
VRSEL Value SFI 69
VRSI ('8BF500') - Scratch immediate 69
VRSL ('8BFA00') - VRSEL Value 69
VRSMIN Action SFI 68
VRSMIN Count Value SFI 68

VRSR ('8C0000') - VRS Retained Status 69
VRXI ('8C0800') - Expiration Date Ignore 69
VSCD ('8C1000') - Primary VRS Subchain Start
Date 69
VSCN ('8C1800') - Primary VRS Subchain Name 69
VST ('8C2000') - Volume Status 69
VTM ('8C3000') - Last Inventory Management VRS
Time 69
VTYP ('8C4000') - Matching VRS Type 69

X

XDC ('8C5000') - Expiration Date Check 69
XDTJ ('8C6000') - Expiration Date 69
XTM ('8C7000') - Last Inventory Management Expiration
Time 69

Readers' Comments — We'd Like to Hear from You

z/OS
DFSMSrmm Application Programming Interface

Publication No. SC26-7403-02

Overall, how satisfied are you with the information in this book?

	Very Satisfied	Satisfied	Neutral	Dissatisfied	Very Dissatisfied
Overall satisfaction	<input type="checkbox"/>	<input type="checkbox"/>	<input type="checkbox"/>	<input type="checkbox"/>	<input type="checkbox"/>

How satisfied are you that the information in this book is:

	Very Satisfied	Satisfied	Neutral	Dissatisfied	Very Dissatisfied
Accurate	<input type="checkbox"/>	<input type="checkbox"/>	<input type="checkbox"/>	<input type="checkbox"/>	<input type="checkbox"/>
Complete	<input type="checkbox"/>	<input type="checkbox"/>	<input type="checkbox"/>	<input type="checkbox"/>	<input type="checkbox"/>
Easy to find	<input type="checkbox"/>	<input type="checkbox"/>	<input type="checkbox"/>	<input type="checkbox"/>	<input type="checkbox"/>
Easy to understand	<input type="checkbox"/>	<input type="checkbox"/>	<input type="checkbox"/>	<input type="checkbox"/>	<input type="checkbox"/>
Well organized	<input type="checkbox"/>	<input type="checkbox"/>	<input type="checkbox"/>	<input type="checkbox"/>	<input type="checkbox"/>
Applicable to your tasks	<input type="checkbox"/>	<input type="checkbox"/>	<input type="checkbox"/>	<input type="checkbox"/>	<input type="checkbox"/>

Please tell us how we can improve this book:

Thank you for your responses. May we contact you? Yes No

When you send comments to IBM, you grant IBM a nonexclusive right to use or distribute your comments in any way it believes appropriate without incurring any obligation to you.

Name

Address

Company or Organization

Phone No.



Fold and Tape

Please do not staple

Fold and Tape




NO POSTAGE
NECESSARY
IF MAILED IN THE
UNITED STATES

BUSINESS REPLY MAIL

FIRST-CLASS MAIL PERMIT NO. 40 ARMONK, NEW YORK

POSTAGE WILL BE PAID BY ADDRESSEE

International Business Machines Corporation
RCF Processing Department
M86/050
5600 Cottle Road
SAN JOSE, CA U.S.A. 95193-0001



Fold and Tape

Please do not staple

Fold and Tape



Program Number: 5694-A01

Printed in U.S.A.

SC26-7403-02

