

z/Architecture



Reference Summary

z/Architecture



Reference Summary

Seventh Edition (August, 2010)

This revision differs from the previous edition by containing instructions related to the facilities marked by a bar under “Facility” in “Preface” and minor corrections and clarifications. Changes are indicated by a bar in the margin.

References in this publication to IBM® products, programs, or services do not imply that IBM intends to make these available in all countries in which IBM operates. Any reference to an IBM program product in this publication is not intended to state or imply that only IBM’s program product may be used. Any functionally equivalent program may be used instead.

Additional copies of this and other IBM publications may be ordered or downloaded from the IBM publications web site at <http://www.ibm.com/support/documentation>.

Please direct any comments on the contents of this publication to:

IBM Corporation
Department E57
2455 South Road
Poughkeepsie, NY
12601-5400
USA

IBM may use or distribute whatever information you supply in any way it believes appropriate without incurring any obligation to you.

© Copyright International Business Machines Corporation 2001-2010. All rights reserved.

US Government Users Restricted Rights — Use, duplication, or disclosure restricted by GSA ADP Schedule Contract with IBM Corp.

Preface

This publication is intended primarily for use by z/Architecture™ assembler-language application programmers. It contains basic machine information summarized from the *IBM z/Architecture Principles of Operation*, SA22-7832, about the zSeries™ processors. It also contains frequently used information from *IBM ESA/390 Common I/O-Device Commands and Self Description*, SA22-7204, *IBM System/370 Extended Architecture Interpretive Execution*, SA22-7095, and *IBM High Level Assembler for MVS & VM & VSE Language Reference*, SC26-4940. This publication will be updated from time to time. However, the above publications and others cited in this publication are the authoritative reference sources and will be first to reflect changes.

The following instructions may be uninstalled or not available on a particular model:

Facility	Instruction
ASN-and-LX reuse	EPAIR, ESAIR, PTI, SSAIR
Compare-and-swap-and-store	CSST
Conditional load/store	LGOC, LGROC, LOC, LROC, STGOC, STOC
Configuration Topology	PTF
DAT enhancement	CSPG, IDTE
DAT enhancement 2	LPTEA
Decimal-floating-point	ADTR, AXTR, CDGTR, CDSTR, CDTR, CDUTR, CEDTR, CEXTR, CGDTR, CGXTR, CSDTR, CSXTR, CUDTR, CUXTR, CXGTR, CXSTR, CXTR, CXUTR, DDTR, DXTR, EEDTR, EEXTR, ESDTR, ESXTR, FIDTR, FIXTR, IEDTR, IEXTR, KDTR, KXTR, LDETR, LDSTR, LEDTR, LTDTR, LTSTR, LXDTR, MDT, MXTR, QADTR, QAXTR, RRDTR, RRRTR, SDTR, SLDT, SLXT, SRDT, SRXT, SXTR, TDCDT, TDCET, TDCXT, TDGDT, TDGET, TDGXT
Decimal-floating-point-rounding	SRNMT
Distinct-operands	AGHIK, AGRK, AHK, ALGHSIK, ALGRK, ALHSIK, ALRK, ARK, NGRK, NRK, OGRK, ORK, SGRK, SLAK, SLGRK, SLLK, SLRK, SRAK, SRK, SRLK, XGRK, XRK
Enhanced DAT	PFMF
Execute extensions	EXRL
Expanded storage	PGIN, PGOUT
Extended immediate	AFI, AGFI, ALFI, ALGFI, CFI, CGFI, CLFI, CLGFI, FLOGR, IIHF, IILF, LBR, LGBR, LGHR, LGFI, LHR, LLC, LLCR, LLGCR, LLGHR, LLH, LLHR, LLIH, LLILF, LT, LTG, NIHF, NILF, OIHF, OILF, SLFI, SLGFI, XIHF, XILF
Extended translation 2	CLCLU, MVCLU, PKA, PKU, TP, TROO, TROT, TRTO, TRTT, UNPKA, UNPKU
Extended translation 3	CU14, CU24, CU41, CU42, SRSTU, TRTR
Extract CPU time	ECTG
Floating-point-extension	ADTRA, AXTRA, CDFBRA, CDFTR, CDGBRA, CDGTRA, CDLFBR, CDLFTR, CDLGBR, CDLGTR, CEFBRA, CEBBRA, CELFBR, CELGBR, CFDBRA, CFDTR, CFEBRA, CFXBRA, CFSTR, CGDBRA, CGDTRA, CGEBRA, CGXBRA, CGXTRA, CLFDBR, CLFDTR, CLFEBR, CLFXBR, CLFXTR, CLGDBR, CLGDTR, CLGEBR, CLGXBR, CLGXTR, CFXBRA, CXFTR, CXGBRA, CXGTRA, CXLFB, CXLFTR, CXLGBR, CXLGTR, DDTRA, DXTRA, FIDBRA, FIEBRA, FIXBRA, LDXBRA, LEDBRA, LEXBRA, MDTRA, MXTRA, SDTRA, SRNMB, SXTRA
Floating-point-support-sign-handling	CPSDR, LCDFR, LNDFR, LPDFR
FPR-GR-transfer	LDGR, LGDR

Facility	Instruction
General-instructions-extension	ASI, AGSI, ALSI, ALGSI, CRB, CGRB, CRJ, CGRJ, CRT, CGRT, CGH, CHHSI, CHSI, CGHSI, CHRL, CGHRL, CIB, CGIB, CIJ, CGIJ, CIT, CGIT, CLRB, CLGRB, CLRJ, CLGRJ, CLRT, CLGRT, CLHHSI, CLFHSI, CLGHSI, CLIB, CLGIB, CLIJ, CLGIJ, CLFIT, CLGIT, CLRL, CLHRL, CLGRL, CLGHRL, CLGFRL, CRL, CGRL, CGFRL, ECAG, LAEY, LTGF, LHRL, LGHRL, LLHRL, LLGHRL, LLGFRL, LRL, LGRL, LGFRL, MVHHI, MVHI, MVGHI, MFY, MHY, MSFI, MSGFI, PFD, PFDRL, RNSBG, RXSBG, RISBG, ROSBG, STHRL, STRL, STGRL
HFP multiply-and-add/subtract	MAD, MADR, MAE, MAER, MSD, MSDR, MSE, MSER
HFP unnormalized extensions	MAY, MAYR, MAYH, MAYHR, MAYL, MAYLR, MY, MYH, MYL, MYR, MYHR, MYLR
High-word	AHHR, AHHLR, AIH, ALHHR, ALHHLR, ALSIH, ALSIHN, BRCTH, CHF, CHHR, CHLR, CIH, CLHF, CLHHR, CLHLR, CLIH, LBH, LHH, LFH, LLCH, LLHH, RISBHG, RISBLG, STCH, STHH, STFH
IEEE-Exception-Simulation	LFAS, SFASR
Interlocked-access	LAA, LAAG, LAAL, LAALG, LAN, LANG, LAO, LAOG, LAX, LAXG, LPD, LPDG
Long displacement	AHY, ALY, AY, CDSY, CHY, CLIJ, CLMY, CLY, CSY, CVBY, CVDY, CY, ICY, IY, LAMY, LAY, LB, LDY, LEY, LGB, LHY, LMY, LRAY, LY, MSY, MVIY, NIY, NY, OIY, OY, SHY, SLY, STAMY, STCMY, STCY, STDY, STEY, STHY, STMY, STY, SY, TMY, XIY, XY
Message-security assist	KM, KMC, KIMD, KLMD, KMAC
Message-security assist extension 3	PCKMO
Message-security assist extension 4	KMCTR, KMF, KMO, PCC
Move-with-optional-specifications	MVCOS
Parsing enhancement	TRTE, TRTRE
Perform-floating-point-operation	PFPO
Population-count	POPCNT
Reset-reference-bits-multiple	RRBM
Store-clock fast	STCKF
Store-facility-list extended	STFLE
TOD-clock steering	PTFF

For information about Enterprise Systems Architecture/390® (ESA/390™) architecture, refer to *IBM Enterprise Systems Architecture/390 Principles of Operation*, SA22-7201, and *IBM Enterprise Systems Architecture/390 Reference Summary*, SA22-7209.

Note: IBM, z/Architecture, zSeries, Enterprise Systems Architecture/390, and ESA/390 are trademarks of the International Business Machines Corporation in the United States, other countries, or both.















Contents
















Preface	iii
Contents	v
Machine Instruction Formats	1
Machine Instructions by Mnemonic	5
Machine Instructions by Operation Code	22
Condition Codes	27
Assembler Instructions	31
Extended-Mnemonic Instructions for Branch on Condition	32
Extended-Mnemonic Instructions for Relative-Branch Instructions	33
Extended-Mnemonic Suffixes for Compare-and-Branch and Compare-and-Trap Instructions	33
Extended-Mnemonic Suffixes for Rotate-Then-Insert/AND/OR/ XOR-Selected-Bits Instructions	33
CNOP Alignment	34
Summary of Constants	34
Operand of Store Clock	34
Operand of Store Clock Extended	35
Fixed Storage Locations	35
External-Interrupt Codes	36
Program-Interrupt Codes	36
Data-Exception Code (DXC)	37
Translation-Exception Identification	38
Facility Indications	39
Control Registers	40
Floating-Point-Control (FPC) Register	42
Program-Status Word (PSW)	42
z/Architecture PSW	42
ESA/390 PSW	43
Dynamic Address Translation	43
Virtual-Address Format	43
Address-Space-Control Element (ASCE)	43
Region-Table or Segment-Table Designation (RTD or STD)	43
Real-Space Designation (RSD)	44
Table Values	44
Region-Table Entry (RTE)	44
Segment-Table Entry (STE, FC=0)	44
Segment-Table Entry (STE, FC=1)	45
Page-Table Entry (PTE)	45
ASN Translation	45
Address-Space Number (ASN)	45
ASN-First-Table Entry	45
ASN-Second-Table Entry (ASTE)	45
PC-Number Translation	46
Program-Call Number (20-Bit)	46
Program-Call Number (32-Bit, Bit 44=0)	46
Program-Call Number (32-Bit, Bit 44=1)	47
Linkage-Table Entry (LTE)	47
Linkage-First-Table Entry (LFTE)	47
Linkage-Second-Table Entry (LSTE)	47
Entry-Table Entry (ETE)	47
Access-Register Translation	48
Access-List-Entry Token (ALET)	48
















Dispatchable-Unit-Control Table (DUCT)	48
Access-List Entry (ALE)	49
Linkage-Stack Entries	50
Entry Descriptor	50
Header Entry (Entry Type 0001001)	50
Trailer Entry (Entry Type 0001010)	50
Branch State Entry (Entry Type 0001100) and Program-Call State Entry (Entry Type 0001101)	51
Trapping	52
Trap Control Block	52
Trap Save Area	52
Trace-Entry Formats	53
Identification of Trace Entries	53
Branch	54
Branch in Subspace Group (if ASN Tracing on)	55
Mode Switch	55
Mode-Switching Branch	55
Program Call	56
Program Return	57
Program Transfer	58
Set Secondary ASN	59
Trace	59
Machine-Check Interruption Code	60
External-Damage Code	60
Operation-Request Block (ORB)	61
Command-Mode ORB	61
Transport-Mode ORB	61
Channel-Command Word (CCW)	62
Format-0 CCW	62
Format-1 CCW	62
Indirect-Data-Address Word (IDAW)	62
Format-1 IDAW	62
Format-2 IDAW	62
Modified-CCW-Indirect-Data-Address Word (MIDAW)	63
Transport Control Word (TCW)	63
Transport-Indirect-Data-Address Word (TIDAW)	64
Transport Command Control Block (TCCB)	64
Transport Command Area Header (TCAH)	64
Device-Command Word (DCW)	65
Transport Command Area Trailer (TCAT)	66
CBC-Offset Block (COB)	66
Transport Status Block (TSB)	67
Transport Status Header (TSH)	67
I/O-Status TSA	67
Device-Detected-Program-Check TSA	68
Interrogate TSA	69
Subchannel-Information Block (SCHIB)	70
Path-Management-Control Word (PMCW)	70
Interruption-Response Block (IRB)	71
Command-Mode Subchannel-Status Word (SCSW)	71
Transport-Mode Subchannel-Status Word (SCSW)	72
Extended-Status Word (ESW)	73
Format-0 ESW	73
Format-0 ESW Word 0 (Subchannel Logout)	74


Format-0 ESW Word 1 (Extended-Report Word)	74
Format-1 ESW Word 0	74
Format-2 ESW Word 0 ¹	74
Format-3 ESW Word 0 ¹	74
Information Stored in ESW	75
Extended-Control Word (ECW)	75
Extended-Measurement Word	76
Format 0 Measurement Block	76
Format 1 Measurement Block	76
Channel-Report Word (CRW)	77
Error-Recovery Codes	77
Reporting Source	77
I/O Command Codes	77
Standard Command-Code Assignments (CCW and DCW Bits 0-7) .	
77	
Standard Meanings of Bits of First Sense Byte	78
Character Assignments	79
Control Character Representations	81
Additional ISO-8 Control Character Representations	81
Formatting Character Representations	81
Two-Character BSC Data Link Controls	81
Commonly Used Editing Pattern Characters	81
ANSI-Defined Printer Control Characters	82
Hexadecimal and Decimal Conversion	82
Powers of 2 and 16	84

Machine Instruction Formats









1, 2, 3, 4, 5

Denotes association with first, second, third, fourth, or fifth operand

a, b, c, d, e, f

Distinguishes among instances of the same basic instruction format

B₁, B₂, B₄

Base register designation field

D₁, D₂, D₄

Displacement field

I, I₂, I₃, I₄, I₅

Immediate operand field

L, L₁, L₂

Length field

M₁, M₃, M₄

Mask field

R₁, R₂, R₃

Register designation field

X₂

Index register designation field

‡

For certain instructions, this operand is not defined

Machine Instructions by Mnemonic

Mnemonic	Operands	Name	Format	Op-code	Class & Notes
A	$R_1, D_2(X_2, B_2)$	Add (32)	RX-a	5A	c
AD	$R_1, D_2(X_2, B_2)$	Add Normalized (LH)	RX-a	6A	c
ADB	$R_1, D_2(X_2, B_2)$	Add (LB)	RXE	ED1A	c
ADBR	R_1, R_2	Add (LB)	RRE	B31A	c
ADR	R_1, R_2	Add Normalized (LH)	RR	2A	c
ADTR	R_1, R_2, R_3	Add (LD)	RRF-a	B3D2	c TF
ADTRA	R_1, R_2, R_3, M_4	ADD (LD)	RRF-a	B3D2	c F
AE	$R_1, D_2(X_2, B_2)$	Add Normalized (SH)	RX-a	7A	c
AEB	$R_1, D_2(X_2, B_2)$	Add (SB)	RXE	ED0A	c
AEBR	R_1, R_2	Add (SB)	RRE	B30A	c
AER	R_1, R_2	Add Normalized (SH)	RR	3A	c
AFI	R_1, I_2	Add Immediate (32)	RIL-a	C29	c EI
AG	$R_1, D_2(X_2, B_2)$	Add (64)	RXY-a	E308	c N
AGF	$R_1, D_2(X_2, B_2)$	Add ($64 \leftarrow 32$)	RXY-a	E318	c N
AGFI	R_1, I_2	Add Immediate ($64 \leftarrow 32$)	RIL-a	C28	c EI
AGFR	R_1, R_2	Add ($64 \leftarrow 32$)	RRE	B918	c N
AGHI	R_1, I_2	Add Halfword Immediate ($64 \leftarrow 16$)	RI-a	A7B	c N
AGHIK	R_1, R_3, I_2	Add Immediate ($64 \leftarrow 16$)	RIE-d	ECD9	c DO
AGR	R_1, R_2	Add (64)	RRE	B908	c N
AGRK	R_1, R_2, R_3	Add (64)	RRF-a	B9E8	c DO
AGSI	$D_1(B_1), I_2$	Add Immediate ($64 \leftarrow 8$)	SIY	EB7A	c GE
AH	$R_1, D_2(X_2, B_2)$	Add Halfword ($32 \leftarrow 16$)	RX-a	4A	c
AHHHR	R_1, R_2, R_3	Add High (32)	RRF-a	B9C8	c HW
AHHLR	R_1, R_2, R_3	Add High (32)	RRF-a	B9D8	c HW
AHI	R_1, I_2	Add Halfword Immediate ($32 \leftarrow 16$)	RI-a	A7A	c
AHIK	R_1, R_3, I_2	Add Immediate ($32 \leftarrow 16$)	RIE-d	ECD8	c DO
AHY	$R_1, D_2(X_2, B_2)$	Add Halfword ($32 \leftarrow 16$)	RXY-a	E37A	c LD
AIH	R_1, I_2	Add Immediate High (32)	RIL-a	CC8	c HW
AL	$R_1, D_2(X_2, B_2)$	Add Logical (32)	RX-a	5E	c
ALC	$R_1, D_2(X_2, B_2)$	Add Logical with Carry (32)	RXY-a	E398	c N3
ALCG	$R_1, D_2(X_2, B_2)$	Add Logical with Carry (64)	RXY-a	E388	c N
ALCGR	R_1, R_2	Add Logical with Carry (64)	RRE	B988	c N
ALCR	R_1, R_2	Add Logical with Carry (32)	RRE	B998	c N3
ALFI	R_1, I_2	Add Logical Immediate (32)	RIL-a	C2B	c EI
ALG	$R_1, D_2(X_2, B_2)$	Add Logical (64)	RXY-a	E30A	c N
ALGF	$R_1, D_2(X_2, B_2)$	Add Logical ($64 \leftarrow 32$)	RXY-a	E31A	c N
ALGFI	R_1, I_2	Add Logical Immediate ($64 \leftarrow 32$)	RIL-a	C2A	c EI
ALGFR	R_1, R_2	Add Logical ($64 \leftarrow 32$)	RRE	B91A	c N
ALGHSIK	R_1, R_3, I_2	Add Logical with Signed Immediate ($64 \leftarrow 16$)	RIE-d	ECDB	c DO
ALGR	R_1, R_2	Add Logical (64)	RRE	B90A	c N
ALGRK	R_1, R_2, R_3	Add Logical (64)	RRF-a	B9EA	c DO
ALGSI	$D_1(B_1), I_2$	Add Logical with Signed Immediate ($64 \leftarrow 8$)	SIY	EB7E	c GE
ALHHHR	R_1, R_2, R_3	Add Logical High (32)	RRF-a	B9CA	c HW
ALHHLR	R_1, R_2, R_3	Add Logical High (32)	RRF-a	B9DA	c HW
ALHSIK	R_1, R_3, I_2	Add Logical with Signed Immediate ($32 \leftarrow 16$)	RIE-d	ECDA	c DO
ALR	R_1, R_2	Add Logical (32)	RR	1E	c
ALRK	R_1, R_2, R_3	Add Logical (32)	RRF-a	B9FA	c DO
ALSI	$D_1(B_1), I_2$	Add Logical with Signed Immediate ($32 \leftarrow 8$)	SIY	EB6E	c GE
ALSIH	R_1, I_2	Add Logical with Signed Immediate High (32)	RIL-a	CCA	c HW
ALSIHN	R_1, I_2	Add Logical with Signed Immediate High (32)	RIL-a	CCB	HW
ALY	$R_1, D_2(X_2, B_2)$	Add Logical (32)	RXY-a	E35E	c LD
AP	$D_1(L_1, B_1), D_2(L_2, B_2)$	Add Decimal	SS-b	FA	c
AR	R_1, R_2	Add (32)	RR	1A	c
ARK	R_1, R_2, R_3	Add (32)	RRF-a	B9F8	c DO
ASI	$D_1(B_1), I_2$	Add Immediate ($32 \leftarrow 8$)	SIY	EB6A	c GE

Mnemonic	Operands	Name	Format	Op-code	Class & Notes
AU	R ₁ ,D ₂ (X ₂ ,B ₂)	Add Unnormalized (SH)	RX-a	7E	c
AUR	R ₁ ,R ₂	Add Unnormalized (SH)	RR	3E	c
AW	R ₁ ,D ₂ (X ₂ ,B ₂)	Add Unnormalized (LH)	RX-a	6E	c
AWR	R ₁ ,R ₂	Add Unnormalized (LH)	RR	2E	c
AXBR	R ₁ ,R ₂	Add (EB)	RRE	B34A	c
AXR	R ₁ ,R ₂	Add Normalized (EH)	RR	36	c
AXTR	R ₁ ,R ₂ ,R ₃	Add (ED)	RRF-a	B3DA	c TF
AXTRA	R ₁ ,R ₂ ,R ₃ ,M ₄	ADD (ED)	RRF-a	B3DA	c F
AY	R ₁ ,D ₂ (X ₂ ,B ₂)	Add (32)	RXY-a	E35A	c LD
BAKR	R ₁ ,R ₂	Branch and Stack	RRE	B240	q
BAL	R ₁ ,D ₂ (X ₂ ,B ₂)	Branch and Link	RX-a	45	
BALR	R ₁ ,R ₂	Branch and Link	RR	05	
BAS	R ₁ ,D ₂ (X ₂ ,B ₂)	Branch and Save	RX-a	4D	
BASR	R ₁ ,R ₂	Branch and Save	RR	0D	
BASSM	R ₁ ,R ₂	Branch and Save and Set Mode	RR	0C	
BC	M ₁ ,D ₂ (X ₂ ,B ₂)	Branch on Condition	RX-b	47	
BCR	M ₁ ,R ₂	Branch on Condition	RR	07	
BCT	R ₁ ,D ₂ (X ₂ ,B ₂)	Branch on Count (32)	RX-a	46	
BCTG	R ₁ ,D ₂ (X ₂ ,B ₂)	Branch on Count (64)	RXY-a	E346	N
BCTGR	R ₁ ,R ₂	Branch on Count (64)	RRE	B946	N
BCTR	R ₁ ,R ₂	Branch on Count (32)	RR	06	
BRAS	R ₁ ,I ₂	Branch Relative and Save	RI-b	A75	
BRASL	R ₁ ,I ₂	Branch Relative and Save Long	RIL-b	C05	N3
BRC	M ₁ ,I ₂	Branch Relative on Condition	RI-c	A74	
BRCL	M ₁ ,I ₂	Branch Relative on Condition Long	RIL-c	C04	N3
BRCT	R ₁ ,I ₂	Branch Relative on Count (32)	RI-b	A76	
BRCTG	R ₁ ,I ₂	Branch Relative on Count (64)	RI-b	A77	N
BRCTH	R ₁ ,R ₁₂	Branch Relative on Count High (32)	RIL-b	CC6	HW
BRXH	R ₁ ,R ₃ ,I ₂	Branch Relative on Index High (32)	RSI	84	
BRXHG	R ₁ ,R ₃ ,I ₂	Branch Relative on Index High (64)	RIE-e	EC44	N
BRXLE	R ₁ ,R ₃ ,I ₂	Branch Relative on Index Low or Equal (32)	RSI	85	
BRXLG	R ₁ ,R ₃ ,I ₂	Branch Relative on Index Low or Equal (64)	RIE-e	EC45	N
BSA	R ₁ ,R ₂	Branch and Set Authority	RRE	B25A	q
BSG	R ₁ ,R ₂	Branch in Subspace Group	RRE	B258	
BSM	R ₁ ,R ₂	Branch and Set Mode	RR	0B	
BXH	R ₁ ,R ₃ ,D ₂ (B ₂)	Branch on Index High (32)	RS-a	86	
BXHG	R ₁ ,R ₃ ,D ₂ (B ₂)	Branch on Index High (64)	RSY-a	EB44	N
BXLE	R ₁ ,R ₃ ,D ₂ (B ₂)	Branch on Index Low or Equal (32)	RS-a	87	
BXLEG	R ₁ ,R ₃ ,D ₂ (B ₂)	Branch on Index Low or Equal (64)	RSY-a	EB45	N
C	R ₁ ,D ₂ (X ₂ ,B ₂)	Compare (32)	RX-a	59	c
CD	R ₁ ,D ₂ (X ₂ ,B ₂)	Compare (LH)	RX-a	69	c
CDB	R ₁ ,D ₂ (X ₂ ,B ₂)	Compare (LB)	RXE	ED19	c
CDBR	R ₁ ,R ₂	Compare (LB)	RRE	B319	c
CDFBR	R ₁ ,R ₂	Convert from Fixed (LB←32)	RRE	B395	
CDFBRA	R ₁ ,M ₃ ,R ₂ ,M ₄	Convert from Fixed (LB←32)	RRF-e	B395	F
CDFR	R ₁ ,R ₂	Convert from Fixed (LH←32)	RRE	B3B5	
CDFTR	R ₁ ,M ₃ ,R ₂ ,M ₄	Convert from Fixed (LD←32)	RRE	B951	F
CDGBR	R ₁ ,R ₂	Convert from Fixed (LB←64)	RRE	B3A5	N
CDGBRA	R ₁ ,M ₃ ,R ₂ ,M ₄	Convert from Fixed (LB←64)	RRF-e	B3A5	F
CDGR	R ₁ ,R ₂	Convert from Fixed (LH←64)	RRE	B3C5	N
CDGTR	R ₁ ,R ₂	Convert from Fixed (LD←64)	RRE	B3F1	TF
CDGTRA	R ₁ ,M ₃ ,R ₂ ,M ₄	Convert from Fixed (LD←64)	RRF-e	B3F1	F
CDLFBR	R ₁ ,M ₃ ,R ₂ ,M ₄	Convert from Logical (LB←32)	RRF-e	B391	F
CDLFTR	R ₁ ,M ₃ ,R ₂ ,M ₄	Convert from Logical (LD←32)	RRF-e	B953	F
CDLGBR	R ₁ ,M ₃ ,R ₂ ,M ₄	Convert from Logical (LB←64)	RRF-e	B3A1	F
CDLGTR	R ₁ ,M ₃ ,R ₂ ,M ₄	Convert from Logical (LD←64)	RRF-e	B952	F
CDR	R ₁ ,R ₂	Compare (LH)	RR	29	c
CDS	R ₁ ,R ₃ ,D ₂ (B ₂)	Compare Double and Swap (32)	RS-a	BB	c
CDSG	R ₁ ,R ₃ ,D ₂ (B ₂)	Compare Double and Swap (64)	RSY-a	EB3E	c N
CDSTR	R ₁ ,R ₂	Convert from Signed Packed (LD←64)	RRE	B3F3	TF

Mnemonic	Operands	Name	Format	Op-code	Class & Notes
CDSY	R ₁ ,R ₃ ,D ₂ (B ₂)	Compare Double and Swap (32)	RSY-a	EB31	c LD
CDTR	R ₁ ,R ₂	Compare (LD)	RRE	B3E4	c TF
CDUTR	R ₁ ,R ₂	Convert from Unsigned Packed (LD←64)	RRE	B3F2	TF
CE	R ₁ ,D ₂ (X ₂ ,B ₂)	Compare (SH)	RX-a	79	c
CEB	R ₁ ,D ₂ (X ₂ ,B ₂)	Compare (SB)	RXE	ED09	c
CEBR	R ₁ ,R ₂	Compare (SB)	RRE	B309	c
CEDTR	R ₁ ,R ₂	Compare Biased Exponent (LD)	RRE	B3F4	c TF
CEFBR	R ₁ ,R ₂	Convert from Fixed (SB←32)	RRE	B394	
CEFBRA	R ₁ ,M ₃ ,R ₂ ,M ₄	Convert from Fixed (SB←32)	RRF-e	B394	F
CEFR	R ₁ ,R ₂	Convert from Fixed (SH←32)	RRE	B3B4	
CEGBR	R ₁ ,R ₂	Convert from Fixed (SB←64)	RRE	B3A4	N
CEGBRA	R ₁ ,M ₃ ,R ₂ ,M ₄	Convert from Fixed (SB←64)	RRF-e	B3A4	F
CEGR	R ₁ ,R ₂	Convert from Fixed (SH←64)	RRE	B3C4	N
CELFBR	R ₁ ,M ₃ ,R ₂ ,M ₄	Convert from Logical (SB←32)	RRF-e	B390	F
CELGBR	R ₁ ,M ₃ ,R ₂ ,M ₄	Convert from Logical (SB←64)	RRF-e	B3A0	F
CER	R ₁ ,R ₂	Compare (SH)	RR	39	c
CEXTR	R ₁ ,R ₂	Compare Biased Exponent (ED)	RRE	B3FC	c TF
CFC	D ₂ (B ₂)	Compare and Form Codeword	S	B21A	i c
CFDBR	R ₁ ,M ₃ ,R ₂	Convert to Fixed (32←LB)	RRF-e	B399	c
CFDBRA	R ₁ ,M ₃ ,R ₂ ,M ₄	Convert to Fixed (32←LB)	RRF-e	B399	c F
CFDR	R ₁ ,M ₃ ,R ₂	Convert to Fixed (32←LH)	RRF-e	B3B9	c
CFDTR	R ₁ ,M ₃ ,R ₂ ,M ₄	Convert to Fixed (32←LD)	RRF-e	B941	c F
CFEBR	R ₁ ,M ₃ ,R ₂	Convert to Fixed (32←SB)	RRF-e	B398	c
CFEBRA	R ₁ ,M ₃ ,R ₂ ,M ₄	Convert to Fixed (32←SB)	RRF-e	B398	c F
CFER	R ₁ ,M ₃ ,R ₂	Convert to Fixed (32←SH)	RRF-e	B3B8	c
CFI	R ₁ ,I ₂	Compare Immediate (32)	RIL-a	C2D	c EI
CFXBR	R ₁ ,M ₃ ,R ₂	Convert to Fixed (32←EB)	RRF-e	B39A	c
CFXBRA	R ₁ ,M ₃ ,R ₂ ,M ₄	Convert to Fixed (32←EB)	RRF-e	B39A	c F
CFXR	R ₁ ,M ₃ ,R ₂	Convert to Fixed (32←EH)	RRF-e	B3BA	c
CFXTR	R ₁ ,M ₃ ,R ₂ ,M ₄	Convert to Fixed (32←ED)	RRF-e	B949	c F
CG	R ₁ ,D ₂ (X ₂ ,B ₂)	Compare (64)	RXY-a	E320	c N
CGDBR	R ₁ ,M ₃ ,R ₂	Convert to Fixed (64←LB)	RRF-e	B3A9	c N
CGDBRA	R ₁ ,M ₃ ,R ₂ ,M ₄	Convert to Fixed (64←LB)	RRF-e	B3A9	c F
CGDR	R ₁ ,M ₃ ,R ₂	Convert to Fixed (64←LH)	RRF-e	B3C9	c N
CGDTR	R ₁ ,M ₃ ,R ₂	Convert to Fixed (64←LD)	RRF-e	B3E1	c TF
CGDTRA	R ₁ ,M ₃ ,R ₂ ,M ₄	Convert to Fixed (64←LD)	RRF-e	B3E1	c F
CGEBR	R ₁ ,M ₃ ,R ₂	Convert to Fixed (64←SB)	RRF-e	B3A8	c N
CGEBRA	R ₁ ,M ₃ ,R ₂ ,M ₄	Convert to Fixed (64←SB)	RRF-e	B3A8	c F
CGER	R ₁ ,M ₃ ,R ₂	Convert to Fixed (64←SH)	RRF-e	B3C8	c N
CGF	R ₁ ,D ₂ (X ₂ ,B ₂)	Compare (64←32)	RXY-a	E330	c N
CGFI	R ₁ ,I ₂	Compare Immediate (64←32)	RIL-a	C2C	c EI
CGFR	R ₁ ,R ₂	Compare (64←32)	RRE	B930	c N
CGFRL	R ₁ ,I ₂	Compare Relative Long (64←32)	RIL-b	C6C	c GE
CGH	R ₁ ,D ₂ (X ₂ ,B ₂)	Compare Halfword (64←16)	RXY-a	E334	c GE
CGHI	R ₁ ,I ₂	Compare Halfword Immediate (64←16)	RI-a	A7F	c N
CGHRL	R ₁ ,I ₂	Compare Halfword Relative Long (64←16)	RIL-b	C64	c GE
CGHSI	D ₁ (B ₁),I ₂	Compare Halfword Immediate (64←16)	SIL	E558	c GE
CGIB	R ₁ ,I ₂ ,M ₃ ,D ₄ (B ₄)	Compare Immediate and Branch (64←8)	RIS	ECFC	GE
CGIJ	R ₁ ,I ₂ ,M ₃ ,I ₄	Compare Immediate and Branch Relative (64←8)	RIE-c	EC7C	GE
CGIT	R ₁ ,I ₂ ,M ₃	Compare Immediate and Trap (64←16)	RIE-a	EC70	GE
CGR	R ₁ ,R ₂	Compare (64)	RRE	B920	c N
CGRB	R ₁ ,R ₂ ,M ₃ ,D ₄ (B ₄)	Compare and Branch (64)	RRS	ECE4	GE
CGRJ	R ₁ ,R ₂ ,M ₃ ,I ₄	Compare and Branch Relative (64)	RIE-b	EC64	GE
CGRL	R ₁ ,I ₂	Compare Relative Long (64)	RIL-b	C68	c GE
CGRT	R ₁ ,R ₂ ,M ₃	Compare and Trap (64)	RRF-c	B960	GE
CGXBR	R ₁ ,M ₃ ,R ₂	Convert to Fixed (64←EB)	RRF-e	B3AA	c N
CGXBRA	R ₁ ,M ₃ ,R ₂ ,M ₄	Convert to Fixed (64←EB)	RRF-e	B3AA	c F
CGXR	R ₁ ,M ₃ ,R ₂	Convert to Fixed (64←EH)	RRF-e	B3CA	c N
CGXTR	R ₁ ,M ₃ ,R ₂	Convert to Fixed (64←ED)	RRF-e	B3E9	c TF

Mnemonic	Operands	Name	Format	Op-code	Class & Notes
CGXTRA	R ₁ ,M ₃ ,R ₂ ,M ₄	Convert to Fixed (64←ED)	RRF-e	B3E9	c F
CH	R ₁ ,D ₂ (X ₂ ,B ₂)	Compare Halfword (32←16)	RX-a	49	c
CHF	R ₁ ,D ₂ (X ₂ ,B ₂)	Compare High (32)	RXY-a	E3CD	c HW
CHHR	R ₁ ,R ₂	Compare High (32)	RRE	B9CD	c HW
CHHSI	D ₁ (B ₁),I ₂	Compare Halfword Immediate (16←16)	SIL	E554	c GE
CHI	R ₁ ,I ₂	Compare Halfword Immediate (32←16)	RI-a	A7E	c
CHLR	R ₁ ,R ₂	Compare High (32)	RRE	B9DD	c HW
CHRL	R ₁ ,I ₂	Compare Halfword Relative Long (32←16)	RIL-b	C65	c GE
CHSI	D ₁ (B ₁),I ₂	Compare Halfword Immediate (32←16)	SIL	E55C	c GE
CHY	R ₁ ,D ₂ (X ₂ ,B ₂)	Compare Halfword (32←16)	RXY-a	E379	c LD
CIB	R ₁ ,I ₂ ,M ₃ ,D ₄ (B ₄)	Compare Immediate and Branch (32←8)	RIS	ECFE	GE
CIH	R ₁ ,I ₂	Compare Immediate High (32)	RIL-a	CCD	c HW
CIJ	R ₁ ,I ₂ ,M ₃ ,I ₄	Compare Immediate and Branch Relative (32←8)	RIE-c	EC7E	GE
CIT	R ₁ ,I ₂ ,M ₃	Compare Immediate and Trap (32←16)	RIE-a	EC72	GE
CKSM	R ₁ ,R ₂	Checksum	RRE	B241	c
CL	R ₁ ,D ₂ (X ₂ ,B ₂)	Compare Logical (32)	RX-a	55	c
CLC	D ₁ (L,B ₁),D ₂ (B ₂)	Compare Logical (character)	SS-a	D5	c
CLCL	R ₁ ,R ₂	Compare Logical Long	RR	0F	i c
CLCLE	R ₁ ,R ₃ ,D ₂ (B ₂)	Compare Logical Long Extended	RS-a	A9	c
CLCLU	R ₁ ,R ₃ ,D ₂ (B ₂)	Compare Logical Long Unicode	RSY-a	EB8F	c E2
CLFDBR	R ₁ ,M ₃ ,R ₂ ,M ₄	Convert to Logical (32←LB)	RRF-e	B39D	c F
CLFDTR	R ₁ ,M ₃ ,R ₂ ,M ₄	Convert to Logical (32←LD)	RRF-e	B943	c F
CLFEBR	R ₁ ,M ₃ ,R ₂ ,M ₄	Convert to Logical (32←SB)	RRF-e	B39C	c F
CLFHSI	D ₁ (B ₁),I ₂	Compare Logical Immediate (32←16)	SIL	E55D	c GE
CLFI	R ₁ ,I ₂	Compare Logical Immediate (32)	RIL-a	C2F	c EI
CLFIT	R ₁ ,I ₂ ,M ₃	Compare Logical Immediate and Trap (32←16)	RIE-a	EC73	GE
CLFXBR	R ₁ ,M ₃ ,R ₂ ,M ₄	Convert to Logical (32←EB)	RRF-e	B39E	c F
CLFXTR	R ₁ ,M ₃ ,R ₂ ,M ₄	Convert to Logical (32←ED)	RRF-e	B94B	c F
CLG	R ₁ ,D ₂ (X ₂ ,B ₂)	Compare Logical (64)	RXY-a	E321	c N
CLGDBR	R ₁ ,M ₃ ,R ₂ ,M ₄	Convert to Logical (64←LB)	RRF-e	B3AD	c F
CLGDTR	R ₁ ,M ₃ ,R ₂ ,M ₄	Convert to Logical (64←LD)	RRF-e	B942	c F
CLGEBR	R ₁ ,M ₃ ,R ₂ ,M ₄	Convert to Logical (64←SB)	RRF-e	B3AC	c F
CLGF	R ₁ ,D ₂ (X ₂ ,B ₂)	Compare Logical (64←32)	RXY-a	E331	c N
CLGFI	R ₁ ,I ₂	Compare Logical Immediate (64←32)	RIL-a	C2E	c EI
CLGFR	R ₁ ,R ₂	Compare Logical (64←32)	RRE	B931	c N
CLGFRL	R ₁ ,I ₂	Compare Logical Relative Long (64←32)	RIL-b	C6E	c GE
CLGHRL	R ₁ ,I ₂	Compare Logical Relative Long (64←16)	RIL-b	C66	c GE
CLGHSI	D ₁ (B ₁),I ₂	Compare Logical Immediate (64←16)	SIL	E559	c GE
CLGIB	R ₁ ,I ₂ ,M ₃ ,D ₄ (B ₄)	Compare Logical Immediate and Branch (64←8)	RIS	ECFD	GE
CLGIJ	R ₁ ,I ₂ ,M ₃ ,I ₄	Compare Logical Immediate and Branch Relative (64←8)	RIE-c	EC7D	GE
CLGIT	R ₁ ,I ₂ ,M ₃	Compare Logical Immedial and Trap (64←16)	RIE-a	EC71	GE
CLGR	R ₁ ,R ₂	Compare Logical (64)	RRE	B921	c N
CLGRB	R ₁ ,R ₂ ,M ₃ ,D ₄ (B ₄)	Compare Logical and Branch (64)	RRS	ECE5	GE
CLGRJ	R ₁ ,R ₂ ,M ₃ ,I ₄	Compare Logical and Branch Relative (64)	RIE-b	EC65	GE
CLGRL	R ₁ ,I ₂	Compare Logical Relative Long (64)	RIL-b	C6A	c GE
CLGRT	R ₁ ,R ₂ ,M ₃	Compare Logical and Trap (64)	RRF-c	B961	GE
CLGXBR	R ₁ ,M ₃ ,R ₂ ,M ₄	Convert to Logical (64←EB)	RRF-e	B3AE	c F
CLGXTR	R ₁ ,M ₃ ,R ₂ ,M ₄	Convert to Logical (64←ED)	RRF-e	B94A	c F
CLHF	R ₁ ,D ₂ (X ₂ ,B ₂)	Compare Logical High (32)	RXY-a	E3CF	c HW
CLHHR	R ₁ ,R ₂	Compare Logical High (32)	RRE	B9CF	c HW
CLHHSI	D ₁ (B ₁),I ₂	Compare Logical Immediate (16←16)	SIL	E555	c GE
CLHLR	R ₁ ,R ₂	Compare Logical High (32)	RRE	B9DF	c HW
CLHRL	R ₁ ,I ₂	Compare Logical Relative Long (32←16)	RIL-b	C67	c GE
CLI	D ₁ (B ₁),I ₂	Compare Logical Immediate	SI	95	c
CLIB	R ₁ ,I ₂ ,M ₃ ,D ₄ (B ₄)	Compare Logical Immediate and Branch (32←8)	RIS	ECFF	GE
CLIH	R ₁ ,I ₂	Compare Logical Immediate High (32)	RIL-a	CCF	c HW

Mnemonic	Operands	Name	Format	Op-code	Class & Notes
CLIJ	R ₁ ,I ₂ ,M ₃ ,I ₄	Compare Logical Immediate and Branch Relative (32←8)	RIE-c	EC7F	GE
CLII	D ₁ (B ₁),I ₂	Compare Logical Immediate	SIY	EB55	c LD
CLM	R ₁ ,M ₃ ,D ₂ (B ₂)	Compare Logical Characters under Mask	RS-b	BD	c
CLMH	R ₁ ,M ₃ ,D ₂ (B ₂)	Compare Logical Characters under Mask	RSY-b	EB20	c N
CLMY	R ₁ ,M ₃ ,D ₂ (B ₂)	Compare Logical Characters under Mask	RSY-b	EB21	c LD
CLR	R ₁ ,R ₂	Compare Logical (32)	RR	15	c
CLRB	R ₁ ,R ₂ ,M ₃ ,D ₄ (B ₄)	Compare Logical and Branch (32)	RRS	ECF7	GE
CLRJ	R ₁ ,R ₂ ,M ₃ ,I ₄	Compare Logical and Branch Relative (32)	RIE-b	EC77	GE
CLRL	R ₁ ,I ₂	Compare Logical Relative Long (32)	RIL-b	C6F	c GE
CLRT	R ₁ ,R ₂ ,M ₃	Compare Logical and Trap (32)	RRF-c	B973	GE
CLST	R ₁ ,R ₂	Compare Logical String	RRE	B25D	c
CLY	R ₁ ,D ₂ (X ₂ ,B ₂)	Compare Logical (32)	RXY-a	E355	c LD
CMPSC	R ₁ ,R ₂	Compression Call	RRE	B263	i c
CP	D ₁ (L ₁ ,B ₁),D ₂ (L ₂ ,B ₂)	Compare Decimal	SS-b	F9	c
CPSDR	R ₁ ,R ₃ ,R ₂	Copy Sign	RRF-b	B372	FS
CPYA	R ₁ ,R ₂	Copy Access	RRE	B24D	
CR	R ₁ ,R ₂	Compare (32)	RR	19	c
CRB	R ₁ ,R ₂ ,M ₃ ,D ₄ (B ₄)	Compare and Branch (32)	RRS	ECF6	GE
CRJ	R ₁ ,R ₂ ,M ₃ ,I ₄	Compare and Branch Relative (32)	RIE-b	EC76	GE
CRL	R ₁ ,I ₂	Compare Relative Long (32)	RIL-b	C6D	c GE
CRT	R ₁ ,R ₂ ,M ₃	Compare and Trap (32)	RRF-c	B972	GE
CS	R ₁ ,R ₃ ,D ₂ (B ₂)	Compare and Swap (32)	RS-a	BA	c
CSCH		Clear Subchannel	S	B230	p c
CSDTR	R ₁ ,R ₂ ,M ₄	Convert to Signed Packed (64←LD)	RRF-d	B3E3	TF
CSG	R ₁ ,R ₃ ,D ₂ (B ₂)	Compare and Swap (64)	RSY-a	EB30	c N
CSP	R ₁ ,R ₂	Compare and Swap and Purge (32)	RRE	B250	p c
CSPG	R ₁ ,R ₂	Compare and Swap and Purge (64)	RRE	B98A	p c DE
CSST	D ₁ (B ₁),D ₂ (B ₂),R ₃	Compare and Swap and Store	SSF	C82	c
CSXTR	R ₁ ,R ₂ ,M ₄	Convert to Signed Packed (128←ED)	RRF-d	B3EB	TF
CSY	R ₁ ,R ₃ ,D ₂ (B ₂)	Compare and Swap (32)	RSY-a	EB14	c LD
CU12	R ₁ ,R ₂ [,M ₃]	Convert UTF-8 to UTF-16	RRF-c	B2A7	c
CU14	R ₁ ,R ₂ [,M ₃]	Convert UTF-8 to UTF-32	RRF-c	B9B0	c E3
CU21	R ₁ ,R ₂ [,M ₃]	Convert UTF-16 to UTF-8	RRF-c	B2A6	c
CU24	R ₁ ,R ₂ [,M ₃]	Convert UTF-16 to UTF-32	RRF-c	B9B1	c E3
CU41	R ₁ ,R ₂	Convert UTF-32 to UTF-8	RRE	B9B2	c E3
CU42	R ₁ ,R ₂	Convert UTF-32 to UTF-16	RRE	B9B3	c E3
CUDTR	R ₁ ,R ₂	Convert to Unsigned Packed (64←LD)	RRE	B3E2	TF
CUSE	R ₁ ,R ₂	Compare until Substring Equal	RRE	B257	i c
CUTFU	R ₁ ,R ₂ [,M ₃]	Convert UTF-8 to Unicode	RRF-c	B2A7	c
CUUTF	R ₁ ,R ₂ [,M ₃]	Convert Unicode to UTF-8	RRF-c	B2A6	c
CUXTR	R ₁ ,R ₂	Convert to Unsigned Packed (128←ED)	RRE	B3EA	TF
CVB	R ₁ ,D ₂ (X ₂ ,B ₂)	Convert to Binary (32)	RX-a	4F	
CVBG	R ₁ ,D ₂ (X ₂ ,B ₂)	Convert to Binary (64)	RXY-a	E30E	N
CVBY	R ₁ ,D ₂ (X ₂ ,B ₂)	Convert to Binary (32)	RXY-a	E306	LD
CVD	R ₁ ,D ₂ (X ₂ ,B ₂)	Convert to Decimal (32)	RX-a	4E	
CVDG	R ₁ ,D ₂ (X ₂ ,B ₂)	Convert to Decimal (64)	RXY-a	E32E	N
CVDY	R ₁ ,D ₂ (X ₂ ,B ₂)	Convert to Decimal (32)	RXY-a	E326	LD
CXBR	R ₁ ,R ₂	Compare (EB)	RRE	B349	c
CXFBR	R ₁ ,R ₂	Convert from Fixed (EB←32)	RRE	B396	
CXFBRA	R ₁ ,M ₃ ,R ₂ ,M ₄	Convert from Fixed (EB←32)	RRF-e	B396	F
CXFR	R ₁ ,R ₂	Convert from Fixed (EH←32)	RRE	B3B6	
CXFTR	R ₁ ,M ₃ ,R ₂ ,M ₄	Convert from Fixed (ED←32)	RRE	B959	F
CXGBR	R ₁ ,R ₂	Convert from Fixed (EB←64)	RRE	B3A6	N
CXGBRA	R ₁ ,M ₃ ,R ₂ ,M ₄	Convert from Fixed (EB←64)	RRF-e	B3A6	F
CXGR	R ₁ ,R ₂	Convert from Fixed (EH←64)	RRE	B3C6	N
CXGTR	R ₁ ,R ₂	Convert from Fixed (ED←64)	RRE	B3F9	TF
CXGTRA	R ₁ ,M ₃ ,R ₂ ,M ₄	Convert from Fixed (ED←64)	RRF-e	B3F9	F
CXLFBR	R ₁ ,M ₃ ,R ₂ ,M ₄	Convert from Logical (EB←32)	RRF-e	B392	F
CXLFTR	R ₁ ,M ₃ ,R ₂ ,M ₄	Convert from Logical (ED←32)	RRF-e	B95B	F

Mnemonic	Operands	Name	Format	Op-code	Class & Notes
CXLGBR	R ₁ ,M ₃ ,R ₂ ,M ₄	Convert from Logical (EB←64)	RRF-e	B3A2	F
CXLGTR	R ₁ ,M ₃ ,R ₂ ,M ₄	Convert from Logical (ED←64)	RRF-e	B95A	F
CXR	R ₁ ,R ₂	Compare (EH)	RRE	B369	c
CXSTR	R ₁ ,R ₂	Convert from Signed Packed (ED←128)	RRE	B3FB	TF
CXTR	R ₁ ,R ₂	Compare (ED)	RRE	B3EC	c TF
CXUTR	R ₁ ,R ₂	Convert from Unsigned Packed (ED←128)	RRE	B3FA	TF
CY	R ₁ ,D ₂ (X ₂ ,B ₂)	Compare (32)	RXY-a	E359	c LD
D	R ₁ ,D ₂ (X ₂ ,B ₂)	Divide (32←64)	RX-a	5D	
DD	R ₁ ,D ₂ (X ₂ ,B ₂)	Divide (LH)	RX-a	6D	
DDB	R ₁ ,D ₂ (X ₂ ,B ₂)	Divide (LB)	RXE	ED1D	
DDBR	R ₁ ,R ₂	Divide (LB)	RRE	B31D	
DDR	R ₁ ,R ₂	Divide (LH)	RR	2D	
DDTR	R ₁ ,R ₂ ,R ₃	Divide (LD)	RRF-a	B3D1	TF
DDTRA	R ₁ ,R ₂ ,R ₃ ,M ₄	Divide (LD)	RRF-a	B3D1	F
DE	R ₁ ,D ₂ (X ₂ ,B ₂)	Divide (SH)	RX-a	7D	
DEB	R ₁ ,D ₂ (X ₂ ,B ₂)	Divide (SB)	RXE	ED0D	
DEBR	R ₁ ,R ₂	Divide (SB)	RRE	B30D	
DER	R ₁ ,R ₂	Divide (SH)	RR	3D	
DIDBR	R ₁ ,R ₃ ,R ₂ ,M ₄	Divide to Integer (LB)	RRF-b	B35B	c
DIEBR	R ₁ ,R ₃ ,R ₂ ,M ₄	Divide to Integer (SB)	RRF-b	B353	c
DL	R ₁ ,D ₂ (X ₂ ,B ₂)	Divide Logical (32←64)	RXY-a	E397	N3
DLG	R ₁ ,D ₂ (X ₂ ,B ₂)	Divide Logical (64←128)	RXY-a	E387	N
DLGR	R ₁ ,R ₂	Divide Logical (64←128)	RRE	B987	N
DLR	R ₁ ,R ₂	Divide Logical (32←64)	RRE	B997	N3
DP	D ₁ (L ₁ ,B ₁),D ₂ (L ₂ ,B ₂)	Divide Decimal	SS-b	FD	
DR	R ₁ ,R ₂	Divide (32←64)	RR	1D	
DSG	R ₁ ,D ₂ (X ₂ ,B ₂)	Divide Single (64)	RXY-a	E30D	N
DSGF	R ₁ ,D ₂ (X ₂ ,B ₂)	Divide Single (64←32)	RXY-a	E31D	N
DSGFR	R ₁ ,R ₂	Divide Single (64←32)	RRE	B91D	N
DSGR	R ₁ ,R ₂	Divide Single (64)	RRE	B90D	N
DXBR	R ₁ ,R ₂	Divide (EB)	RRE	B34D	
DXR	R ₁ ,R ₂	Divide (EH)	RRE	B22D	
DXTR	R ₁ ,R ₂ ,R ₃	Divide (ED)	RRF-a	B3D9	TF
DXTRA	R ₁ ,R ₂ ,R ₃ ,M ₄	Divide (ED)	RRF-a	B3D9	F
EAR	R ₁ ,R ₂	Extract Access	RRE	B24F	
ECAG	R ₁ ,R ₃ ,D ₂ (B ₂)	Extract Cache Attribute	RSY-a	EB4C	GE
ECTG	D ₁ (B ₁),D ₂ (B ₂),R ₃	Extract CPU Time	SSF	C81	ET
ED	D ₁ (L ₁ ,B ₁),D ₂ (B ₂)	Edit	SS-a	DE	c
EDMK	D ₁ (L ₁ ,B ₁),D ₂ (B ₂)	Edit and Mark	SS-a	DF	c
EEDTR	R ₁ ,R ₂	Extract Biased Exponent (64←LD)	RRE	B3E5	TF
EEXTR	R ₁ ,R ₂	Extract Biased Exponent (64←ED)	RRE	B3ED	TF
EFPC	R ₁	Extract FPC	RRE	B38C	
EPAIR	R ₁	Extract Primary ASN and Instance	RRE	B99A	q RA
EPAR	R ₁	Extract Primary ASN	RRE	B226	q
EPSW	R ₁ ,R ₂	Extract PSW	RRE	B98D	N3
EREG	R ₁ ,R ₂	Extract Stacked Registers (32)	RRE	B249	
EREGG	R ₁ ,R ₂	Extract Stacked Registers (64)	RRE	B90E	N
ESAIR	R ₁	Extract Secondary ASN and Instance	RRE	B99B	q RA
ESAR	R ₁	Extract Secondary ASN	RRE	B227	q
ESDTR	R ₁ ,R ₂	Extract Significance (64←LD)	RRE	B3E7	TF
ESEA	R ₁ ,R ₂	Extract and Set Extended Authority	RRE	B99D	p N
ESTA	R ₁ ,R ₂	Extract Stacked State	RRE	B24A	c
ESXTR	R ₁ ,R ₂	Extract Significance (64←ED)	RRE	B3EF	TF
EX	R ₁ ,D ₂ (X ₂ ,B ₂)	Execute	RX-a	44	
EXRL	R ₁ ,I ₂	Execute Relative Long	RIL-b	C60	XX
FIDBR	R ₁ ,M ₃ ,R ₂	Load FP Integer (LB)	RRF-e	B35F	
FIDBRA	R ₁ ,M ₃ ,R ₂ ,M ₄	Load FP Integer (LB)	RRF-e	B35F	F
FIDR	R ₁ ,R ₂	Load FP Integer (LH)	RRE	B37F	
FIDTR	R ₁ ,M ₃ ,R ₂ ,M ₄	Load FP Integer (LD)	RRF-e	B3D7	TF
FIEBR	R ₁ ,M ₃ ,R ₂	Load FP Integer (SB)	RRF-e	B357	

Mnemonic	Operands	Name	Format	Op-code	Class & Notes
FIEBRA	R ₁ ,M ₃ ,R ₂ ,M ₄	Load FP Integer (SB)	RRF-e	B357	F
FIER	R ₁ ,R ₂	Load FP Integer (SH)	RRE	B377	
FIXBR	R ₁ ,M ₃ ,R ₂	Load FP Integer (EB)	RRF-e	B347	
FIXBRA	R ₁ ,M ₃ ,R ₂ ,M ₄	Load FP Integer (EB)	RRF-e	B347	F
FIXR	R ₁ ,R ₂	Load FP Integer (EH)	RRE	B367	
FIXTR	R ₁ ,M ₃ ,R ₂ ,M ₄	Load FP Integer (ED)	RRF-e	B3DF	TF
FLOGR	R ₁ ,R ₂	Find Leftmost One	RRE	B983	c EI
HDR	R ₁ ,R ₂	Halve (LH)	RR	24	
HER	R ₁ ,R ₂	Halve (SH)	RR	34	
HSCH		Halt Subchannel	S	B231	p c
IAC	R ₁	Insert Address Space Control	RRE	B224	q c
IC	R ₁ ,D ₂ (X ₂ ,B ₂)	Insert Character	RX-a	43	
ICM	R ₁ ,M ₃ ,D ₂ (B ₂)	Insert Characters under Mask (low)	RS-b	BF	c
ICMH	R ₁ ,M ₃ ,D ₂ (B ₂)	Insert Characters under Mask (high)	RSY-b	EB80	c N
ICMY	R ₁ ,M ₃ ,D ₂ (B ₂)	Insert Characters under Mask (low)	RSY-b	EB81	c LD
ICY	R ₁ ,D ₂ (X ₂ ,B ₂)	Insert Character	RXY-a	E373	LD
IDTE	R ₁ ,R ₃ ,R ₂	Invalidate DAT Table Entry	RRF-b	B98E	p u DE
IEDTR	R ₁ ,R ₃ ,R ₂	Insert Biased Exponent (LD←64 LD)	RRF-b	B3F6	TF
IEXTR	R ₁ ,R ₃ ,R ₂	Insert Biased Exponent (ED←64 ED)	RRF-b	B3FE	TF
IIHF	R ₁ ,I ₂	Insert Immediate (high)	RIL-a	C08	EI
IIHH	R ₁ ,I ₂	Insert Immediate (high high)	RI-a	A50	N
IIHL	R ₁ ,I ₂	Insert Immediate (high low)	RI-a	A51	N
IILF	R ₁ ,I ₂	Insert Immediate (low)	RIL-a	C09	EI
IILH	R ₁ ,I ₂	Insert Immediate (low high)	RI-a	A52	N
IILL	R ₁ ,I ₂	Insert Immediate (low low)	RI-a	A53	N
IPK		Insert PSW Key	S	B20B	q
IPM	R ₁	Insert Program Mask	RRE	B222	
IPTE	R ₁ ,R ₂	Invalidate Page Table Entry	RRF-a	B221	p
ISKE	R ₁ ,R ₂	Insert Storage Key Extended	RRE	B229	p
IVSK	R ₁ ,R ₂	Insert Virtual Storage Key	RRE	B223	q
KDB	R ₁ ,D ₂ (X ₂ ,B ₂)	Compare and Signal (LB)	RXE	ED18	c
KDBR	R ₁ ,R ₂	Compare and Signal (LB)	RRE	B318	c
KDTR	R ₁ ,R ₂	Compare and Signal (LD)	RRE	B3E0	c TF
KEB	R ₁ ,D ₂ (X ₂ ,B ₂)	Compare and Signal (SB)	RXE	ED08	c
KEBR	R ₁ ,R ₂	Compare and Signal (SB)	RRE	B308	c
KIMD	R ₁ ,R ₂	Compute Intermediate Message Digest	RRE	B93E	c MS
KLMD	R ₁ ,R ₂	Compute Last Message Digest	RRE	B93F	c MS
KM	R ₁ ,R ₂	Cipher Message	RRE	B92E	c MS
KMAC	R ₁ ,R ₂	Compute Message Authentication Code	RRE	B91E	c MS
KMC	R ₁ ,R ₂	Cipher Message with Chaining	RRE	B92F	c MS
KMCTR	R ₁ ,R ₃ ,R ₂	Cipher Message with Counter	RRF-b	B92D	c M4
KMF	R ₁ ,R ₂	Cipher Message with CFB	RRE	B92A	c M4
KMO	R ₁ ,R ₂	Cipher Message with OFB	RRE	B92B	c M4
KXBR	R ₁ ,R ₂	Compare and Signal (EB)	RRE	B348	c
KXTR	R ₁ ,R ₂	Compare and Signal (ED)	RRE	B3E8	c TF
L	R ₁ ,D ₂ (X ₂ ,B ₂)	Load (32)	RX-a	58	
LA	R ₁ ,D ₂ (X ₂ ,B ₂)	Load Address	RX-a	41	
LAA	R ₁ ,R ₃ ,D ₂ (B ₂)	Load and Add (32)	RSY-a	EBF8	c IA
LAAG	R ₁ ,R ₃ ,D ₂ (B ₂)	Load and Add (64)	RSY-a	EBE8	c IA
LAAL	R ₁ ,R ₃ ,D ₂ (B ₂)	Load and Add Logical (32)	RSY-a	EBFA	c IA
LAALG	R ₁ ,R ₃ ,D ₂ (B ₂)	Load and Add Logical (64)	RSY-a	EBEA	c IA
LAE	R ₁ ,D ₂ (X ₂ ,B ₂)	Load Address Extended	RX-a	51	
LAEY	R ₁ ,D ₂ (X ₂ ,B ₂)	Load Address Extended	RXY-a	E375	GE
LAM	R ₁ ,R ₃ ,D ₂ (B ₂)	Load Access Multiple	RS-a	9A	
LAMY	R ₁ ,R ₃ ,D ₂ (B ₂)	Load Access Multiple	RSY-a	EB9A	LD
LAN	R ₁ ,R ₃ ,D ₂ (B ₂)	Load and AND (32)	RSY-a	EBF4	c IA
LANG	R ₁ ,R ₃ ,D ₂ (B ₂)	Load and AND (64)	RSY-a	EBE4	c IA
LAO	R ₁ ,R ₃ ,D ₂ (B ₂)	Load and OR (32)	RSY-a	EBF6	c IA
LAOG	R ₁ ,R ₃ ,D ₂ (B ₂)	Load and OR (64)	RSY-a	EBE6	c IA
LARL	R ₁ ,I ₂	Load Address Relative Long	RIL-b	C00	N3

Mnemonic	Operands	Name	Format	Op-code	Class & Notes
LASP	$D_1(B_1), D_2(B_2)$	Load Address Space Parameters	SSE	E500	p c
LAX	$R_1, R_3, D_2(B_2)$	Load and Exclusive OR (32)	RSY-a	EBF7	c IA
LAXG	$R_1, R_3, D_2(B_2)$	Load and Exclusive OR (64)	RSY-a	EBE7	c IA
LAY	$R_1, D_2(X_2, B_2)$	Load Address	RXY-a	E371	LD
LB	$R_1, D_2(X_2, B_2)$	Load Byte (32)	RXY-a	E376	LD
LBH	$R_1, D_2(X_2, B_2)$	Load Byte High (32←8)	RXY-a	E3C0	HW
LBR	R_1, R_2	Load Byte (32)	RRE	B926	EI
LCDBR	R_1, R_2	Load Complement (LB)	RRE	B313	c
LCDFR	R_1, R_2	Load Complement (L)	RRE	B373	FS
LCDR	R_1, R_2	Load Complement (LH)	RR	23	c
LCEBR	R_1, R_2	Load Complement (SB)	RRE	B303	c
LCER	R_1, R_2	Load Complement (SH)	RR	33	c
LCGFR	R_1, R_2	Load Complement (64←32)	RRE	B913	c N
LCGR	R_1, R_2	Load Complement (64)	RRE	B903	c N
LCR	R_1, R_2	Load Complement (32)	RR	13	c
LCTL	$R_1, R_3, D_2(B_2)$	Load Control (32)	RS-a	B7	p
LCTLG	$R_1, R_3, D_2(B_2)$	Load Control (64)	RSY-a	EB2F	p N
LCXBR	R_1, R_2	Load Complement (EB)	RRE	B343	c
LCXR	R_1, R_2	Load Complement (EH)	RRE	B363	c
LD	$R_1, D_2(X_2, B_2)$	Load (L)	RX-a	68	
LDE	$R_1, D_2(X_2, B_2)$	Load Lengthened (LH←SH)	RXE	ED24	
LDEB	$R_1, D_2(X_2, B_2)$	Load Lengthened (LB←SB)	RXE	ED04	
LDEBR	R_1, R_2	Load Lengthened (LB←SB)	RRE	B304	
LDER	R_1, R_2	Load Lengthened (LH←SH)	RRE	B324	
LDETR	R_1, R_2, M_4	Load Lengthened (LD←SD)	RRF-d	B3D4	TF
LDGR	R_1, R_2	Load FPR from GR (L←64)	RRE	B3C1	FG
LDR	R_1, R_2	Load (L)	RR	28	
LDXBR	R_1, R_2	Load Rounded (LB←EB)	RRE	B345	
LDXBRA	R_1, M_3, R_2, M_4	Load Rounded (LB←EB)	RRF-e	B345	F
LDXR	R_1, R_2	Load Rounded (LH←EH)	RR	25	
LDXTR	R_1, M_3, R_2, M_4	Load Rounded (LD←ED)	RRF-e	B3DD	TF
LDY	$R_1, D_2(X_2, B_2)$	Load (L)	RXY-a	ED65	LD
LE	$R_1, D_2(X_2, B_2)$	Load (S)	RX-a	78	
LEDBR	R_1, R_2	Load Rounded (SB←LB)	RRE	B344	
LEDBRA	R_1, M_3, R_2, M_4	Load Rounded (SB←LB)	RRF-e	B344	F
LEDR	R_1, R_2	Load Rounded (SH←LH)	RR	35	
LEDTR	R_1, M_3, R_2, M_4	Load Rounded (SD←LD)	RRF-e	B3D5	TF
LER	R_1, R_2	Load (S)	RR	38	
LEXBR	R_1, R_2	Load Rounded (SB←EB)	RRE	B346	
LEXBRA	R_1, M_3, R_2, M_4	Load Rounded (SB←EB)	RRF-e	B346	F
LEXR	R_1, R_2	Load Rounded (SH←EH)	RRE	B366	
LEY	$R_1, D_2(X_2, B_2)$	Load (S)	RXY-a	ED64	LD
LFAS	$D_2(B_2)$	Load FPC and Signal	S	B2BD	XF
LFH	$R_1, D_2(X_2, B_2)$	Load High (32)	RXY-a	E3CA	HW
LFPC	$D_2(B_2)$	Load FPC	S	B29D	
LG	$R_1, D_2(X_2, B_2)$	Load (64)	RXY-a	E304	N
LGB	$R_1, D_2(X_2, B_2)$	Load Byte (64←8)	RXY-a	E377	LD
LGBR	R_1, R_2	Load Byte (64←8)	RRE	B906	EI
LGDR	R_1, R_2	Load GR from FPR (64←L)	RRE	B3CD	FG
LGf	$R_1, D_2(X_2, B_2)$	Load (64←32)	RXY-a	E314	N
LGFI	R_1, I_2	Load Immediate (64←32)	RIL-a	C01	EI
LGFR	R_1, R_2	Load (64←32)	RRE	B914	N
LGFRl	R_1, I_2	Load Relative Long (64←32)	RIL-b	C4C	GE
LGH	$R_1, D_2(X_2, B_2)$	Load Halfword (64←16)	RXY-a	E315	N
LGHI	R_1, I_2	Load Halfword Immediate (64←16)	RI-a	A79	N
LGHR	R_1, R_2	Load Halfword (64←16)	RRE	B907	EI
LGHRl	R_1, I_2	Load Halfword Relative Long (64←16)	RIL-b	C44	GE
LGOC	$R_1, D_2(B_2), M_3$	Load on Condition (64)	RSY-b	EBE2	CL
LGR	R_1, R_2	Load (64)	RRE	B904	N
LGRL	R_1, I_2	Load Relative Long (64)	RIL-a	C48	GE

Mnemonic	Operands	Name	Format	Op-code	Class & Notes
LGROC	R_1, R_2, M_3	Load on Condition (64)	RRF-c	B9E2	CL
LH	$R_1, D_2(X_2, B_2)$	Load Halfword (32←16)	RX-a	48	
LHH	$R_1, D_2(X_2, B_2)$	Load Halfword High (32←16)	RXY-a	E3C4	HW
LHI	R_1, I_2	Load Halfword Immediate (32←16)	RI-a	A78	
LHR	R_1, R_2	Load Halfword (32←16)	RRE	B927	EI
LHRL	R_1, I_2	Load Halfword Relative Long (32←16)	RIL-b	C45	GE
LHY	$R_1, D_2(X_2, B_2)$	Load Halfword (32←16)	RXY-a	E378	LD
LLC	$R_1, D_2(X_2, B_2)$	Load Logical Character (32←8)	RXY-a	E394	EI
LLCH	$R_1, D_2(X_2, B_2)$	Load Logical Character High (32←8)	RXY-a	E3C2	HW
LLCR	R_1, R_2	Load Logical Character (32←8)	RRE	B994	EI
LLGC	$R_1, D_2(X_2, B_2)$	Load Logical Character (64←8)	RXY-a	E390	N
LLGCR	R_1, R_2	Load Logical Character (64←8)	RRE	B984	EI
LLGF	$R_1, D_2(X_2, B_2)$	Load Logical (64←32)	RXY-a	E316	N
LLGFR	R_1, R_2	Load Logical (64←32)	RRE	B916	N
LLGFRL	R_1, I_2	Load Logical Relative Long (64←32)	RIL-b	C4E	GE
LLGH	$R_1, D_2(X_2, B_2)$	Load Logical Halfword (64←16)	RXY-a	E391	N
LLGHR	R_1, R_2	Load Logical Halfword (64←16)	RRE	B985	EI
LLGHRL	R_1, I_2	Load Logical Halfword Relative Long (64←16)	RIL-b	C46	GE
LLGT	$R_1, D_2(X_2, B_2)$	Load Logical Thirty One Bits (64←31)	RXY-a	E317	N
LLGTR	R_1, R_2	Load Logical Thirty One Bits (64←31)	RRE	B917	N
LLH	$R_1, D_2(X_2, B_2)$	Load Logical Halfword (32←16)	RXY-a	E395	EI
LLHH	$R_1, D_2(X_2, B_2)$	Load Logical Halfword High (32←16)	RXY-a	E3C6	HW
LLHR	R_1, R_2	Load Logical Halfword (32←16)	RRE	B995	EI
LLHRL	R_1, I_2	Load Logical Halfword Relative Long (32←16)	RIL-b	C42	GE
LLIHF	R_1, I_2	Load Logical Immediate (high)	RIL-a	C0E	EI
LLIHH	R_1, I_2	Load Logical Immediate (high high)	RI-a	A5C	N
LLIHL	R_1, I_2	Load Logical Immediate (high low)	RI-a	A5D	N
LLILF	R_1, I_2	Load Logical Immediate (low)	RIL-a	C0F	EI
LLILH	R_1, I_2	Load Logical Immediate (low high)	RI-a	A5E	N
LLILL	R_1, I_2	Load Logical Immediate (low low)	RI-a	A5F	N
LM	$R_1, R_3, D_2(B_2)$	Load Multiple (32)	RS-a	98	
LMD	$R_1, R_3, D_2(B_2), D_4(B_4)$	Load Multiple Disjoint	SS-e	EF	N
LMG	$R_1, R_3, D_2(B_2)$	Load Multiple (64)	RSY-a	EB04	N
LMH	$R_1, R_3, D_2(B_2)$	Load Multiple High	RSY-a	EB96	N
LMY	$R_1, R_3, D_2(B_2)$	Load Multiple (32)	RSY-a	EB98	LD
LNDBR	R_1, R_2	Load Negative (LB)	RRE	B311	c
LNDFR	R_1, R_2	Load Negative (L)	RRE	B371	FS
LNDR	R_1, R_2	Load Negative (LH)	RR	21	c
LNEBR	R_1, R_2	Load Negative (SB)	RRE	B301	c
LNER	R_1, R_2	Load Negative (SH)	RR	31	c
LNGFR	R_1, R_2	Load Negative (64←32)	RRE	B911	c N
LNGR	R_1, R_2	Load Negative (64)	RRE	B901	c N
LNR	R_1, R_2	Load Negative (32)	RR	11	c
LNXBR	R_1, R_2	Load Negative (EB)	RRE	B341	c
LNXR	R_1, R_2	Load Negative (EH)	RRE	B361	c
LOC	$R_1, D_2(B_2), M_3$	Load on Condition (32)	RSY-b	EBF2	CL
LPD	$R_3, D_1(B_1), D_2(B_2)$	Load Pair Disjoint (32)	SSF	C84	c IA
LPDBR	R_1, R_2	Load Positive (LB)	RRE	B310	c
LPDFR	R_1, R_2	Load Positive (L)	RRE	B370	FS
LPDG	$R_3, D_1(B_1), D_2(B_2)$	Load Pair Disjoint (64)	SSF	C85	c IA
LPDR	R_1, R_2	Load Positive (LH)	RR	20	c
LPEBR	R_1, R_2	Load Positive (SB)	RRE	B300	c
LPER	R_1, R_2	Load Positive (SH)	RR	30	c
LPGFR	R_1, R_2	Load Positive (64←32)	RRE	B910	c N
LPGR	R_1, R_2	Load Positive (64)	RRE	B900	c N
LPQ	$R_1, D_2(X_2, B_2)$	Load Pair from Quadword	RXY-a	E38F	N
LPR	R_1, R_2	Load Positive (32)	RR	10	c
LPSW	$D_2(B_2)$	Load PSW	S	82	p n

Mnemonic	Operands	Name	Format	Op-code	Class & Notes
LPSWE	D ₂ (B ₂)	Load PSW Extended	S	B2B2	p n N
LPTEA	R ₁ ,R ₃ ,R ₂ ,M ₄	Load Page-Table-Entry Address	RRF-b	B9AA	c D2
LPXBR	R ₁ ,R ₂	Load Positive (EB)	RRE	B340	c
LPXR	R ₁ ,R ₂	Load Positive (EH)	RRE	B360	c
LR	R ₁ ,R ₂	Load (32)	RR	18	
LRA	R ₁ ,D ₂ (X ₂ ,B ₂)	Load Real Address (32)	RX-a	B1	p c
LRAG	R ₁ ,D ₂ (X ₂ ,B ₂)	Load Real Address (64)	RXY-a	E303	p c N
LRAY	R ₁ ,D ₂ (X ₂ ,B ₂)	Load Real Address (32)	RXY-a	E313	p c LD
LRDR	R ₁ ,R ₂	Load Rounded (LH←EH)	RR	25	
LRER	R ₁ ,R ₂	Load Rounded (SH←LH)	RR	35	
LRL	R ₁ ,I ₂	Load Relative Long (32)	RIL-b	C4D	GE
LROC	R ₁ ,R ₂ ,M ₃	Load on Condition (32)	RRF-c	B9F2	CL
LRV	R ₁ ,D ₂ (X ₂ ,B ₂)	Load Reversed (32)	RXY-a	E31E	N3
LRVG	R ₁ ,D ₂ (X ₂ ,B ₂)	Load Reversed (64)	RXY-a	E30F	N
LRVGR	R ₁ ,R ₂	Load Reversed (64)	RRE	B90F	N
LRVH	R ₁ ,D ₂ (X ₂ ,B ₂)	Load Reversed (16)	RXY-a	E31F	N3
LRVR	R ₁ ,R ₂	Load Reversed (32)	RRE	B91F	N3
LT	R ₁ ,D ₂ (X ₂ ,B ₂)	Load and Test (32)	RXY-a	E312	c EI
LTDBR	R ₁ ,R ₂	Load and Test (LB)	RRE	B312	c
LTDR	R ₁ ,R ₂	Load and Test (LH)	RR	22	c
LTDTL	R ₁ ,R ₂	Load and Test (LD)	RRE	B3D6	c TF
LTEBR	R ₁ ,R ₂	Load and Test (SB)	RRE	B302	c
LTFR	R ₁ ,R ₂	Load and Test (SH)	RR	32	c
LTG	R ₁ ,D ₂ (X ₂ ,B ₂)	Load and Test (64)	RXY-a	E302	c EI
LTGF	R ₁ ,D ₂ (X ₂ ,B ₂)	Load And Test (64←32)	RXY-a	E332	c GE
LTGFR	R ₁ ,R ₂	Load and Test (64←32)	RRE	B912	c N
LTGR	R ₁ ,R ₂	Load and Test (64)	RRE	B902	c N
LTR	R ₁ ,R ₂	Load and Test (32)	RR	12	c
LTXBR	R ₁ ,R ₂	Load and Test (EB)	RRE	B342	c
LTXR	R ₁ ,R ₂	Load and Test (EH)	RRE	B362	c
LTXTR	R ₁ ,R ₂	Load and Test (ED)	RRE	B3DE	c TF
LURA	R ₁ ,R ₂	Load Using Real Address (32)	RRE	B24B	p
LURAG	R ₁ ,R ₂	Load Using Real Address (64)	RRE	B905	p N
LXD	R ₁ ,D ₂ (X ₂ ,B ₂)	Load Lengthened (EH←LH)	RXE	ED25	
LXDB	R ₁ ,D ₂ (X ₂ ,B ₂)	Load Lengthened (EB←LB)	RXE	ED05	
LXDBR	R ₁ ,R ₂	Load Lengthened (EB←LB)	RRE	B305	
LXDR	R ₁ ,R ₂	Load Lengthened (EH←LH)	RRE	B325	
LXDTR	R ₁ ,R ₂ ,M ₄	Load Lengthened (ED←LD)	RRF-d	B3DC	TF
LXE	R ₁ ,D ₂ (X ₂ ,B ₂)	Load Lengthened (EH←SH)	RXE	ED26	
LXEB	R ₁ ,D ₂ (X ₂ ,B ₂)	Load Lengthened (EB←SB)	RXE	ED06	
LXEBr	R ₁ ,R ₂	Load Lengthened (EB←SB)	RRE	B306	
LXER	R ₁ ,R ₂	Load Lengthened (EH←SH)	RRE	B326	
LXR	R ₁ ,R ₂	Load (E)	RRE	B365	
LY	R ₁ ,D ₂ (X ₂ ,B ₂)	Load (32)	RXY-a	E358	LD
LZDR	R ₁	Load Zero (L)	RRE	B375	
LZER	R ₁	Load Zero (S)	RRE	B374	
LZXR	R ₁	Load Zero (E)	RRE	B376	
M	R ₁ ,D ₂ (X ₂ ,B ₂)	Multiply (64←32)	RX-a	5C	
MAD	R ₁ ,R ₃ ,D ₂ (X ₂ ,B ₂)	Multiply and Add (LH)	RXF	ED3E	HM
MADB	R ₁ ,R ₃ ,D ₂ (X ₂ ,B ₂)	Multiply and Add (LB)	RXF	ED1E	
MADBR	R ₁ ,R ₃ ,R ₂	Multiply and Add (LB)	RRD	B31E	
MADR	R ₁ ,R ₃ ,R ₂	Multiply and Add (LH)	RRD	B33E	HM
MAE	R ₁ ,R ₃ ,D ₂ (X ₂ ,B ₂)	Multiply and Add (SH)	RXF	ED2E	HM
MAEB	R ₁ ,R ₃ ,D ₂ (X ₂ ,B ₂)	Multiply and Add (SB)	RXF	ED0E	
MAEBR	R ₁ ,R ₃ ,R ₂	Multiply and Add (SB)	RRD	B30E	
MAER	R ₁ ,R ₃ ,R ₂	Multiply and Add (SH)	RRD	B32E	HM
MAY	R ₁ ,R ₃ ,D ₂ (X ₂ ,B ₂)	Multiply and Add Unnormalized (EH←LH)	RXF	ED3A	UE
MAYH	R ₁ ,R ₃ ,D ₂ (X ₂ ,B ₂)	Multiply and Add Unnormalized (EH _H ←LH)	RXF	ED3C	UE
MAYHR	R ₁ ,R ₃ ,R ₂	Multiply and Add Unnormalized (EH _H ←LH)	RRD	B33C	UE
MAYL	R ₁ ,R ₃ ,D ₂ (X ₂ ,B ₂)	Multiply and Add Unnormalized (EH _L ←LH)	RXF	ED38	UE

Mnemonic	Operands	Name	Format	Op-code	Class & Notes
MAYLR	R_1, R_3, R_2	Multiply and Add Unnormalized ($EH_L \leftarrow LH$)	RRD	B338	UE
MAYR	R_1, R_3, R_2	Multiply and Add Unnormalized ($EH \leftarrow LH$)	RRD	B33A	UE
MC	$D_1(B_1), I_2$	Monitor Call	SI	AF	
MD	$R_1, D_2(X_2, B_2)$	Multiply (LH)	RX-a	6C	
MDB	$R_1, D_2(X_2, B_2)$	Multiply (LB)	RXE	ED1C	
MDBR	R_1, R_2	Multiply (LB)	RRE	B31C	
MDE	$R_1, D_2(X_2, B_2)$	Multiply (LH \leftarrow SH)	RX-a	7C	
MDEB	$R_1, D_2(X_2, B_2)$	Multiply (LB \leftarrow SB)	RXE	ED0C	
MDEBR	R_1, R_2	Multiply (LB \leftarrow SB)	RRE	B30C	
MDER	R_1, R_2	Multiply (LH \leftarrow SH)	RR	3C	
MDR	R_1, R_2	Multiply (LH)	RR	2C	
MDTR	R_1, R_2, R_3	Multiply (LD)	RRF-a	B3D0	TF
MDTRA	R_1, R_2, R_3, M_4	Multiply (LD)	RRF-a	B3D0	F
ME	$R_1, D_2(X_2, B_2)$	Multiply (LH \leftarrow SH)	RX-a	7C	
MEE	$R_1, D_2(X_2, B_2)$	Multiply (SH)	RXE	ED37	
MEEB	$R_1, D_2(X_2, B_2)$	Multiply (SB)	RXE	ED17	
MEEBR	R_1, R_2	Multiply (SB)	RRE	B317	
MEER	R_1, R_2	Multiply (SH)	RRE	B337	
MER	R_1, R_2	Multiply (LH \leftarrow SH)	RR	3C	
MFY	$R_1, D_2(X_2, B_2)$	Multiply	RXY-a	E35C	GE
MGHI	R_1, I_2	Multiply Halfword Immediate (64 \leftarrow 16)	RI-a	A7D	N
MH	$R_1, D_2(X_2, B_2)$	Multiply Halfword (32 \leftarrow 16)	RX-a	4C	
MHI	R_1, I_2	Multiply Halfword Immediate (32 \leftarrow 16)	RI-a	A7C	
MHY	$R_1, D_2(X_2, B_2)$	Multiply Halfword	RXY-a	E37C	GE
ML	$R_1, D_2(X_2, B_2)$	Multiply Logical (64 \leftarrow 32)	RXY-a	E396	N3
MLG	$R_1, D_2(X_2, B_2)$	Multiply Logical (128 \leftarrow 64)	RXY-a	E386	N
MLGR	R_1, R_2	Multiply Logical (128 \leftarrow 64)	RRE	B986	N
MLR	R_1, R_2	Multiply Logical (64 \leftarrow 32)	RRE	B996	N3
MP	$D_1(L_1, B_1), D_2(L_2, B_2)$	Multiply Decimal	SS-b	FC	
MR	R_1, R_2	Multiply (64 \leftarrow 32)	RR	1C	
MS	$R_1, D_2(X_2, B_2)$	Multiply Single (32)	RX-a	71	
MSCH	$D_2(B_2)$	Modify Subchannel	S	B232	p c
MSD	$R_1, R_3, D_2(X_2, B_2)$	Multiply and Subtract (LH)	RXF	ED3F	HM
MSDB	$R_1, R_3, D_2(X_2, B_2)$	Multiply and Subtract (LB)	RXF	ED1F	
MSDBR	R_1, R_3, R_2	Multiply and Subtract (LB)	RRD	B31F	
MSDR	R_1, R_3, R_2	Multiply and Subtract (LH)	RRD	B33F	HM
MSE	$R_1, R_3, D_2(X_2, B_2)$	Multiply and Subtract (SH)	RXF	ED2F	HM
MSEB	$R_1, R_3, D_2(X_2, B_2)$	Multiply and Subtract (SB)	RXF	ED0F	
MSEBR	R_1, R_3, R_2	Multiply and Subtract (SB)	RRD	B30F	
MSER	R_1, R_3, R_2	Multiply and Subtract (SH)	RRD	B32F	HM
MSFI	R_1, I_2	Multiply Single Immediate	RIL-a	C21	GE
MSG	$R_1, D_2(X_2, B_2)$	Multiply Single (64)	RXY-a	E30C	N
MSGF	$R_1, D_2(X_2, B_2)$	Multiply Single (64 \leftarrow 32)	RXY-a	E31C	N
MSGFI	R_1, I_2	Multiply Single Immediate	RIL-a	C20	GE
MSGFR	R_1, R_2	Multiply Single (64 \leftarrow 32)	RRE	B91C	N
MSGR	R_1, R_2	Multiply Single (64)	RRE	B90C	N
MSR	R_1, R_2	Multiply Single (32)	RRE	B252	
MSTA	R_1	Modify Stacked State	RRE	B247	
MSY	$R_1, D_2(X_2, B_2)$	Multiply Single (32)	RXY-a	E351	LD
MVC	$D_1(L, B_1), D_2(B_2)$	Move (character)	SS-a	D2	
MVCDK	$D_1(B_1), D_2(B_2)$	Move with Destination key	SSE	E50F	q
MVCIN	$D_1(L, B_1), D_2(B_2)$	Move Inverse	SS-a	E8	
MVCK	$D_1(R_1, B_1), D_2(B_2), R_3$	Move with Key	SS-d	D9	q c
MVCL	R_1, R_2	Move Long	RR	0E	i c
MVCLE	$R_1, R_3, D_2(B_2)$	Move Long Extended	RS-a	A8	c
MVCLU	$R_1, R_3, D_2(B_2)$	Move Long Unicode	RSY-a	EB8E	c E2
MVCOS	$D_1(B_1), D_2(B_2), R_3$	Move with Optional Specifications	SSF	C80	q c MO
MVCP	$D_1(R_1, B_1), D_2(B_2), R_3$	Move to Primary	SS-d	DA	q c
MVCS	$D_1(R_1, B_1), D_2(B_2), R_3$	Move to Secondary	SS-d	DB	q c
MVCSK	$D_1(B_1), D_2(B_2)$	Move with Source Key	SSE	E50E	q

Mnemonic	Operands	Name	Format	Op-code	Class & Notes
MVGH	D ₁ (B ₁),I ₂	Move (64←16)	SIL	E548	GE
MVHH	D ₁ (B ₁),I ₂	Move (16←16)	SIL	E544	GE
MVHI	D ₁ (B ₁),I ₂	Move (32←16)	SIL	E54C	GE
MVI	D ₁ (B ₁),I ₂	Move Immediate	SI	92	
MVIY	D ₁ (B ₁),I ₂	Move Immediate	SIY	EB52	LD
MVN	D ₁ (L ₁ ,B ₁),D ₂ (B ₂)	Move Numerics	SS-a	D1	
MVO	D ₁ (L ₁ ,B ₁),D ₂ (L ₂ ,B ₂)	Move with Offset	SS-b	F1	
MVPG	R ₁ ,R ₂	Move Page	RRE	B254	q c
MVST	R ₁ ,R ₂	Move String	RRE	B255	c
MVZ	D ₁ (L ₁ ,B ₁),D ₂ (B ₂)	Move Zones	SS-a	D3	
MXBR	R ₁ ,R ₂	Multiply (EB)	RRE	B34C	
MXD	R ₁ ,D ₂ (X ₂ ,B ₂)	Multiply (EH←LH)	RX-a	67	
MXDB	R ₁ ,D ₂ (X ₂ ,B ₂)	Multiply (EB←LB)	RXE	ED07	
MXDBR	R ₁ ,R ₂	Multiply (EB←LB)	RRE	B307	
MXDR	R ₁ ,R ₂	Multiply (EH←LH)	RR	27	
MXR	R ₁ ,R ₂	Multiply (EH)	RR	26	
MXTR	R ₁ ,R ₂ ,R ₃	Multiply (ED)	RRF-a	B3D8	TF
MXTRA	R ₁ ,R ₂ ,R ₃ ,M ₄	Multiply (ED)	RRF-a	B3D8	F
MY	R ₁ ,R ₃ ,D ₂ (X ₂ ,B ₂)	Multiply Unnormalized (EH←LH)	RXF	ED3B	UE
MYH	R ₁ ,R ₃ ,D ₂ (X ₂ ,B ₂)	Multiply Unnormalized (EH _H ←LH)	RXF	ED3D	UE
MYHR	R ₁ ,R ₃ ,R ₂	Multiply Unnormalized (EH _H ←LH)	RRD	B33D	UE
MYL	R ₁ ,R ₃ ,D ₂ (X ₂ ,B ₂)	Multiply Unnormalized (EH _L ←LH)	RXF	ED39	UE
MYLR	R ₁ ,R ₃ ,R ₂	Multiply Unnormalized (EH _L ←LH)	RRD	B339	UE
MYR	R ₁ ,R ₃ ,R ₂	Multiply Unnormalized (EH←LH)	RRD	B33B	UE
N	R ₁ ,D ₂ (X ₂ ,B ₂)	AND (32)	RX-a	54	c
NC	D ₁ (L ₁ ,B ₁),D ₂ (B ₂)	AND (character)	SS-a	D4	c
NG	R ₁ ,D ₂ (X ₂ ,B ₂)	AND (64)	RXY-a	E380	c N
NGR	R ₁ ,R ₂	AND (64)	RRE	B980	c N
NGRK	R ₁ ,R ₂ ,R ₃	AND (64)	RRF-a	B9E4	c DO
NI	D ₁ (B ₁),I ₂	AND Immediate	SI	94	c
NIHF	R ₁ ,I ₂	AND Immediate (high)	RIL-a	C0A	c EI
NIHH	R ₁ ,I ₂	AND Immediate (high high)	RI-a	A54	c N
NIHL	R ₁ ,I ₂	AND Immediate (high low)	RI-a	A55	c N
NILF	R ₁ ,I ₂	AND Immediate (low)	RIL-a	C0B	c EI
NILH	R ₁ ,I ₂	AND Immediate (low high)	RI-a	A56	c N
NILL	R ₁ ,I ₂	AND Immediate (low low)	RI-a	A57	c N
NIY	D ₁ (B ₁),I ₂	AND Immediate	SIY	EB54	c LD
NR	R ₁ ,R ₂	AND (32)	RR	14	c
NRK	R ₁ ,R ₂ ,R ₃	AND (32)	RRF-a	B9F4	c DO
NY	R ₁ ,D ₂ (X ₂ ,B ₂)	AND (32)	RXY-a	E354	c LD
O	R ₁ ,D ₂ (X ₂ ,B ₂)	OR (32)	RX-a	56	c
OC	D ₁ (L ₁ ,B ₁),D ₂ (B ₂)	OR (character)	SS-a	D6	c
OG	R ₁ ,D ₂ (X ₂ ,B ₂)	OR (64)	RXY-a	E381	c N
OGR	R ₁ ,R ₂	OR (64)	RRE	B981	c N
OGRK	R ₁ ,R ₂ ,R ₃	OR (64)	RRF-a	B9E6	c DO
OI	D ₁ (B ₁),I ₂	OR Immediate	SI	96	c
OIHF	R ₁ ,I ₂	OR Immediate (high)	RIL-a	C0C	c EI
OIHH	R ₁ ,I ₂	OR Immediate (high high)	RI-a	A58	c N
OIHL	R ₁ ,I ₂	OR Immediate (high low)	RI-a	A59	c N
OILF	R ₁ ,I ₂	OR Immediate (low)	RIL-a	C0D	c EI
OILH	R ₁ ,I ₂	OR Immediate (low high)	RI-a	A5A	c N
OILL	R ₁ ,I ₂	OR Immediate (low low)	RI-a	A5B	c N
OIY	D ₁ (B ₁),I ₂	OR Immediate	SIY	EB56	c LD
OR	R ₁ ,R ₂	OR (32)	RR	16	c
ORK	R ₁ ,R ₂ ,R ₃	OR (32)	RRF-a	B9F6	c DO
OY	R ₁ ,D ₂ (X ₂ ,B ₂)	OR (32)	RXY-a	E356	c LD
PACK	D ₁ (L ₁ ,B ₁),D ₂ (L ₂ ,B ₂)	Pack	SS-b	F2	
PALB		Purge ALB	RRE	B248	p
PC	D ₂ (B ₂)	Program Call	S	B218	q
PCC		Perform Cryptographic Computation	RRE	B92C	c M4

Mnemonic	Operands	Name	Format	Op-code	Class & Notes
PCKMO		Perform Crypto. Key Mgmt. Operations	RRE	B928	M3
PFDF	$M_1, D_2(X_2, B_2)$	Prefetch Data	RXY-b	E336	GE
PFDR	M_1, I_2	Prefetch Data Relative Long	RIL-c	C62	GE
PFMF	R_1, R_2	Perform Frame Management Function	RRE	B9AF	p ED
PFPO		Perform Floating-Point Operation	E	010A	PF
PGIN	R_1, R_2	Page In	RRE	B22E	p c ES
PGOUT	R_1, R_2	Page Out	RRE	B22F	p c ES
PKA	$D_1(B_1), D_2(L_2, B_2)$	Pack ASCII	SS-f	E9	E2
PKU	$D_1(B_1), D_2(L_2, B_2)$	Pack Unicode	SS-f	E1	E2
PLO	$R_1, D_2(B_2), R_3, D_4(B_4)$	Perform Locked Operation	SS-e	EE	c
POPCNT	R_1, R_2	Population Count	RRE	B9E1	c PK
PR		Program Return	E	0101	q n
PT	R_1, R_2	Program Transfer	RRE	B228	q
PTF	R_1	Perform Topology Function	RRE	B9A2	c p CT
PTFF		Perform Timing-Facility Function	E	0104	q c
PTI	R_1, R_2	Program Transfer with Instance	RRE	B99E	q RA
PTLB		Purge TLB	S	B20D	p
QADTR	R_1, R_3, R_2, M_4	Quantize (LD)	RRF-b	B3F5	TF
QAXTR	R_1, R_3, R_2, M_4	Quantize (ED)	RRF-b	B3FD	TF
RCHP		Reset Channel Path	S	B23B	p c
RISBG	R_1, R_2, I_3, I_4, I_5	Rotate then Insert Selected Bits	RIE-e	EC55	c GE
RISBHG	R_1, I_2, I_3, I_4, I_5	Rotate then Insert Selected Bits High	RIE-f	EC5D	HW
RISBLG	R_1, I_2, I_3, I_4, I_5	Rotate then Insert Selected Bits Low	RIE-f	EC51	HW
RLL	$R_1, R_3, D_2(B_2)$	Rotate Left Single Logical (32)	RSY-a	EB1D	N3
RLLG	$R_1, R_3, D_2(B_2)$	Rotate Left Single Logical (64)	RSY-a	EB1C	N
RNSBG	R_1, R_2, I_3, I_4, I_5	Rotate then AND Selected Bits	RIE-e	EC54	c GE
ROSBG	R_1, R_2, I_3, I_4, I_5	Rotate then OR Selected Bits	RIE-e	EC56	c GE
RP	$D_2(B_2)$	Resume Program	S	B277	q n
RRBE	R_1, R_2	Reset Reference Bit Extended	RRE	B22A	p c
RRBM	R_1, R_2	Reset Reference Bits Multiple	RRE	B9AE	RB
RRDTR	R_1, R_3, R_2, M_4	Reround (LD)	RRF-b	B3F7	TF
RRXTR	R_1, R_3, R_2, M_4	Reround (ED)	RRF-b	B3FF	TF
RSCH		Resume Subchannel	S	B238	p c
RXSBG	R_1, R_2, I_3, I_4, I_5	Rotate then Exclusive OR Selected Bits	RIE-e	EC57	c GE
S	$R_1, D_2(X_2, B_2)$	Subtract (32)	RX-a	5B	c
SAC	$D_2(B_2)$	Set Address Space Control	S	B219	q
SACF	$D_2(B_2)$	Set Address Space Control Fast	S	B279	q
SAL		Set Address Limit	S	B237	p
SAM24		Set Addressing Mode (24)	E	010C	N3
SAM31		Set Addressing Mode (31)	E	010D	N3
SAM64		Set Addressing Mode (64)	E	010E	N
SAR	R_1, R_2	Set Access	RRE	B24E	
SCHM		Set Channel Monitor	S	B23C	p
SCK	$D_2(B_2)$	Set Clock	S	B204	p c
SCKC	$D_2(B_2)$	Set Clock Comparator	S	B206	p
SCKPF		Set Clock Programmable Field	E	0107	p
SD	$R_1, D_2(X_2, B_2)$	Subtract Normalized (LH)	RX-a	6B	c
SDB	$R_1, D_2(X_2, B_2)$	Subtract (LB)	RXE	ED1B	c
SDBR	R_1, R_2	Subtract (LB)	RRE	B31B	c
SDR	R_1, R_2	Subtract Normalized (LH)	RR	2B	c
SDTR	R_1, R_2, R_3	Subtract (LD)	RRF-a	B3D3	c TF
SDTRA	R_1, R_2, R_3, M_4	Subtract (LD)	RRF-a	B3D3	c F
SE	$R_1, D_2(X_2, B_2)$	Subtract Normalized (SH)	RX-a	7B	c
SEB	$R_1, D_2(X_2, B_2)$	Subtract (SB)	RXE	ED0B	c
SEBR	R_1, R_2	Subtract (SB)	RRE	B30B	c
SER	R_1, R_2	Subtract Normalized (SH)	RR	3B	c
SFASR	R_1	Set FPC and Signal	RRE	B385	XF
SFPC	R_1	Set FPC	RRE	B384	
SG	$R_1, D_2(X_2, B_2)$	Subtract (64)	RXY-a	E309	c N
SGF	$R_1, D_2(X_2, B_2)$	Subtract (64←32)	RXY-a	E319	c N
SGFR	R_1, R_2	Subtract (64←32)	RRE	B919	c N

Mnemonic	Operands	Name	Format	Op-code	Class & Notes
SGR	R ₁ ,R ₂	Subtract (64)	RRE	B909	c N
SGRK	R ₁ ,R ₂ ,R ₃	Subtract (64)	RRF-a	B9E9	c DO
SH	R ₁ ,D ₂ (X ₂ ,B ₂)	Subtract Halfword (32←16)	RX-a	4B	c
SHHHR	R ₁ ,R ₂ ,R ₃	Subtract High (32)	RRF-a	B9C9	c HW
SHHLR	R ₁ ,R ₂ ,R ₃	Subtract High (32)	RRF-a	B9D9	c HW
SHY	R ₁ ,D ₂ (X ₂ ,B ₂)	Subtract Halfword (32←16)	RXY-a	E37B	c LD
SIE	D ₂ (B ₂)	Start Interpretive Execution	S	B214	i p
SIGP	R ₁ ,R ₃ ,D ₂ (B ₂)	Signal Processor	RS-a	AE	p c
SL	R ₁ ,D ₂ (X ₂ ,B ₂)	Subtract Logical (32)	RX-a	5F	c
SLA	R ₁ ,D ₂ (B ₂)	Shift Left Single (32)	RS-a	8B	c
SLAG	R ₁ ,R ₃ ,D ₂ (B ₂)	Shift Left Single (64)	RSY-a	EB0B	c N
SLAK	R ₁ ,R ₃ ,D ₂ (B ₂)	Shift Left Single (32)	RSY-a	EBDD	c DO
SLB	R ₁ ,D ₂ (X ₂ ,B ₂)	Subtract Logical with Borrow (32)	RXY-a	E399	c N3
SLBG	R ₁ ,D ₂ (X ₂ ,B ₂)	Subtract Logical with Borrow (64)	RXY-a	E389	c N
SLBGR	R ₁ ,R ₂	Subtract Logical with Borrow (64)	RRE	B989	c N
SLBR	R ₁ ,R ₂	Subtract Logical with Borrow (32)	RRE	B999	c N3
SLDA	R ₁ ,D ₂ (B ₂)	Shift Left Double (64)	RS-a	8F	c
SLDL	R ₁ ,D ₂ (B ₂)	Shift Left Double Logical (64)	RS-a	8D	
SLDT	R ₁ ,R ₃ ,D ₂ (X ₂ ,B ₂)	Shift Significand Left (LD)	RXF	ED40	TF
SLFI	R ₁ ,I ₂	Subtract Logical Immediate (32)	RIL-a	C25	c EI
SLG	R ₁ ,D ₂ (X ₂ ,B ₂)	Subtract Logical (64)	RXY-a	E30B	c N
SLGF	R ₁ ,D ₂ (X ₂ ,B ₂)	Subtract Logical (64←32)	RXY-a	E31B	c N
SLGFI	R ₁ ,I ₂	Subtract Logical Immediate (64←32)	RIL-a	C24	c EI
SLGFR	R ₁ ,R ₂	Subtract Logical (64←32)	RRE	B91B	c N
SLGR	R ₁ ,R ₂	Subtract Logical (64)	RRE	B90B	c N
SLGRK	R ₁ ,R ₂ ,R ₃	Subtract Logical (64)	RRF-a	B9EB	c DO
SLHHHR	R ₁ ,R ₂ ,R ₃	Subtract Logical High (32)	RRF-a	B9CB	c HW
SLHHLR	R ₁ ,R ₂ ,R ₃	Subtract Logical High (32)	RRF-a	B9DB	c HW
SLL	R ₁ ,D ₂ (B ₂)	Shift Left Single Logical (32)	RS-a	89	
SLLG	R ₁ ,R ₃ ,D ₂ (B ₂)	Shift Left Single Logical (64)	RSY-a	EB0D	N
SLLK	R ₁ ,R ₃ ,D ₂ (B ₂)	Shift Left Single Logical (32)	RSY-a	EBDF	DO
SLR	R ₁ ,R ₂	Subtract Logical (32)	RR	1F	c
SLRK	R ₁ ,R ₂ ,R ₃	Subtract Logical (32)	RRF-a	B9FB	c DO
SLXT	R ₁ ,R ₃ ,D ₂ (X ₂ ,B ₂)	Shift Significand Left (ED)	RXF	ED48	TF
SLY	R ₁ ,D ₂ (X ₂ ,B ₂)	Subtract Logical (32)	RXY-a	E35F	c LD
SP	D ₁ (L ₁ ,B ₁),D ₂ (L ₂ ,B ₂)	Subtract Decimal	SS-b	FB	c
SPKA	D ₂ (B ₂)	Set PSW Key from Address	S	B20A	q
SPM	R ₁	Set Program Mask	RR	04	n
SPT	D ₂ (B ₂)	Set CPU Timer	S	B208	p
SPX	D ₂ (B ₂)	Set Prefix	S	B210	p
SQD	R ₁ ,D ₂ (X ₂ ,B ₂)	Square Root (LH)	RXE	ED35	
SQDB	R ₁ ,D ₂ (X ₂ ,B ₂)	Square Root (LB)	RXE	ED15	
SQDBR	R ₁ ,R ₂	Square Root (LB)	RRE	B315	
SQDR	R ₁ ,R ₂	Square Root (LH)	RRE	B244	
SQE	R ₁ ,D ₂ (X ₂ ,B ₂)	Square Root (SH)	RXE	ED34	
SQEB	R ₁ ,D ₂ (X ₂ ,B ₂)	Square Root (SB)	RXE	ED14	
SQEBR	R ₁ ,R ₂	Square Root (SB)	RRE	B314	
SQER	R ₁ ,R ₂	Square Root (SH)	RRE	B245	
SQXBR	R ₁ ,R ₂	Square Root (EB)	RRE	B316	
SQXR	R ₁ ,R ₂	Square Root (EH)	RRE	B336	
SR	R ₁ ,R ₂	Subtract (32)	RR	1B	c
SRA	R ₁ ,D ₂ (B ₂)	Shift Right Single (32)	RS-a	8A	c
SRAG	R ₁ ,R ₃ ,D ₂ (B ₂)	Shift Right Single (64)	RSY-a	EB0A	c N
SRAK	R ₁ ,R ₃ ,D ₂ (B ₂)	Shift Right Single (32)	RSY-a	EBDC	c DO
SRDA	R ₁ ,D ₂ (B ₂)	Shift Right Double (64)	RS-a	8E	c
SRDL	R ₁ ,D ₂ (B ₂)	Shift Right Double Logical (64)	RS-a	8C	
SRDT	R ₁ ,R ₃ ,D ₂ (X ₂ ,B ₂)	Shift Significand Right (LD)	RXF	ED41	TF
SRK	R ₁ ,R ₂ ,R ₃	Subtract (32)	RRF-a	B9F9	c DO
SRL	R ₁ ,D ₂ (B ₂)	Shift Right Single Logical (32)	RS-a	88	
SRLG	R ₁ ,R ₃ ,D ₂ (B ₂)	Shift Right Single Logical (64)	RSY-a	EB0C	N

Mnemonic	Operands	Name	Format	Op-code	Class & Notes
SRLK	R ₁ ,R ₃ ,D ₂ (B ₂)	Shift Right Single Logical (32)	RSY-a	EBDE	DO
SRNM	D ₂ (B ₂)	Set BFP Rounding Mode	S	B299	
SRNMB	D ₂ (B ₂)	Set BFP Rounding Mode	S	B2B8	F
SRNMT	D ₂ (B ₂)	Set DFP Rounding Mode	S	B2B9	TR
SRP	D ₁ (L ₁ ,B ₁),D ₂ (B ₂),I ₃	Shift and Round Decimal	SS-c	F0	c
SRST	R ₁ ,R ₂	Search String	RRE	B25E	c
SRSTU	R ₁ ,R ₂	Search String Unicode	RRE	B9BE	c E3
SRXT	R ₁ ,R ₃ ,D ₂ (X ₂ ,B ₂)	Shift Significand Right (ED)	RXF	ED49	TF
SSAIR	R ₁	Set Secondary ASN with Instance	RRE	B99F	RA
SSAR	R ₁	Set Secondary ASN	RRE	B225	
SSCH	D ₂ (B ₂)	Start Subchannel	S	B233	p c
SSKE	R ₁ ,R ₂ [,M ₃]	Set Storage Key Extended	RRF-d	B22B	p c
SSM	D ₂ (B ₂)	Set System Mask	S	80	p
ST	R ₁ ,D ₂ (X ₂ ,B ₂)	Store (32)	RX-a	50	
STAM	R ₁ ,R ₃ ,D ₂ (B ₂)	Store Access Multiple	RS-a	9B	
STAMY	R ₁ ,R ₃ ,D ₂ (B ₂)	Store Access Multiple	RSY-a	EB9B	LD
STAP	D ₂ (B ₂)	Store CPU Address	S	B212	p
STC	R ₁ ,D ₂ (X ₂ ,B ₂)	Store Character	RX-a	42	
STCH	R ₁ ,D ₂ (X ₂ ,B ₂)	Store Character High (8)	RXY-a	E3C3	HW
STCK	D ₂ (B ₂)	Store Clock	S	B205	c
STCKC	D ₂ (B ₂)	Store Clock Comparator	S	B207	p
STCKE	D ₂ (B ₂)	Store Clock Extended	S	B278	c
STCKF	D ₂ (B ₂)	Store Clock Fast	S	B27C	c SC
STCM	R ₁ ,M ₃ ,D ₂ (B ₂)	Store Characters under Mask (low)	RS-b	BE	
STCMH	R ₁ ,M ₃ ,D ₂ (B ₂)	Store Characters under Mask (high)	RSY-b	EB2C	N
STCMY	R ₁ ,M ₃ ,D ₂ (B ₂)	Store Characters under Mask (low)	RSY-b	EB2D	LD
STCPS	D ₂ (B ₂)	Store Channel Path Status	S	B23A	p
STCRW	D ₂ (B ₂)	Store Channel Report Word	S	B239	p c
STCTG	R ₁ ,R ₃ ,D ₂ (B ₂)	Store Control (64)	RSY-a	EB25	p N
STCTL	R ₁ ,R ₃ ,D ₂ (B ₂)	Store Control (32)	RS-a	B6	p
STCY	R ₁ ,D ₂ (X ₂ ,B ₂)	Store Character	RXY-a	E372	LD
STD	R ₁ ,D ₂ (X ₂ ,B ₂)	Store (L)	RX-a	60	
STDY	R ₁ ,D ₂ (X ₂ ,B ₂)	Store (L)	RXY-a	ED67	LD
STE	R ₁ ,D ₂ (X ₂ ,B ₂)	Store (S)	RX-a	70	
STEY	R ₁ ,D ₂ (X ₂ ,B ₂)	Store (S)	RXY-a	ED66	LD
STFH	R ₁ ,D ₂ (X ₂ ,B ₂)	Store High (32)	RXY-a	E3CB	HW
STFL	D ₂ (B ₂)	Store Facility List	S	B2B1	p N3
STFLE	D ₂ (B ₂)	Store Facility List Extended	S	B2B0	c FL
STFPC	D ₂ (B ₂)	Store FPC	S	B29C	
STG	R ₁ ,D ₂ (X ₂ ,B ₂)	Store (64)	RXY-a	E324	N
STGOC	R ₁ ,D ₂ (B ₂),M ₃	Store on Condition (64)	RSY-b	EBE3	CL
STGRL	R ₁ ,I ₂	Store Relative Long (64)	RIL-b	C4B	GE
STH	R ₁ ,D ₂ (X ₂ ,B ₂)	Store Halfword	RX-a	40	
STHH	R ₁ ,D ₂ (X ₂ ,B ₂)	Store Halfword High (16)	RXY-a	E3C7	HW
STHRL	R ₁ ,I ₂	Store Halfword Relative Long	RIL-b	C47	GE
STHY	R ₁ ,D ₂ (X ₂ ,B ₂)	Store Halfword	RXY-a	E370	LD
STIDP	D ₂ (B ₂)	Store CPU ID	S	B202	p
STM	R ₁ ,R ₃ ,D ₂ (B ₂)	Store Multiple (32)	RS-a	90	
STMG	R ₁ ,R ₃ ,D ₂ (B ₂)	Store Multiple (64)	RSY-a	EB24	N
STMH	R ₁ ,R ₃ ,D ₂ (B ₂)	Store Multiple High	RSY-a	EB26	N
STMY	R ₁ ,R ₃ ,D ₂ (B ₂)	Store Multiple (32)	RSY-a	EB90	LD
STNSM	D ₁ (B ₁),I ₂	Store Then And System Mask	SI	AC	p
STOC	R ₁ ,D ₂ (B ₂),M ₃	Store on Condition (32)	RSY-b	EBF3	CL
STOSM	D ₁ (B ₁),I ₂	Store Then Or System Mask	SI	AD	p
STPQ	R ₁ ,D ₂ (X ₂ ,B ₂)	Store Pair to Quadword	RXY-a	E38E	N
STPT	D ₂ (B ₂)	Store CPU Timer	S	B209	p
STPX	D ₂ (B ₂)	Store Prefix	S	B211	p
STRAG	D ₁ (B ₁),D ₂ (B ₂)	Store Real Address	SSE	E502	p N
STRL	R ₁ ,I ₂	Store Relative Long (32)	RIL-b	C4F	GE
STRV	R ₁ ,D ₂ (X ₂ ,B ₂)	Store Reversed (32)	RXY-a	E33E	N3

Mnemonic	Operands	Name	Format	Op-code	Class & Notes
STRVG	R ₁ ,D ₂ (X ₂ ,B ₂)	Store Reversed (64)	RXY-a	E32F	N
STRVH	R ₁ ,D ₂ (X ₂ ,B ₂)	Store Reversed (16)	RXY-a	E33F	N3
STSCH	D ₂ (B ₂)	Store Subchannel	S	B234	p c
STSI	D ₂ (B ₂)	Store System Information	S	B27D	p c
STURA	R ₁ ,R ₂	Store Using Real Address (32)	RRE	B246	p
STURG	R ₁ ,R ₂	Store Using Real Address (64)	RRE	B925	p N
STY	R ₁ ,D ₂ (X ₂ ,B ₂)	Store (32)	RXY-a	E350	LD
SU	R ₁ ,D ₂ (X ₂ ,B ₂)	Subtract Unnormalized (SH)	RX-a	7F	c
SUR	R ₁ ,R ₂	Subtract Unnormalized (SH)	RR	3F	c
SVC	I	Supervisor Call	I	0A	
SW	R ₁ ,D ₂ (X ₂ ,B ₂)	Subtract Unnormalized (LH)	RX-a	6F	c
SWR	R ₁ ,R ₂	Subtract Unnormalized (LH)	RR	2F	c
SXBR	R ₁ ,D ₂	Subtract (EB)	RRE	B34B	c
SXR	R ₁ ,D ₂	Subtract Normalized (EH)	RR	37	c
SXTR	R ₁ ,R ₂ ,R ₃	Subtract (ED)	RRF-a	B3DB	c TF
SXTRA	R ₁ ,R ₂ ,R ₃ ,M ₄	Subtract (ED)	RRF-a	B3DB	c F
SY	R ₁ ,D ₂ (X ₂ ,B ₂)	Subtract (32)	RXY-a	E35B	c LD
TAM		Test Addressing Mode	E	010B	c N3
TAR	R ₁ ,R ₂	Test Access	RRE	B24C	c
TB	R ₁ ,R ₂	Test Block	RRE	B22C	i p c
TBDR	R ₁ ,M ₃ ,R ₂	Convert HFP to BFP (LB←LH)	RRF-e	B351	c
TBEDR	R ₁ ,M ₃ ,R ₂	Convert HFP to BFP (SB←LH)	RRF-e	B350	c
TCDB	R ₁ ,D ₂ (X ₂ ,B ₂)	Test Data Class (LB)	RXE	ED11	c
TCEB	R ₁ ,D ₂ (X ₂ ,B ₂)	Test Data Class (SB)	RXE	ED10	c
TCXB	R ₁ ,D ₂ (X ₂ ,B ₂)	Test Data Class (EB)	RXE	ED12	c
TDCDT	R ₁ ,D ₂ (X ₂ ,B ₂)	Test Data Class (LD)	RXE	ED54	TF
TDCET	R ₁ ,D ₂ (X ₂ ,B ₂)	Test Data Class (SD)	RXE	ED50	TF
TDCXT	R ₁ ,D ₂ (X ₂ ,B ₂)	Test Data Class (ED)	RXE	ED58	TF
TDGDT	R ₁ ,D ₂ (X ₂ ,B ₂)	Test Data Group (LD)	RXE	ED55	TF
TDGET	R ₁ ,D ₂ (X ₂ ,B ₂)	Test Data Group (SD)	RXE	ED51	TF
TDGXT	R ₁ ,D ₂ (X ₂ ,B ₂)	Test Data Group (ED)	RXE	ED59	TF
THDER	R ₁ ,R ₂	Convert BFP to HFP (LH←SB)	RRE	B358	c
THDR	R ₁ ,R ₂	Convert BFP to HFP (LH←LB)	RRE	B359	c
TM	D ₁ (B ₁),I ₂	Test under Mask	SI	91	c
TMH	R ₁ ,I ₂	Test under Mask High	RI-a	A70	c
TMHH	R ₁ ,I ₂	Test under Mask (high high)	RI-a	A72	c N
TMHL	R ₁ ,I ₂	Test under Mask (high low)	RI-a	A73	c N
TML	R ₁ ,I ₂	Test under Mask Low	RI-a	A71	c
TMLH	R ₁ ,I ₂	Test under Mask (low high)	RI-a	A70	c N
TMLL	R ₁ ,I ₂	Test under Mask (low low)	RI-a	A71	c N
TMY	D ₁ (B ₁),I ₂	Test under Mask	SIY	EB51	c LD
TP	D ₁ (L ₁ ,B ₁)	Test Decimal	RSL	EBC0	c E2
TPI	D ₂ (B ₂)	Test Pending Interruption	S	B236	p c
TPROT	D ₁ (B ₁),D ₂ (B ₂)	Test Protection	SSE	E501	p c
TR	D ₁ (L ₁ ,B ₁),D ₂ (B ₂)	Translate	SS-a	DC	
TRACE	R ₁ ,R ₃ ,D ₂ (B ₂)	Trace (32)	RS-a	99	p
TRACG	R ₁ ,R ₃ ,D ₂ (B ₂)	Trace (64)	RSY-a	EB0F	p N
TRAP2		Trap	E	01FF	
TRAP4	D ₂ (B ₂)	Trap	S	B2FF	
TRE	R ₁ ,R ₂	Translate Extended	RRE	B2A5	c
TROO	R ₁ ,R ₂ [,M ₃]	Translate One to One	RRF-c	B993	c E2
TROT	R ₁ ,R ₂ [,M ₃]	Translate One to Two	RRF-c	B992	c E2
TRT	D ₁ (L ₁ ,B ₁),D ₂ (B ₂)	Translate and Test	SS-a	DD	c
TRTE	R ₁ ,R ₂ [,M ₃]	Translate and Test Extended	RRF-c	B9BF	PE
TRTO	R ₁ ,R ₂ [,M ₃]	Translate Two to One	RRF-c	B991	c E2
TRTR	D ₁ (L ₁ ,B ₁),D ₂ (B ₂)	Translate and Test Reverse	SS-a	D0	c E3
TRTRE	R ₁ ,R ₂ [,M ₃]	Translate and Test Reverse Extended	RRF	B9BD	PE
TRTT	R ₁ ,R ₂ [,M ₃]	Translate Two to Two	RRF-c	B990	c E2
TS	D ₂ (B ₂)	Test and Set	S	93	c
TSCH	D ₂ (B ₂)	Test Subchannel	S	B235	p c

Mnemonic	Operands	Name	Format	Op-code	Class & Notes
UNPK	$D_1(L_1, B_1), D_2(L_2, B_2)$	Unpack	SS-b	F3	
UNPKA	$D_1(L_1, B_1), D_2(B_2)$	Unpack ASCII	SS-a	EA	c E2
UNPKU	$D_1(L_1, B_1), D_2(B_2)$	Unpack Unicode	SS-a	E2	c E2
UPT		Update Tree	E	0102	i c
X	$R_1, D_2(X_2, B_2)$	Exclusive OR (32)	RX-a	57	c
XC	$D_1(L, B_1), D_2(B_2)$	Exclusive OR (character)	SS-a	D7	c
XG	$R_1, D_2(X_2, B_2)$	Exclusive OR (64)	RXY-a	E382	c N
XGR	R_1, R_2	Exclusive OR (64)	RRE	B982	c N
XGRK	R_1, R_2, R_3	Exclusive OR (64)	RRF-a	B9E7	c DO
XI	$D_1(B_1), I_2$	Exclusive OR Immediate	SI	97	c
XIHF	R_1, I_2	Exclusive OR Immediate (high)	RIL-a	C06	c EI
XILF	R_1, I_2	Exclusive OR Immediate (low)	RIL-a	C07	c EI
XIY	$D_1(B_1), I_2$	Exclusive OR Immediate	SIY	EB57	c LD
XR	R_1, R_2	Exclusive OR (32)	RR	17	c
XRK	R_1, R_2, R_3	Exclusive OR (32)	RRF-a	B9F7	c DO
XSCH		Cancel Subchannel	S	B276	p c
XY	$R_1, D_2(X_2, B_2)$	Exclusive Or (32)	RXY-a	E357	c LD
ZAP	$D_1(L_1, B_1), D_2(L_2, B_2)$	Zero and Add	SS-b	F8	c

Floating-Point Operand Lengths and Types:

E	Extended (binary, decimal or hex)	LB	Long binary
EB	Extended binary	LD	Long decimal
ED	Extended decimal	LH	Long hex
EH	Extended hex	S	Short (binary, decimal or hex)
EHL	Extended hex (low-order part)	SB	Short binary
EHH	Extended hex (high-order part)	SD	Short decimal
L	Long (binary, decimal or hex)	SH	Short hex

Notes:

c	Condition code set	HM	HFP multiply-and-add/subtract facility
i	Interruptible instruction	HW	High-word facility
n	New condition code loaded	IA	Interlocked-access facility
p	Privileged instruction	LD	Long-displacement facility
q	Semiprivileged instruction	M3	Message-security assist extension 3
u	Condition code is unpredictable	M4	Message-security assist extension 4
CL	Conditional load / store facility	MO	Move-with-optional-specifications facility
CS	Compare-and-swap-and-store facility	MS	Message-security assist
CT	Configuration topology facility	N	New in z/Architecture
D2	DAT-enhancement facility 2	N3	New in z/Architecture and added to ESA/390
DE	DAT-enhancement facility	PE	Parsing-enhancement facility
DO	Distinct-operands facility	PF	PFPO facility
E2	Extended-translation facility 2	PK	Population-count facility
E3	Extended-translation facility 3	RA	ASN-and-LX-reuse facility
ED	Enhanced-DAT facility	RB	Reset-reference-bits multiple facility
EI	Extended-immediate facility	SC	Store-clock-fast facility
ES	Expanded-storage facility	TF	Decimal-floating-point facility
ET	Extract-CPU-time facility	TR	Decimal-floating-point-rounding facility
F	Floating-point-extension facility	TS	TOD-clock-steering facility
FG	FPR-GPR-transfer facility	UE	HFP unnormalized-extension facility
FL	Store-facility-list-extended facility	XF	IEEE-exception-support facility
FS	Floating-point-support-sign-handling facility	XX	Execute-extension facility
GE	General-instructions-extension facility		

Machine Instructions by Operation Code

OpCode	Mnemonic
0101	PR
0102	UPT
0104	PFFF
0107	SCKPF
010A	PFPO
010B	TAM
010C	SAM24
010D	SAM31
010E	SAM64
01FF	TRAP2
04	SPM
05	BALR
06	BCTR
07	BCR
0A	SVC
0B	BSM
0C	BASSM
0D	BASR
0E	MVCL
0F	CLCL
10	LPR
11	LNR
12	LTR
13	LCR
14	NR
15	CLR
16	OR
17	XR
18	LR
19	CR
1A	AR
1B	SR
1C	MR
1D	DR
1E	ALR
1F	SLR
20	LPDR
21	LNDR
22	LTDR
23	LCDR
24	HDR
25	LDXR
25	LRDR
26	MXR
27	MXDR
28	LDR
29	CDR
2A	ADR
2B	SDR
2C	MDR
2D	DDR
2E	AWR
2F	SWR
30	LPER
31	LNER
32	LTER
33	LCER
34	HER
35	LEDR
35	LRER
36	AXR
37	SXR
38	LER
39	CER
3A	AER
3B	SER
3C	MDER
3C	MER
3D	DER
3E	AUR
3F	SUR
40	STH

OpCode	Mnemonic
41	LA
42	STC
43	IC
44	EX
45	BAL
46	BCT
47	BC
48	LH
49	CH
4A	AH
4B	SH
4C	MH
4D	BAS
4E	CVD
4F	CVB
50	ST
51	LAE
54	N
55	CL
56	O
57	X
58	L
59	C
5A	A
5B	S
5C	M
5D	D
5E	AL
5F	SL
60	STD
67	MXD
68	LD
69	CD
6A	AD
6B	SD
6C	MD
6D	DD
6E	AW
6F	SW
70	STE
71	MS
78	LE
79	CE
7A	AE
7B	SE
7C	MDE
7C	ME
7D	DE
7E	AU
7F	SU
80	SSM
82	LPSW
83	Diagnose
84	BRXH
85	BRXLE
86	BXH
87	BXLE
88	SRL
89	SLL
8A	SRA
8B	SLA
8C	SRDL
8D	SLDL
8E	SRDA
8F	SLDA
90	STM
91	TM
92	MVI
93	TS
94	NI
95	CLI
96	OI

OpCode	Mnemonic
97	XI
98	LM
99	TRACE
9A	LAM
9B	STAM
A50	IIHH
A51	IIHL
A52	IILH
A53	IILL
A54	NIHH
A55	NIHL
A56	NILH
A57	NILL
A58	OIHH
A59	OIHL
A5A	OILH
A5B	OILL
A5C	LLIHH
A5D	LLIHL
A5E	LLILH
A5F	LLILL
A70	TMH
A70	TMLH
A71	TML
A71	TMLL
A72	TMHH
A73	TMHL
A74	BRC
A75	BRAS
A76	BRCT
A77	BRCTG
A78	LHI
A79	LGHI
A7A	AHI
A7B	AGHI
A7C	MHI
A7D	MGHI
A7E	CHI
A7F	CGHI
A8	MVCLE
A9	CLCLE
AC	STNSM
AD	STOSM
AE	SIGP
AF	MC
B1	LRA
B202	STIDP
B204	SCK
B205	STCK
B206	SCKC
B207	STCKC
B208	SPT
B209	SPTP
B20A	SPKA
B20B	IPK
B20D	PTLB
B210	SPX
B211	STPX
B212	STAP
B214	SIE
B218	PC
B219	SAC
B21A	CFC
B221	IPTE
B222	IPM
B223	IVSK
B224	IAC
B225	SSAR
B226	EPAR
B227	ESAR
B228	PT
B229	ISKE

OpCode	Mnemonic
B22A	RRBE
B22B	SSKE
B22C	TB
B22D	DXR
B22E	PGIN
B22F	PGOUT
B230	CSCH
B231	HSCH
B232	MSCH
B233	SSCH
B234	STSCH
B235	TSCH
B236	TPI
B237	SAL
B238	RSCH
B239	STCRW
B23A	STCPS
B23B	RCHP
B23C	SCHM
B240	BAKR
B241	CKSM
B244	SQDR
B245	SQER
B246	STURA
B247	MSTA
B248	PALB
B249	EREG
B24A	ESTA
B24B	LURA
B24C	TAR
B24D	CPYA
B24E	SAR
B24F	EAR
B250	CSP
B252	MSR
B254	MVPG
B255	MVST
B257	CUSE
B258	BSG
B25A	BSA
B25D	CLST
B25E	SRST
B263	CMPSC
B276	XSCH
B277	RP
B278	STCKE
B279	SACF
B27C	STCKF
B27D	STSI
B299	SRNM
B29C	STFPC
B29D	LFPC
B2A5	TRE
B2A6	CU21
B2A6	CUUTF
B2A7	CU12
B2A7	CUTFU
B2B0	STFLE
B2B1	STFL
B2B2	LPSWE
B2B8	SRNMB
B2B9	SRNMT
B2BD	LFAS
B2FF	TRAP4
B300	LPEBR
B301	LNEBR
B302	LTEBR
B303	LCEBR
B304	LDEBR
B305	LXDBR
B306	LXEBR
B307	MXDBR
B308	KEBR
B309	CEBR
B30A	AEBR
B30B	SEBR

OpCode	Mnemonic
B30C	MDEBR
B30D	DEBR
B30E	MAEBR
B30F	MSEBR
B310	LPDBR
B311	LNDBR
B312	LTDBR
B313	LCDBR
B314	SQEBR
B315	SQDBR
B316	SQXBR
B317	MEEBR
B318	KDBR
B319	CDBR
B31A	ADBR
B31B	SDBR
B31C	MDBR
B31D	DDBR
B31E	MADBR
B31F	MSDBR
B324	LDER
B325	LXDR
B326	LXER
B32E	MAER
B32F	MSER
B336	SQXR
B337	MEER
B338	MAYLR
B339	MYLR
B33A	MAYR
B33B	MYR
B33C	MAYHR
B33D	MYHR
B33E	MADR
B33F	MSDR
B340	LPXBR
B341	LNXBR
B342	LTXBR
B343	LCXBR
B344	LEDBR
B344	LEDBRA
B345	LDXBR
B345	LDXBRA
B346	LEXBR
B346	LEXBRA
B347	FIXBR
B347	FIXBRA
B348	KXBR
B349	CXBR
B34A	AXBR
B34B	SXBR
B34C	MXBR
B34D	DXBR
B350	TBEDR
B351	TBDR
B353	DIEBR
B357	FIEBR
B357	FIEBRA
B358	THDER
B359	THDR
B35B	DIDBR
B35F	FIDBR
B35F	FIDBRA
B360	LPXR
B361	LNXR
B362	LTXR
B363	LCXR
B365	LXR
B366	LEXR
B367	FIXR
B369	CXR
B370	LPDFR
B371	LNDFR
B372	CPSDR
B373	LCDFR
B374	LZER

OpCode	Mnemonic
B375	LZDR
B376	LZXR
B377	FIER
B37F	FIDR
B384	SFPC
B385	SFASR
B38C	EFPC
B390	CELFBR
B391	CDLFBR
B392	CXLFBR
B394	CEFBR
B394	CEFBRA
B395	CDFBR
B395	CDFBRA
B396	CXFBR
B396	CXFBRA
B398	CFEBR
B398	CFEBRA
B399	CFDBR
B399	CFDBRA
B39A	CFXBR
B39A	CFXBRA
B39C	CLFEBR
B39D	CLFDBR
B39E	CLFXBR
B3A0	CELGBR
B3A1	CDLGBR
B3A2	CXLGBR
B3A4	CEGBR
B3A4	CEGBRA
B3A5	CDGBR
B3A5	CDGBRA
B3A6	CXGBR
B3A6	CXGBRA
B3A8	CGEBR
B3A8	CGEBRA
B3A9	CGDBR
B3A9	CGDBRA
B3AA	CGXBR
B3AA	CGXBRA
B3AC	CLGEBR
B3AD	CLGDBR
B3AE	CLGXBR
B3B4	CEFR
B3B5	CDFR
B3B6	CXFR
B3B8	CFER
B3B9	CFDR
B3BA	CFXR
B3C1	LDGR
B3C4	CEGR
B3C5	CDGR
B3C6	CXGR
B3C8	CGER
B3C9	CGDR
B3CA	CGXR
B3CD	LGDR
B3D0	MDTR
B3D0	MDTRA
B3D1	DDTR
B3D1	DDTRA
B3D2	ADTR
B3D2	ADTRA
B3D3	SDTR
B3D3	SDTRA
B3D4	LETR
B3D5	LEDTR
B3D6	LTDR
B3D7	FIDTR
B3D8	MXTR
B3D8	MXTRA
B3D9	DXTR
B3D9	DXTRA
B3DA	AXTR
B3DA	AXTRA
B3DB	SXTR

OpCode	Mnemonic
B3DB	SXTRA
B3DC	LXDTR
B3DD	LDXTR
B3DE	LTXTR
B3DF	FIXTR
B3E0	KDTR
B3E1	CGDTR
B3E1	CGDTRA
B3E2	CUDTR
B3E3	CSDTR
B3E4	CDTR
B3E5	EEDTR
B3E7	ESDTR
B3E8	KXTR
B3E9	CGXTR
B3E9	CGXTRA
B3EA	CUXTR
B3EB	CSXTR
B3EC	CXTR
B3ED	EEXTR
B3EF	ESXTR
B3F1	CDGTR
B3F1	CDGTRA
B3F2	CDUTR
B3F3	CDSTR
B3F4	CEDTR
B3F5	QADTR
B3F6	IEDTR
B3F7	RRDTR
B3F9	CXGTR
B3F9	CXGTRA
B3FA	CXUTR
B3FB	CXSTR
B3FC	CEXTR
B3FD	QAXTR
B3FE	IEXTR
B3FF	RRXTR
B6	STCTL
B7	LCTL
B900	LPGR
B901	LNGR
B902	LTGR
B903	LCGR
B904	LGR
B905	LURAG
B906	LGBR
B907	LGHR
B908	AGR
B909	SGR
B90A	ALGR
B90B	SLGR
B90C	MSGR
B90D	DSGR
B90E	EREGG
B90F	LRVGR
B910	LPGFR
B911	LNGFR
B912	LTGFR
B913	LCGFR
B914	LGFR
B916	LLGFR
B917	LLGTR
B918	AGFR
B919	SGFR
B91A	ALGFR
B91B	SLGFR
B91C	MSGFR
B91D	DSGFR
B91E	KMAC
B91F	LRVR
B920	CGR
B921	CLGR
B925	STURG
B926	LBR
B927	LHR
B928	PCKMO

OpCode	Mnemonic
B92A	KMF
B92B	KMO
B92C	PCC
B92D	KMCTR
B92E	KM
B92F	KMC
B930	CGFR
B931	CLGFR
B93E	KIMD
B93F	KLMD
B941	CFDTR
B942	CLGDTR
B943	CLFDTR
B946	BCTGR
B949	CFXTR
B94A	CLGXTR
B94B	CLFXTR
B951	CDFTR
B952	CDLGTR
B953	CDLFTR
B959	CXFTR
B95A	CXLGTR
B95B	CXLFTR
B960	CGRT
B961	CLGRT
B972	CRT
B973	CLRT
B980	NGR
B981	OGR
B982	XGR
B983	FLOGR
B984	LLGCR
B985	LLGHR
B986	MLGR
B987	DLGR
B988	ALCGR
B989	SLBGR
B98A	CSPG
B98D	EPSW
B98E	IDTE
B990	TRTT
B991	TRTO
B992	TROT
B993	TROO
B994	LLCR
B995	LLHR
B996	MLR
B997	DLR
B998	ALCR
B999	SLBR
B99A	EPAIR
B99B	ESAIR
B99D	ESEA
B99E	PTI
B99F	SSAIR
B9A2	PTF
B9AA	LPTEA
B9AE	RRBM
B9AF	PFMF
B9B0	CU14
B9B1	CU24
B9B2	CU41
B9B3	CU42
B9BD	TRTRE
B9BE	SRSTU
B9BF	TRTE
B9C8	AHHHR
B9C9	SHHHR
B9CA	ALHHHR
B9CB	SLHHHR
B9CD	CHHR
B9CF	CLHHR
B9D8	AHHLR
B9D9	SHHLR
B9DA	ALHHLR
B9DB	SLHHLR

OpCode	Mnemonic
B9DD	CHLR
B9DF	CLHLR
B9E1	POPCNT
B9E2	LGROC
B9E4	NGRK
B9E6	OGRK
B9E7	XGRK
B9E8	AGRK
B9E9	SGRK
B9EA	ALGRK
B9EB	SLGRK
B9F2	LROC
B9F4	NRK
B9F6	ORK
B9F7	XRK
B9F8	ARK
B9F9	SRK
B9FA	ALRK
B9FB	SLRK
BA	CS
BB	CDS
BD	CLM
BE	STCM
BF	ICM
C00	LARL
C01	LGFI
C04	BRCL
C05	BRASL
C06	XIHF
C07	XILF
C08	IHF
C09	IILF
C0A	NIHF
C0B	NILF
C0C	OIHF
C0D	OILF
C0E	LLIHF
C0F	LLILF
C20	MSGFI
C21	MSFI
C24	SLGFI
C25	SLFI
C28	AGFI
C29	AFI
C2A	ALGFI
C2B	ALFI
C2C	CGFI
C2D	CFI
C2E	CLGFI
C2F	CLFI
C42	LLHRL
C44	LGHRL
C45	LHRL
C46	LLGHRL
C47	STHRL
C48	LGRL
C4B	STGRL
C4C	LGFR
C4D	LRL
C4E	LLGFRL
C4F	STRL
C60	EXRL
C62	PFDR
C64	CGHRL
C65	CHRL
C66	CLGHRL
C67	CLHRL
C68	CGRL
C6A	CLGRL
C6C	CGFRL
C6D	CRL
C6E	CLGFRL
C6F	CLRL
C80	MVCOS
C81	ECTG
C82	CSST

OpCode	Mnemonic
C84	LPD
C85	LPDG
CC6	BRCTH
CC8	AIH
CCA	ALSIH
CCB	ALSIHN
CCD	CIH
CCF	CLIH
D0	TRTR
D1	MVN
D2	MVC
D3	MVZ
D4	NC
D5	CLC
D6	OC
D7	XC
D9	MVCK
DA	MVCP
DB	MVCS
DC	TR
DD	TRT
DE	ED
DF	EDMK
E1	PKU
E2	UNPKU
E302	LTG
E303	LRAG
E304	LG
E306	CVBY
E308	AG
E309	SG
E30A	ALG
E30B	SLG
E30C	MSG
E30D	DSG
E30E	CVBG
E30F	LRVG
E312	LT
E313	LRAY
E314	LGF
E315	LGH
E316	LLGF
E317	LLGT
E318	AGF
E319	SGF
E31A	ALGF
E31B	SLGF
E31C	MSGF
E31D	DSGF
E31E	LRV
E31F	LRVH
E320	CG
E321	CLG
E324	STG
E326	CVDY
E32E	CVDG
E32F	STRVG
E330	CGF
E331	CLGF
E332	LTGF
E334	CGH
E336	PFD
E33E	STRV
E33F	STRVH
E346	BCTG
E350	STY
E351	MSY
E354	NY
E355	CLY
E356	OY
E357	XY
E358	LY
E359	CY
E35A	AY
E35B	SY
E35C	MFY

OpCode	Mnemonic
E35E	ALY
E35F	SLY
E370	STHY
E371	LAY
E372	STCY
E373	ICY
E375	LAEY
E376	LB
E377	LGB
E378	LHY
E379	CHY
E37A	AHY
E37B	SHY
E37C	MHY
E380	NG
E381	OG
E382	XG
E386	MLG
E387	DLG
E388	ALCG
E389	SLBG
E38E	STPQ
E38F	LPQ
E390	LLGC
E391	LLGH
E394	LLC
E395	LLH
E396	ML
E397	DL
E398	ALC
E399	SLB
E3C0	LBH
E3C2	LLCH
E3C3	STCH
E3C4	LHH
E3C6	LLHH
E3C7	STHH
E3CA	LFH
E3CB	STFH
E3CD	CHF
E3CF	CLHF
E500	LASP
E501	TPROT
E502	STRAG
E50E	MVCSK
E50F	MVCDK
E544	MVHHI
E548	MVGHI
E54C	MVHI
E554	CHHSI
E555	CLHHSI
E558	CGHSI
E559	CLGHSI
E55C	CHSI
E55D	CLFHSI
E8	MVCIN
E9	PKA
EA	UNPKA
EB04	LMG
EB0A	SRAG
EB0B	SLAG
EB0C	SRLG
EB0D	SLLG
EB0F	TRACG
EB14	CSY
EB1C	RLLG
EB1D	RLL
EB20	CLMH
EB21	CLMY
EB24	STMG
EB25	STCTG
EB26	STMH
EB2C	STCMH
EB2D	STCMY
EB2F	LCTLG
EB30	CSG

OpCode	Mnemonic
EB31	CDSY
EB3E	CDSG
EB44	BXHG
EB45	BXLEG
EB4C	ECAG
EB51	TMY
EB52	MVIY
EB54	NIY
EB55	CLYI
EB56	OIY
EB57	XIY
EB6A	ASI
EB6E	ALSI
EB7A	AGSI
EB7E	ALGSI
EB80	ICMH
EB81	ICMY
EB8E	MVCLU
EB8F	CLCLU
EB90	STMY
EB96	LMH
EB98	LMY
EB9A	LAMY
EB9B	STAMY
EBC0	TP
EBDC	SRAK
EBDD	SLAK
EBDE	SRLK
EBDF	SLLK
EBE2	LGOC
EBE3	STGOC
EBE4	LANG
EBE6	LAOG
EBE7	LAXG
EBE8	LAAG
EBEA	LAALG
EBF2	LOC
EBF3	STOC
EBF4	LAN
EBF6	LAO
EBF7	LAX
EBF8	LAA
EBFA	LAAL
EC44	BRXHG
EC45	BRXLG
EC51	RISBLG
EC54	RNSBG
EC55	RISBG
EC56	ROSBG
EC57	RXSBG
EC5D	RISBHG
EC64	CGRJ
EC65	CLGRJ
EC70	CGIT
EC71	CLGIT
EC72	CIT
EC73	CLFIT
EC76	CRJ
EC77	CLRJ
EC7C	CGIJ
EC7D	CLGIJ
EC7E	CIJ
EC7F	CLIJ
ECD8	AHIK
ECD9	AGHIK
ECDA	ALHSIK
ECDB	ALGHSIK
ECE4	CGRB
ECE5	CLGRB
ECF6	CRB
ECF7	CLRB
ECFC	CGIB
ECFD	CLGIB
ECFE	CIB
ECFF	CLIB
ED04	LDEB

OpCode	Mnemonic
ED05	LXDB
ED06	LXEB
ED07	MXDB
ED08	KEB
ED09	CEB
ED0A	AEB
ED0B	SEB
ED0C	MDEB
ED0D	DEB
ED0E	MAEB
ED0F	MSEB
ED10	TCEB
ED11	TCDB
ED12	TCXB
ED14	SQEB
ED15	SQDB
ED17	MEEB
ED18	KDB
ED19	CDB
ED1A	ADB
ED1B	SDB
ED1C	MDB
ED1D	DDB
ED1E	MADB
ED1F	MSDB
ED24	LDE
ED25	LXD
ED26	LXE
ED2E	MAE
ED2F	MSE
ED34	SQE
ED35	SQD
ED37	MEE
ED38	MAYL
ED39	MYL
ED3A	MAY
ED3B	MY
ED3C	MAYH
ED3D	MYH
ED3E	MAD
ED3F	MSD
ED40	SLDT
ED41	SRDT
ED48	SLXT
ED49	SRXT
ED50	TDCET
ED51	TDGET
ED54	TDCDT
ED55	TDGDT
ED58	TDCXT
ED59	TDGXT
ED64	LEY
ED65	LDY
ED66	STEY
ED67	STDY
EE	PLO
EF	LMD
F0	SRP
F1	MVO
F2	PACK
F3	UNPK
F8	ZAP
F9	CP
FA	AP
FB	SP
FC	MP
FD	DP

Condition Codes

Condition Code →	0	1	2	3
Mask Bit Value →	8	4	2	1
General Instructions				
Add	Zero	< Zero	> Zero	Overflow
Add Halfword	Zero	< Zero	> Zero	Overflow
Add Halfword Immediate	Zero	< Zero	> Zero	Overflow
Add High	Zero	< Zero	> Zero	Overflow
Add Immediate	Zero	< Zero	> Zero	Overflow
Add Immediate High	Zero	< Zero	> Zero	Overflow
Add Logical	Zero, no carry	Not zero, no carry	Zero, carry	Not zero, carry
Add Logical High	Zero, no carry	Not zero, no carry	Zero, carry	Not zero, carry
Add Logical Immediate	Zero, no carry	Not zero, no carry	Zero, carry	Not zero, carry
Add Logical with Carry	Zero, no carry	Not zero, no carry	Zero, carry	Not zero, carry
Add Logical with Signed Immediate	Zero, no carry	Not zero, no carry	Zero, carry	Not zero, carry
Add Logical with Signed Immediate High	Zero, no carry	Not zero, no carry	Zero, carry	Not zero, carry
AND	Zero	Not zero	—	—
AND Immediate	ANDed bits zero	ANDed bits not zero	—	—
Checksum	Checksum complete	—	—	CPU-determined completion
Cipher Message	Normal completion	Verification mismatch	—	Partial completion
Cipher Message with Chaining	Normal completion	Verification mismatch	—	Partial completion
Cipher Message with CFB	Normal completion	Verification mismatch	—	Partial completion
Cipher Message with Counter	Normal completion	Verification mismatch	—	Partial completion
Cipher Message with OFB	Normal completion	Verification mismatch	—	Partial completion
Compare	Equal	First op low	First op high	—
Compare and Form Codeword	Equal	First op low and ctl = 0, or first op high and ctl = 1	First op high and ctl = 0, or first op low and ctl = 1	—
Compare and Swap	Equal	Not equal	—	—
Compare and Swap and Store	Equal	Not equal	—	—
Compare Double and Swap	Equal	Not equal	—	—
Compare Halfword	Equal	First op low	First op high	—
Compare Halfword Immediate	Equal	First op low	First op high	—
Compare Halfword Relative Long	Equal	First op low	First op high	—
Compare High	Equal	First op low	First op high	—
Compare Immediate	Equal	First op low	First op high	—
Compare Immediate High	Equal	First op low	First op high	—
Compare Logical	Equal	First op low	First op high	—
Compare Logical Characters under Mask	Equal, or Mask is zero	First op low	First op high	—
Compare Logical High	Equal	First op low	First op high	—
Compare Logical Immediate	Equal	First op low	First op high	—
Compare Logical Immediate High	Equal	First op low	First op high	—
Compare Logical Long	Equal	First op low	First op high	—
Compare Logical Long Extended	Equal	First op low	First op high	CPU-determined completion
Compare Logical Long Unicode	Equal	First op low	First op high	CPU-determined completion
Compare Logical Relative Long	Equal	First op low	First op high	—
Compare Logical String	Equal	First op low	First op high	CPU-determined completion
Compare Relative Long	Equal	First op low	First op high	—
Compare until Substring Equal	Equal substring	First op low Last bytes equal	First op high Last bytes unequal	CPU-determined completion

Condition Code →	0	1	2	3
Mask Bit Value →	8	4	2	1
Compression Call	Second op end	First op end, not second op end	—	CPU-determined completion
Compute Intermediate Message Digest	Normal completion	—	—	Partial completion
Compute Last Message Digest	Normal completion	—	—	Partial completion
Compute Message Authentication Code	Normal completion	Verification mismatch	—	Partial completion
Convert UTF-16 to UTF-32	Data processed	First op full	Invalid low surrogate	CPU-determined completion
Convert UTF-16 to UTF-8	Data processed	First op full	Invalid low surrogate	CPU-determined completion
Convert UTF-32 to UTF-16	Data processed	First op full	Invalid UTF-32 character	CPU-determined completion
Convert UTF-32 to UTF-8	Data processed	First op full	Invalid UTF-32 character	CPU-determined completion
Convert UTF-8 to UTF-16	Data processed	First op full	Invalid UTF-8 character	CPU-determined completion
Convert UTF-8 to UTF-32	Data processed	First op full	Invalid UTF-8 character	CPU-determined completion
Exclusive OR	Zero	Not zero	—	—
Exclusive OR Immediate	XORed bits zero	XORed bits not zero	—	—
Find Leftmost One	No one bit found	—	One bit found	—
Insert Characters under Mask	All zero, or mask is zero	Leftmost bit = 1	Not zero, but with leftmost bit = 0	—
Load and Test	Zero	< Zero	> Zero	—
Load Complement	Zero	< Zero	> Zero	Overflow
Load Negative	Zero	< Zero	—	—
Load Positive	Zero	—	> Zero	Overflow
Move Long	Operand lengths equal	First op shorter	First op longer	Overlap
Move Long Extended	Operand lengths equal	First op shorter	First op longer	CPU-determined completion
Move Long Unicode	Operand lengths equal	First op shorter	First op longer	CPU-determined completion
Move String	—	Second op moved	—	CPU-determined completion
OR	Zero	Not zero	—	—
OR Immediate	ORed bits zero	ORed bits not zero	—	—
Perform Cryptographic Computation	Normal completion	Verification mismatch	—	Partial completion
Perform Locked Operation (test bit zero)	Equal	First op not equal	First op equal, third op not equal	—
Perform Locked Operation (test bit one)	Code valid	—	—	Code invalid
Population Count	Zero	Not zero	—	—
Rotate Then AND Selected Bits	Selected bits zero	Selected bits not zero	—	—
Rotate Then Exclusive OR Selected Bits	Selected bits zero	Selected bits not zero	—	—
Rotate Then Insert Selected Bits	Zero	< zero	> zero	—
Rotate Then OR Selected Bits	Selected bits zero	Selected bits not zero	—	—
Search String, Search String Unicode	—	Character found	Character not found	CPU-determined completion
Set Program Mask	See Note	See Note	See Note	See Note
Shift Left (Double / Single)	Zero	< Zero	> Zero	Overflow

Condition Code →	0	1	2	3
Mask Bit Value →	8	4	2	1
Shift Right (Double / Single)	Zero	< Zero	> Zero	—
Store Clock (STCK, STCKE or STCKF)	Set state	Not-set state	Error state	Stopped state or not operational
Store Facility List Extended	Complete list stored	—	—	Incomplete list stored
Subtract	Zero	< Zero	> Zero	Overflow
Subtract Halfword	Zero	< Zero	> Zero	Overflow
Subtract High	Zero	< Zero	> Zero	Overflow
Subtract Logical	—	Not zero, borrow	Zero, no borrow	Not zero, no borrow
Subtract Logical High	—	Not zero, borrow	Zero, no borrow	Not zero, no borrow
Subtract Logical Immediate	—	Not zero, borrow	Zero, no borrow	Not zero, no borrow
Subtract Logical with Borrow	Zero, borrow	Not zero, borrow	Zero, no borrow	Not zero, no borrow
Test Addressing Mode	24-bit mode	31-bit mode	—	64-bit mode
Test and Set	Leftmost bit zero	Leftmost bit one	—	—
Test under Mask (TM)	All zeros, or mask is zero	Mixed 0's and 1's	—	All ones
Test under Mask (TMH, TMHH, TML, TMLH, TMLL)	All zeros or mask is zero	Mixed 0's and 1's and leftmost bit zero	Mixed 0's and 1's and leftmost bit one	All ones
Test under Mask High, Low	All zeros or mask is zero	Mixed 0's and 1's and leftmost bit zero	Mixed 0's and 1's and leftmost bit one	All ones
Translate and Test, Translate and Test Reverse	All zeros	Not zero, scan incomplete	Not zero, scan complete	—
Translate and Test Extended, Translate and Test Reverse Extended	All selected function codes zero	Nonzero function code selected	—	CPU-determined completion
Translate Extended	Data processed	First op byte equal test byte	—	CPU-determined completion
Translate One to One, One to Two, Two to One, Two to Two	Character not found	Character found	—	CPU determined completion
Unpack ASCII	Sign plus	Sign minus	—	Sign invalid
Unpack Unicode	Sign plus	Sign minus	—	Sign invalid
Update Tree	Compare equal at current node on path	Path complete, no nodes compared equal	—	Path not complete and compared register negative
Decimal Instructions				
Add Decimal	Zero	< Zero	> Zero	Overflow
Compare Decimal	Equal	First op low	First op high	—
Edit	Zero	< Zero	> Zero	—
Edit and Mark	Zero	< Zero	> Zero	—
Shift and Round Decimal	Zero	< Zero	> Zero	Overflow
Subtract Decimal	Zero	< Zero	> Zero	Overflow
Test Decimal	Digits and sign valid	Sign invalid	Digit invalid	Sign and digit invalid
Zero and Add	Zero	< Zero	> Zero	Overflow
Floating-Point Instructions				
Add	Zero	< Zero	> Zero	NaN
Add Normalized	Zero	< Zero	> Zero	—
Add Unnormalized	Zero	< Zero	> Zero	—
Compare (BFP)	Equal	First op low	First op high	Unordered
Compare (HFP)	Equal	First op low	First op high	—
Compare and Signal	Equal	First op low	First op high	Unordered
Compare Biased Exponent	Equal	First op low	First op high	Unordered
Convert BFP to HFP	Zero	< Zero	> Zero	Special case
Convert HFP to BFP	Zero	< Zero	> Zero	Special case
Convert to Fixed	Zero	< Zero	> Zero	Special case
Convert to Logical	Zero	< Zero	> Zero	Special case
Divide to Integer	Remainder complete, quotient normal	Remainder complete, quotient overflow or NaN	Remainder incomplete, quotient normal	Remainder incomplete, quotient overflow or NaN

Condition Code →	0	1	2	3
Mask Bit Value →	8	4	2	1
Load and Test (BFP)	Zero	< Zero	> Zero	NaN
Load and Test (HFP)	Zero	< Zero	> Zero	—
Load Complement (BFP)	Zero	< Zero	> Zero	NaN
Load Complement (HFP)	Zero	< Zero	> Zero	—
Load Negative (BFP)	Zero	< Zero	—	NaN
Load Negative (HFP)	Zero	< Zero	—	—
Load Positive (BFP)	Zero	—	> Zero	NaN
Load Positive (HFP)	Zero	—	> Zero	—
Perform Floating-Point Operation (T=0)	Normal result	Nontrap exception	Trap exception	—
Perform Floating-Point Operation (T=1)	Function valid	—	—	Function invalid
Subtract	Zero	< Zero	> Zero	NaN
Subtract Normalized	Zero	< Zero	> Zero	—
Subtract Unnormalized	Zero	< Zero	> Zero	—
Test Data Class	Zero (no match)	One (match)	—	—
Test Data Group	Zero (no match)	One (match)	—	—
Control Instructions				
Compare and Swap and Purge	Equal	Not equal	—	—
Diagnose	See note	See note	See note	See note
Extract Stacked State	Branch state entry	Program call state entry	—	—
Insert Address Space Control	Primaryspace mode	Secondaryspace mode	Access register mode	Homespace mode
Load Address Space Parameters	Parameters loaded	Primary not available	Secondary not authorized or not available	Spaceswitch event
Load Page-Table-Entry Address	Address returned; STE.P=0	Address returned; STE.P=1	Invalid bit on in RTE or STE.	Exception condition exists.
Load PSW	See note	See note	See note	See note
Load PSW Extended	See note	See note	See note	See note
Load Real Address	Translation available	Segmentable entry invalid	Pagetable entry invalid	See note
Move Page	Data moved	First op invalid, both valid in ES, locked, or ES error	Second op invalid	—
Move to Primary	Length ≤ 256	—	—	Length > 256
Move to Secondary	Length ≤ 256	—	—	Length > 256
Move with Key	Length ≤ 256	—	—	Length > 256
Move with Optional Specifications	Length ≤ 4096	—	—	Length > 4096
Page In	Operation completed	ES data error	—	ES block not available
Page Out	Operation completed	ES data error	—	ES block not available
Perform Timing Facility Function	Function performed	—	—	Function not available
Perform Topology Function	Initiated	—	Rejected	—
Program Return	See note	See note	See note	See note
Reset Reference Bit Extended	Ref = 0, Chg = 0	Ref = 0, Chg = 1	Ref = 1, Chg = 0	Ref = 1, Chg = 1
Resume Program	See note	See note	See note	See note
Set Clock	Set	Secure	—	Not operational
Signal Processor	Accepted	Status stored	Busy	Not operational
Store System Information	Info provided	—	—	Info not available
Test Access	ALET = 0	ALET uses DUALD	ALET uses PSALD	ALET = 1 or causes ART exception
Test Block	Usable	Unusable	—	—
Test Protection	Fetch and store allowed	Fetch allowed; no store allowed	No fetch or store allowed	Translation not available

Condition Code →	0	1	2	3
Mask Bit Value →	8	4	2	1
Input/Output Instructions				
Cancel Subchannel	Function started	—	—	Not operational
Clear Subchannel	Function started	—	—	Not operational
Halt Subchannel	Function started	Nonintermediate status pending	Busy	Not operational
Modify Subchannel	Function executed	Status pending	Busy	Not operational
Reset Channel Path	Function started	—	Busy	Not operational
Resume Subchannel	Function started	Status pending	Not applicable	Not operational
Start Subchannel	Function started	Status pending	Busy	Not operational
Store Channel Report Word	CRW stored	Zeros stored	—	—
Store Subchannel	SCHIB stored	—	—	Not operational
Test Pending Interruption	Interruption not pending	Interruption code stored	—	—

Notes:

For Diagnose, the resulting condition code is model-dependent.

For Load Real Address, condition code 3 is set if address-space-control element not available, region-table entry outside table or invalid, segment-table entry outside table, or, for LRA in 24- or 31-bit mode when bits 0-32 of entry address not all zeros, segment- or page-table entry invalid.

For Load PSW, Load PSW Extended, and Resume Program, the condition code is loaded from the condition-code field of the second operand.

For Set Program Mask, the condition code is loaded from bit positions 2 and 3 of the first operand.

Assembler Instructions

Function	Mnemonic	Meaning
Option control	*PROCESS ACONTROL	Specify assembler options Dynamically modify options
Data definition	CCW CCW0 CCW1 DC DS	Define channel command word Define format-0 channel command word Define format-1 channel command word Define constant Define storage
Program sectioning and linking	ALIAS AMODE CATTR COM CSECT CXD DSECT DXD ENTRY EXTRN LOCTR RMODE RSECT START WXTRN XATTR	Rename external symbol Specify addressing mode Define class/part name and attributes Identify common control section Identify control section Cumulative length of external dummy section Identify dummy section Define external dummy section Identify entry-point symbol Identify external symbol Specify multiple location counters Specify residence mode Identify read-only control section Start assembly Identify weak external symbol Declare external symbol attributes
Base register assignment	DROP USING	Drop base address register Use base address and register
Control of listing	AEJECT ASPACE CEJECT EJECT PRINT SPACE TITLE	Start new page in macro definition Space lines in macro definition Conditional start new page Start new page Control listing contents Space listing Identify assembly output

Function	Mnemonic	Meaning
Program control	ADATA	Provide data for SYSADATA file
	CNOP	Conditional no operation
	COPY	Copy predefined source coding
	END	End assembly
	EQU	Equate symbol
	EXITCTL	Program control data for I/O exits
	ICTL	Input format control
	ISEQ	Input sequence checking
	LTOrg	Begin literal pool
	OPSYN	Equate operation code
	ORG	Set location counter
	POP	Restore ACONTROL, PRINT, or USING status
	PUNCH	Punch a record
	PUSH	Save current ACONTROL, PRINT, or USING status
REPRO	Reproduce following record	
Conditional assembly	ACTR	Conditional assembly branch counter
	AGO	Unconditional branch
	AIF	Conditional branch
	AINsert	Create input record
	ANOP	Assembly no operation
	AREAD	Assign input record to SETC symbol
	GBLA	Define global SETA symbol
	GBLB	Define global SETB symbol
	GBLC	Define global SETC symbol
	LCLA	Define local SETA symbol
	LCLB	Define local SETB symbol
	LCLC	Define local SETC symbol
	MHELP	Trace macro flow
	MNOTE	Generate message
	SETA	Set arithmetic variable symbol
	SETAF	Set arithmetic variable symbol from external function
	SETB	Set binary variable symbol
SETC	Set character variable symbol	
SETCF	Set character variable symbol from external function	
Macro definition	MACRO	Macro definition header
	MEND	Macro definition trailer
	MEXIT	Macro expansion exit

Source: SC26-4940.

Extended-Mnemonic Instructions for Branch on Condition

Use	Extended Mnemonic* (RX or RR)	Meaning	Machine Instr.* (RX or RR)
Control	B or BR	Unconditional branch	BC or BCR 15,
	NOP or NOPR	No operation	BC or BCR 0,
After Compare Instructions (A:B)	BH or BHR	Branch on A High	BC or BCR 2,
	BL or BLR	Branch on A Low	BC or BCR 4,
	BE or BER	Branch on A Equal B	BC or BCR 8,
	BNH or BNHR	Branch on A Not High	BC or BCR 13,
	BNL or BNLR	Branch on A Not Low	BC or BCR 11,
	BNE or BNER	Branch on A Not Equal B	BC or BCR 7,
After Arithmetic Instructions	BP or BPR	Branch on Plus	BC or BCR 2,
	BM or BMR	Branch on Minus	BC or BCR 4,
	BZ or BZR	Branch on Zero	BC or BCR 8,
	BO or BOR	Branch on Overflow	BC or BCR 1,
	BNP or BNPR	Branch on Not Plus	BC or BCR 13,
	BNM or BNMR	Branch on Not Minus	BC or BCR 11,
	BNZ or BNZR	Branch on Not Zero	BC or BCR 7,
	BNO or BNOR	Branch on No Overflow	BC or BCR 14,
After Test under Mask Instruction	BO or BOR	Branch if Ones	BC or BCR 1,
	BM or BMR	Branch if Mixed	BC or BCR 4,
	BZ or BZR	Branch if Zeros	BC or BCR 8,
	BNO or BNOR	Branch if Not Ones	BC or BCR 14,
	BNM or BNMR	Branch if Not Mixed	BC or BCR 11,
	BNZ or BNZR	Branch if Not Zeros	BC or BCR 7,

Source: SC26-4940.

* Second operand, not shown, is D₂ (X₂, B₂) for RX format and R₂ for RR format.

Extended-Mnemonic Instructions for Relative-Branch Instructions

Use	Extended Mnemonic	Meaning	Machine Instr.
General	BRU or J	Unconditional Branch Relative	BRC 15,1 ₂
Branch Rel. on Condition	BRUL or JLU JNOP*	Unconditional Branch Relative No Operation	BRCL 15,1 ₂ BRC 0,1 ₂
After Compare Instructions	BRH or JH* BRL or JL* BRE or JE* BRNH or JNH* BRNL or JNL* BRNE or JNE*	Branch Relative on A High Branch Relative on A Low Branch Relative on A Equal B Branch Relative on A Not High Branch Relative on A Not Low Branch Relative on A Not Equal B	BRC 2,1 ₂ BRC 4,1 ₂ BRC 8,1 ₂ BRC 13,1 ₂ BRC 11,1 ₂ BRC 7,1 ₂
After Arithmetic Instructions	BRP or JP* BRM or JM* BRZ or JZ* BRO or JO* BRNP or JNP* BRNM or JNM* BRNZ or JNZ* BRNO or JNO*	Branch Relative on Plus Branch Relative on Minus Branch Relative on Zero Branch Relative on Overflow Branch Relative on Not Plus Branch Relative on Not Minus Branch Relative on Not Zero Branch Relative on No Overflow	BRC 2,1 ₂ BRC 4,1 ₂ BRC 8,1 ₂ BRC 1,1 ₂ BRC 13,1 ₂ BRC 11,1 ₂ BRC 7,1 ₂ BRC 14,1 ₂
After Test under Mask Instruction	BRO or JO* BRM or JM* BRZ or JZ* BRNO or JNO* BRNM or JNM* BRNZ or JNZ*	Branch Relative if Ones Branch Relative if Mixed Branch Relative if Zeros Branch Relative if Not Ones Branch Relative if Not Mixed Branch Relative if Not Zeros	BRC 1,1 ₂ BRC 4,1 ₂ BRC 8,1 ₂ BRC 14,1 ₂ BRC 11,1 ₂ BRC 7,1 ₂
Other Branch Relative Instructions	JAS JASL JCT JCTG JXH JXHG JXLE JXLEG	Branch Relative and Save Branch Relative and Save Long Branch Relative on Count (32) Branch Relative on Count (64) Branch Relative on Index High (32) Branch Relative on Index High (64) Br. Rel. on Index Low or Equal (32) Br. Rel. on Index Low or Equal (64)	BRAS R ₁ ,1 ₂ BRASL R ₁ ,1 ₂ BRCT R ₁ ,1 ₂ BRCTG R ₁ ,1 ₂ BRXH R ₁ ,R ₃ ,1 ₂ BRXHG R ₁ ,R ₃ ,1 ₂ BRXLE R ₁ ,R ₃ ,1 ₂ BRXLG R ₁ ,R ₃ ,1 ₂

Source: SC26-4940.

* To obtain BRCL instead of BRC, add L at the end of the B mnemonic or insert L after the J of the J mnemonic. For example, change BRNZ or JNZ to BRNZL or JLNZ.

Extended-Mnemonic Suffixes for Compare-and-Branch and Compare-and-Trap Instructions

Suffix	Meaning	M ₃ Value	Suffix	Meaning	M ₃ Value
H	High	2	NH	Not High	13
L	Low	4	NL	Not Low	11
E	Equal	8	NE	Not Equal	7

Explanation:

These suffixes may be appended to the following mnemonics: CGIB, CGIJ, CGIT, CGRB, CGRJ, CGRT, CIB, CIJ, CIT, CLFIT, CLGIB, CLGIJ, CLGIT, CLGRB, CLGRJ, CLGRT, CLIB, CLIJ, CLRB, CLRJ, CLRT, CRB, CRJ, CRT. When the suffix is coded, the M₃ operand must be omitted.

Extended-Mnemonic Suffixes for Rotate-Then-Insert/AND/OR/XOR-Selected-Bits Instructions

Extended Mnemonic	Meaning
RISBGZ	Set the zero-remaining-bits control (bit 0 of the I ₄ field) to one.
RNSBGT	Set the test-results control (bit 0 of the I ₃ field) to one.
ROSBGT	Set the test-results control (bit 0 of the I ₃ field) to one.
RXSBGT	Set the test-results control (bit 0 of the I ₃ field) to one.

CNOP Alignment


Quadword															
Doubleword								Doubleword							
Fullword				Fullword				Fullword				Fullword			
Halfword		Halfword		Halfword		Halfword		Halfword		Halfword		Halfword		Halfword	
Byte	Byte	Byte	Byte	Byte	Byte	Byte	Byte	Byte	Byte	Byte	Byte	Byte	Byte	Byte	Byte
0,4		2,4		0,4		2,4		0,4		2,4		0,4		2,4	
0,8		2,8		4,8		6,8		0,8		2,8		4,8		6,8	
0,16		2,16		4,16		6,16		8,16		10,16		12,16		14,16	

Summary of Constants

Type	Implied Length, Bytes	Default Alignment	Format	Truncation/ Padding
A	4	Word	Value of address or expression	Left
AD	8	Doubleword	Value of address or expression	Left
B	-	Byte	Binary digits	Left
C	-	Byte	Characters	Right
CA	-	Byte	Characters (ASCII)	Right
CE	-	Byte	Characters (EBCDIC)	Right
CU	Even	Byte	Characters, translated to Unicode	Right
D	8	Doubleword	Long hex floating point	Right
DB	8	Doubleword	Long binary floating point	Right
DD	8	Doubleword	Long decimal floating point	Right
DH	8	Doubleword	Long hex floating point	Right
E	4	Word	Short hex floating point	Right
EB	4	Word	Short binary floating point	Right
ED	4	Word	Short decimal floating point	Right
EH	4	Word	Short hex floating point	Right
F	4	Word	Fixed-point binary	Left
FD	8	Doubleword	Fixed-point binary	Left
G	Even	Byte	Graphic (double-byte) characters	Right
H	2	Halfword	Fixed-point binary	Left
J	4	Word	Symbol naming a DXD, DSECT, or class	Left
JD	8	Doubleword	Symbol naming a DXD, DSECT, or class	Left
L	16	Doubleword	Extended hex floating point	Right
LB	16	Doubleword	Extended binary floating point	Right
LD	16	Doubleword	Extended decimal floating point	Right
LH	16	Doubleword	Extended hex floating point	Right
LQ	16	Quadword	Extended hex floating point	Right
P	-	Byte	Packed decimal	Left
Q	4	Word	Symbol naming a DXD, DSECT, or part	Left
QD	8	Doubleword	Symbol naming a DXD, DSECT, or part	Left
QY	3	Halfword	Symbol naming a DXD, DSECT, or part in long-displacement form	-
R	4	Word	PSECT address value	Left
RD	8	Doubleword	PSECT address value	Left
S	2	Halfword	Address in base-displacement form	-
SY	3	Halfword	Address in base-and-long-displacement form	-
V	4	Word	Externally defined address value	-
VD	8	Doubleword	Externally defined address value	-
X	-	Byte	Hexadecimal digits	Left
Y	2	Halfword	Value of address or expression	Left
Z	-	Byte	Zoned decimal	Left

Source: SC26-4940.

Operand of Store Clock



Note: Bit 51 of the TOD clock corresponds to one microsecond.

Operand of Store Clock Extended

Zeros	Time-of-Day (TOD) Clock	Programmable Field
0	8	112
		127

Note: Bit 51 of the TOD clock (bit 59 of the operand) corresponds to one microsecond.

Fixed Storage Locations

Area (Dec)	Addr Type	Hex Addr	Function
128-131	R	80	External-interruption parameter
132-133	R	84	CPU address associated with external interruption, or zeros
134-135	R	86	External-interruption code (see table on page 36)
136-139	R	88	SVC-interruption identification: 0-12 zeros, 13-14 ILC, 15 zero, 16-31 code
140-143	R	8C	Program-interruption identification: 0-12 zeros, 13-14 ILC, 15 zero, 16-31 code (see table on page 36)
144-147	R	90	Data-exception code: 0-23 zeros, 24-31 code (see table on page 37)
148-149	R	94	Monitor-class number: 0-7 zeros, 8-15 number
150-151	R	96	PER code: 0 successful branching, 1 instruction fetching, 2 storage alteration, 4 STURA (with 2), 3 and 5-6 zeros, 7 instruction-fetching nullification (with 1), 8-13 ATMID, 14-15 AI
152-159	R	98	PER address
160	R	A0	Exception access identification: 0-3 zeros, 4-7 access-register number
161	R	A1	PER access identification: 0-3 zeros, 4-7 access-register number
162	R	A2	Operand access identification (if page-translation exception recognized by MOVE PAGE): 0-3 R ₁ , 4-7 R ₂
163	A/R	A3	Store-status/machine-check architectural-mode identification: 0-6 zeros, 7 one
168-175	R	A8	Translation-exception identification (see table on page 38)
176-183	R	B0	Monitor code
184-187	R	B8	Subsystem-identification word: 0-12 zeros, 13-14 SSID, 15 one, 16-31 subchannel number
188-191	R	BC	I/O-interruption parameter
192-195	R	C0	I/O-interruption-identification word: 0-1 zeros, 2-4 I/O-interruption subclass, 5-31 zeros
200-203	R	C8	STFL facility list (see "Facility Indications" on page 39 for the first 32 facility bits)
232-239	R	E8	Machine-check-interruption code (see diagram on page 60)
244-247	R	F4	External-damage code (see diagram on page 60)
248-255	R	F8	Failing-storage address
272-279	R	110	Breaking-event address
288-303	R	120	Restart old PSW
304-319	R	130	External old PSW
320-335	R	140	Supervisor-call old PSW
336-351	R	150	Program old PSW
352-367	R	160	Machine-check old PSW
368-383	R	170	Input/output old PSW
416-431	R	1A0	Restart new PSW
432-447	R	1B0	External new PSW
448-463	R	1C0	Supervisor-call new PSW
464-479	R	1D0	Program new PSW
480-495	R	1E0	Machine-check new PSW
496-511	R	1F0	Input/output new PSW
4544-4607	R	11C0	Available for programming
4608-4735	A/R	1200	Store-status/machine-check floating-point-register save area
4736-4863	A/R	1280	Store-status/machine-check general-register save area
4864-4879	A/R	1300	Store-status PSW save area or machine-check fixed-logout area*
4888-4891	A	1318	Store-status prefix save area
4892-4895	A/R	131C	Store-status/machine-check floating-point-control-register save area
4900-4903	A/R	1324	Store-status/machine-check TOD-programmable-register save area
4904-4911	A/R	1328	Store-status/machine-check CPU-timer save area

Area (Dec)	Addr Type	Hex Addr	Function
4913-4919	A/R	1331	Store-status/machine-check clock-comparator bits 0-55 save area (zeros at 4912)
4928-4991	A/R	1340	Store-status/machine-check access-register save area
4992-5119	A/R	1380	Store-status/machine-check control-register save area

A Absolute address.

R Real address.

A/R A if store status; R if machine check.

* Contents may vary among models; see System Library manuals.

External-Interruption Codes

At real-storage locations 134-135 (86-87 hex)

Code (Hex)	Condition
0040	Interrupt key
1004	Clock comparator
1005	CPU timer
1200	Malfunction alert
1201	Emergency signal
1202	External call
1406	ETR
2401	Service signal

Program-Interruption Codes

At real-storage locations 142-143 (8E-8F hex)

Code (Hex)	Condition	ILC Set	Instr. Ending
0001	Operation exception	1 2 3	S
0002	Privileged-operation exception	2 3	S
0003	Execute exception	2	S
0004	Protection exception	1 2 3	S T
0005	Addressing exception	1 2 3	S T
0006	Specification exception	0 1 2 3	C S
0007	Data exception	1 2 3	C S T
0008	Fixed-point-overflow exception	1 2 3	C
0009	Fixed-point-divide exception	1 2 3	C S
000A	Decimal-overflow exception	2 3	C
000B	Decimal-divide exception	2 3	S
000C	HFP-exponent-overflow exception	1 2 3	C
000D	HFP-exponent-underflow exception	1 2 3	C
000E	HFP-significance exception	1 2	C
000F	HFP-floating-point-divide exception	1 2	S
0010	Segment-translation exception	1 2 3	N
0011	Page-translation exception	1 2 3	N
0012	Translation-specification exception	1 2 3	S
0013	Special-operation exception	1 2 3	S
0015	Operand exception	2	S
0016	Trace-table exception	1 2	N
001C	Space-switch event	0 1 2	C
001D	HFP-square-root exception	2	S
001F	PC-translation-specification exception	2	S
0020	AFX-translation exception	1 2	N
0021	ASX-translation exception	1 2	N
0022	LX-translation exception	2	N
0023	EX-translation exception	2	N
0024	Primary-authority exception	2	N
0025	Secondary-authority exception	1 2	N
0026	LFX-translation exception	2	N
0027	LSX-translation exception	2	N
0028	ALET-specification exception	1 2 3	S
0029	ALEN-translation exception	1 2 3	N
002A	ALE-sequence exception	1 2 3	N

Code (Hex)	Condition	ILC Set	Instr. Ending
002B	ASTE-validity exception	1 2 3	N
002C	ASTE-sequence exception	1 2 3	N
002D	Extended-authority exception	1 2 3	N
002E	LSTE sequence	2	N
002F	ASTE instance	1 2 3	N
0030	Stack-full exception	2	N
0031	Stack-empty exception	1 2	N
0032	Stack-specification exception	1 2	N
0033	Stack-type exception	1 2	N
0034	Stack-operation exception	1 2	N
0038	ASCE-type exception	1 2 3	N
0039	Region-first-translation exception	1 2 3	N
003A	Region-second-translation exception	1 2 3	N
003B	Region-third-translation exception	1 2 3	N
0040	Monitor event	2	C
0080	PER basic event (code may be combined with another code)	0 1 2 3	C
0080	PER nullification event	0	N
0119	Crypto-operation exception	2	N
C	Completed		
ILC	Instruction-length code		
N	Nullified		
S	Suppressed		
T	Terminated		

Data-Exception Code (DXC)

At real-storage location 147 (93 hex) and in byte 2 of floating-point-control register

Code (Hex)	Data Exception
00	Decimal operand
01	AFP register
02	BFP instruction
03	DFP instruction
08	IEEE inexact and truncated
0B	IXS inexact
0C	IEEE inexact and incremented
10	IEEE underflow, exact
13	IXS underflow, exact
18	IEEE underflow, inexact and truncated
1B	IXS underflow, inexact
1C	IEEE underflow, inexact and incremented
20	IEEE overflow, exact
23	IXS overflow, exact
28	IEEE overflow, inexact and truncated
2B	IXS overflow, inexact
2C	IEEE overflow, inexact and incremented
40	IEEE division by zero
43	IXS division by zero
80	IEEE invalid operation
83	IXS invalid operation
FF	Compare-and-trap instruction

Translation-Exception Identification

At real-storage locations 168-175 (A8-AF hex)

Inter- ruption Code (Hex)	Exception or Event	Format of Information Stored*
0004	Protection	If 61 zero: rest unpredictable If 61 one: suppression, 0-51 address; 52-53 access-exception fetch/store indication; if DAT was on, 60 one if access-list-controlled protection, 62-63 ASCE identification, rest unpredictable, location 160 valid; if DAT was off, rest unpredictable
0010	Segment translation	0-51 address; 52-53 access-exception fetch/store indication; 54-61 unpredictable, 62-63 ASCE identification
0011	Page translation	0-51 address; 52-53 access-exception fetch/store indication; 54-60 unpredictable, if 61, zero, not MOVE PAGE; if 61 one, MOVE PAGE (see location 162); 62-63 ASCE identification
001C	Space switch	From primary-space mode: 32 old primary-space-switch-event control, 33-47 zeros, 48-63 old PASN From home-space mode: 32 home-space-switch-event control, 33-63 zeros
0020	AFX translation	32-47 zeros, 48-63 address-space number
0021	ASX translation	32-47 zeros, 48-63 address-space number
0022	LX translation	32-43 zeros, 44-63 program-call number
0023	EX translation	32-43 zeros, 44-63 program-call number
0024	Primary authority	32-47 zeros, 48-63 address-space number
0025	Secondary authority	32-47 zeros, 48-63 address-space number
0026	LFX translation	When bit 44 is 0: 32-43 zeros, 44-63 program-call number. When bit 44 is 1, 32-63 program-call number
0027	LSX translation	When bit 44 is 0: 32-43 zeros, 44-63 program-call number. When bit 44 is 1, 32-63 program-call number
0038	ASCE type	0-51 address; 52-53 access-exception fetch/store indication; 54-61 unpredictable, 62-63 ASCE identification
0039	Region-first translation	0-51 address; 52-53 access-exception fetch/store indication; 54-61 unpredictable, 62-63 ASCE identification
003A	Region-second translation	0-51 address; 52-53 access-exception fetch/store indication; 54-61 unpredictable, 62-63 ASCE identification
003B	Region-third translation	0-51 address; 52-53 access exception fetch/store indication; 54-61 unpredictable, 62-63 ASCE identification

* Bits 0-31 (bytes 168-171) unchanged if not described.

Facility Indications

Stored at real-storage locations 200-203 (C8-CB hex) by STFL; stored at second-operand location by STFLE.

Bit	Meaning when Bit is One
0	The instructions marked "N3" in the instruction-summary figures in Chapters 7 and 10 are installed.
1	The z/Architecture architectural mode is installed.
2	The z/Architecture architectural mode is active. When this bit is zero, the ESA/390 architectural mode is active.
3	The DAT-enhancement facility is installed in the z/Architecture architectural mode. The DAT-enhancement facility includes the INVALIDATE DAT TABLE ENTRY (IDTE) and COMPARE AND SWAP AND PURGE (CSPG) instructions.
4	INVALIDATE DAT TABLE ENTRY (IDTE) performs the invalidation-and-clearing operation by selectively clearing combined region-and-segment-table entries when a segment-table entry or entries are invalidated. IDTE also performs the clearing-by-ASCE operation. Unless bit 4 is one, IDTE simply purges all TLBs. Bit 3 is one if bit 4 is one.
5	INVALIDATE DAT TABLE ENTRY (IDTE) performs the invalidation-and-clearing operation by selectively clearing combined region-and-segment-table entries when a region-table entry or entries are invalidated. Bits 3 and 4 are ones if bit 5 is one.
6	The ASN-and-LX reuse facility is installed in the z/Architecture architectural mode.
7	The store-facility-list-extended facility is installed.
8	The enhanced-DAT facility is installed in the z/Architecture architectural mode.
9	The sense-running-status facility is installed in the z/Architecture architectural mode.
10	The conditional-SSKE facility is installed in the z/Architecture architectural mode.
11	The configuration-topology facility is installed in the z/Architecture architectural mode.
13	The IPTE-range facility is installed in the z/Architecture architectural mode.
14	The nonquiescing key-setting facility is installed in the z/Architecture architectural mode.
16	The extended-translation facility 2 is installed.
17	The message-security assist is installed.
18	The long-displacement facility is installed in the z/Architecture architectural mode.
19	The long-displacement facility has high performance. Bit 18 is one if bit 19 is one.
20	The HFP-multiply-add/subtract facility is installed.
21	The extended-immediate facility is installed in the z/Architecture architectural mode.
22	The extended-translation facility 3 is installed in the z/Architecture architectural mode.
23	The HFP-unnormalized-extension facility is installed in the z/Architecture architectural mode.
24	The ETF2-enhancement facility is installed.
25	The store-clock-fast facility is installed in the z/Architecture architectural mode.
26	The parsing-enhancement facility is installed in the z/Architecture architectural mode.
27	The move-with-optional-specifications facility is installed in the z/Architecture architectural mode.
28	The TOD-clock-steering facility is installed in the z/Architecture architectural mode.
30	The ETF3-enhancement facility is installed in the z/Architecture architectural mode.
31	The extract-CPU-time facility is installed in the z/Architecture architectural mode.
32	The compare-and-swap-and-store facility is installed in the z/Architecture architectural mode.
33	The compare-and-swap-and-store facility 2 is installed in the z/Architecture architectural mode.
34	The general-instructions-extension facility is installed in the z/Architecture architectural mode.
35	The execute-extensions facility is installed in the z/Architecture architectural mode.
36	The enhanced-monitor facility is installed in the z/Architecture architectural mode.
37	The floating-point extension facility is installed in the z/Architecture architectural mode.
39	Assigned to IBM internal use.
40	The set-program-parameters facility is installed in the z/Architecture architectural mode.
41	The floating-point-support-enhancement facilities (FPR-GR-loading, FPS-sign-handling, and DFP-rounding) are installed in the z/Architecture architectural mode.
42	The DFP (decimal-floating-point) facility is installed in the z/Architecture architectural mode.
43	The DFP (decimal-floating-point) facility has high performance. Bit 42 is one if bit 43 is one.
44	The PFPO instruction is installed in the z/Architecture architectural mode.
45	The distinct-operands, fast-BCR-serialization, high-word, interlocked-access, load/store-on-condition, and population-count facilities are installed in the z/Architecture architectural mode.
47	The CMPSC-enhancement facility is installed in the z/Architecture architectural mode.
66	The reset-reference-bits-multiple facility is installed in the z/Architecture architectural mode.

Bit	Meaning when Bit is One
67	The CPU-measurement counter facility is installed in the z/Architecture architectural mode.
68	The CPU-measurement sampling facility is installed in the z/Architecture architectural mode.
75	The access-exception-fetch/store-indication facility is installed in the z/Architecture architectural mode.
76	The message-security-assist-extension-3 facility is installed in the z/Architecture architectural mode.
77	The message-security-assist-extension-4 facility is installed in the z/Architecture architectural mode.

Control Registers

CR	Bits	Name of Field	Associated with	Init*
0	32	Trace TOD-clock control	TOD clock	0
	33	SSM-suppression control	SSM instruction	0
	34	TOD-clock-sync control	TOD clock	0
	35	Low-address-protection control	Low-address protection	0
	36	Extraction-authority control	Instruction authorization	0
	37	Secondary-space control	Instruction authorization	0
	38	Fetch-protection-override control	Key-controlled protection	0
	39	Storage-protection-override control	Key-controlled protection	0
	40	Enhanced-DAT-enablement control	Dynamic address translation	0
	44	ASN-and-LX-reuse control	Instruction authorization	0
	45	AFP-register control	Floating point	0
	48	Malfunction-alert subclass mask	External interruptions	0
	49	Emergency-signal subclass mask	External interruptions	0
	50	External-call subclass mask	External interruptions	0
	52	Clock-comparator subclass mask	External interruptions	0
	53	CPU-timer subclass mask	External interruptions	0
	54	Service-signal subclass mask	External interruptions	0
	56	Unused (See note)		1
	57	Interrupt-key subclass mask	External interruptions	1
	58	Unused (See note)		1
59	ETR subclass mask	External interruptions	0	
61	Crypto control	Cryptography	0	
1	0-63	Primary address-space-control element	Dynamic address translation	0
	0-51	Primary region-table or segment-table origin or real-space token origin	Dynamic address translation	0
	54	Primary subspace-group control	Subspace groups	0
	55	Primary private-space control	Dynamic address translation	0
	56	Primary storage-alteration-event control	Program-event recording	0
	57	Primary space-switch-event control	Program interruptions	0
	58	Primary real-space control	Dynamic address translation	0
	60-61	Primary designation-type control	Dynamic address translation	0
62-63	Primary table length	Dynamic address translation	0	
2	33-57	Dispatchable-unit-control-table origin	Access-register translation	0
3	0-31	Secondary ASTE Instance Number	Instruction authorization	0
	32-47	PSW-key mask	Instruction authorization	0
	48-63	Secondary ASN	Address spaces	0
4	0-31	Primary ASTE Instance Number	Instruction authorization	0
	32-47	Authorization index	Instruction authorization	0
	48-63	Primary ASN	Address spaces	0
5	33-57	Primary-ASTE origin	Access-register translation	0
6	32-39	I/O-interruption subclass mask	I/O interruptions	0


CR	Bits	Name of Field	Associated with	Init*
7	0-63	Secondary address-space-control element	Dynamic address translation	0
	0-51	Secondary region-table or segment-table origin or real-space token origin	Dynamic address translation	0
	54	Secondary subspace-group control	Subspace groups	0
	55	Secondary private-space control	Dynamic address translation	0
	56	Secondary storage-alteration-event control	Program-event recording	0
	58	Secondary real-space control	Dynamic address translation	0
	60-61	Secondary designation-type control	Dynamic address translation	0
	62-63	Secondary table length	Dynamic address translation	0
8	16-31	Enhanced-monitor masks	MONITOR CALL instruction	0
	32-47	Extended authorization index	Access-register translation	0
	48-63	Monitor masks	MONITOR CALL instruction	0
9	32	Successful-branching-event mask	Program-event recording	0
	33	Instruction-fetching-event mask	Program-event recording	0
	34	Storage-alteration-event mask	Program-event recording	0
	36	Store-using-real-address-event mask	Program-event recording	0
	39	Instruction-fetching-nullification-event mask	Program-event recording	0
	40	Branch-address control	Program-event recording	0
	42	Storage-alteration-space control	Program-event recording	0
10	0-63	PER starting address	Program-event recording	0
11	0-63	PER ending address	Program-event recording	0
12	0	Branch-trace control	Tracing	0
	1	Mode-trace control	Tracing	0
	2-61	Trace-entry address	Tracing	0
	62	ASN-trace control	Tracing	0
	63	Explicit-trace control	Tracing	0
13	0-63	Home address-space-control element	Dynamic address translation	0
	0-51	Home region-table or segment-table origin or real-space token origin	Dynamic address translation	0
	54	Home subspace-group control	Subspace groups	0
	55	Home private-space control	Dynamic address translation	0
	56	Home storage-alteration-event control	Program-event recording	0
	57	Home space-switch-event control	Program interruptions	0
	58	Home real-space control	Dynamic address translation	0
	60-61	Home designation-type control	Dynamic address translation	0
	62-63	Home table length	Dynamic address translation	0
14	32	Unused (See note)		1
	33	Unused (See note)		1
	35	Channel-report-pending subclass mask	I/O machine-check handling	0
	36	Recovery subclass mask	Machine-check handling	0
	37	Degradation subclass mask	Machine-check handling	0
	38	External-damage subclass mask	Machine-check handling	1
	39	Warning subclass mask	Machine-check handling	0
	42	TOD-clock-control-override control	TOD clock	0
	44	ASN-translation control	Instruction authorization	0
45-63	ASN-first-table origin	ASN translation	0	
15	0-60	Linkage-stack-entry address	Linkage-stack operations	0

* Value after initial CPU reset.

Note: This bit is not used but is initialized to one for consistency with the System/370 definition.

- 16-17 xx Real mode (T = 0)
 - 00 Primary-space mode (T = 1)
 - 01 Access-register mode (T = 1)
 - 10 Secondary-space mode (T = 1)
 - 11 Home-space mode (T = 1)
- 18-19 (CC) Condition code
- 20 Fixed-point-overflow mask
- 21 Decimal-overflow mask
- 22 HFP-exponent-underflow mask
- 23 HFP-significance mask
- 31/32 Extended/basic addressing mode
 - 00 24-bit mode
 - 01 31-bit mode
 - 10 Invalid
 - 11 64-bit mode


ESA/390 PSW

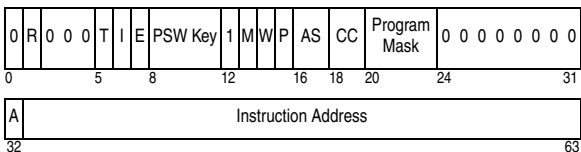

- | Bit | Meaning |
|-----|--------------------------------|
| 12 | One indicates ESA/390 |
| 32 | (A = 1) 31-bit addressing mode |

Dynamic Address Translation


Virtual-Address Format

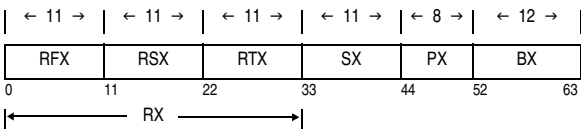

- | Field | Meaning |
|-------|------------------------------------|
| RX | Region index (region = 2G bytes) |
| RFX | Region first index |
| RSX | Region second index |
| RTX | Region third index |
| SX | Segment index (segment = 1M bytes) |
| PX | Page index (page = 4K bytes) |
| BX | Byte index |


Address-Space-Control Element (ASCE)

Region-Table or Segment-Table Designation (RTD or STD)



- | Bit | Meaning |
|-------|--|
| 54 | (G) Subspace-group control |
| 55 | (P) Private-space control |
| 56 | (S) Storage-alteration-event control |
| 57 | (X) Space-switch-event control |
| 58 | (R) Real-space control (R = 0) |
| 60-61 | (DT) Designation-type control <ul style="list-style-type: none"> 11 Region-first-table 10 Region-second-table 01 Region-third-table 00 Segment-table |
| 62-63 | (DL) Designation length (x 4K bytes) |

Real-Space Designation (RSD)



Bit Meaning

58 (R) Real-space control (R = 1)


Note: Other bits are as in RTD or STD.

Table Values


Table	Increment	Incr. Size	Incr. Entries	Max. Size	Max. Entries	Max Table Maps	
						Regions	Bytes
Region First	1-4	4KB	512	16KB	2K	8G	16E = 16×2^{60}
Region Second	1-4	4KB	512	16KB	2K	4M	8P = 8×2^{50}
Region Third	1-4	4KB	512	16KB	2K	2K	4T = 4×2^{40}
Segment	1-4	4KB	512	16KB	2K	1	2G = 2×2^{30}
Page	1	2KB	256	2KB	256	—	1M = 2^{20}

Region-Table Entry (RTE)


Region-First-Table Entry (RFTE)



Region-Second-Table Entry (RSTE)



Region-Third-Table Entry (RTTE)



Bit Meaning

54 DAT protection bit

56-57 (TF) Table offset (for next-lower-level table)

58 (I) Invalid bit (for set of regions in RFTE or RSTE, or for region in RTTE)

60-61 (TT) Table-type bits (for this table)


11=Region first table

10=Region second table


01=Region third table

62-63 (TL) Table length (for next-lower-level table) (x 4K bytes)

Segment-Table Entry (STE, FC=0)




Segment-Table Entry (STE, FC=1)



Bit	Meaning
47	(AV) Access-control (ACC) and fetch-protection (F) validity bit
48-51	(ACC) Access-control bits
52	(F) Fetch-protection bit
53	(FC) Format control
54	(P) DAT-protection bit
55	(CO) Change-bit override
58	(I) Segment-invalid bit
59	(C) Common-segment bit
60-61	(TT) Table-type bits (for this table): 00=Segment table


Page-Table Entry (PTE)




Bit	Meaning
53	(I) Page-invalid bit
54	(P) Page-protection bit
55	(CO) Change-bit override

ASN Translation

Address-Space Number (ASN)




ASN-First-Table Entry




Bit	Meaning
0	(I) AFX-invalid bit

ASN-Second-Table Entry (ASTE)


Byte
(Hex)

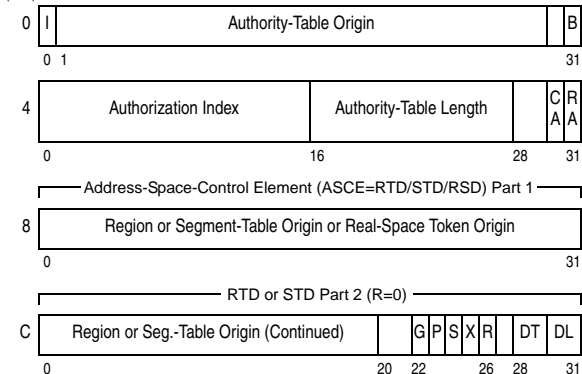

Program-Call Number (32-Bit, Bit 44=1)




Linkage-Table Entry (LTE)





Bit	Meaning
0	(I) LX-invalid bit
26-31	(ETL) Entry-table length (x 128 bytes)

Linkage-First-Table Entry (LFTE)



Bit	Meaning
0	(I) LFX-invalid bit

Linkage-Second-Table Entry (LSTE)





Bit	Meaning
0	(I) LSX-invalid bit
26-31	(ETL) Entry-table length (x 128 bytes)






Entry-Table Entry (ETE)


Byte
(Hex)

If Bit 10.1 (G) Is Zero



If Bit 10.1 (G) Is One



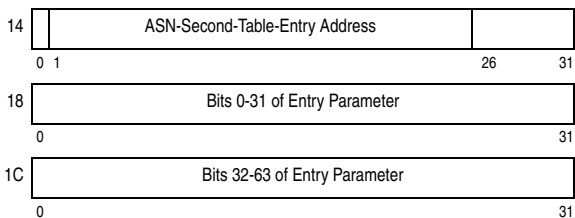


Byte.Bit Meaning

- 4.0 (A) Entry addressing mode
- 4.31 (P) Entry problem state
- 10.0 (T) PC-type bit (zero: basic; one: stacking)
- 10.1 (G) Entry extended addressing mode
- 10.3 (K) PSW-key control (zero: unchanged; one: replace if stacking)
- 10.4 (M) PSW-key-mask control (zero: Or; one: replace if stacking)
- 10.5 (E) EAX control (zero: unchanged; one: replace if stacking)
- 10.6 (C) Address-space-control control
- 10.7 (S) Secondary-ASN control
- 10.8-11 (EK) Entry key

Access-Register Translation

Access-List-Entry Token (ALET)





Bit Meaning

- 7 (P) Primary-list bit (zero: use DUCT; one: use primary ASTE)
- 8-15 (ALESN) Access-list-entry sequence number



Dispatchable-Unit-Control Table (DUCT)

Byte (Hex)




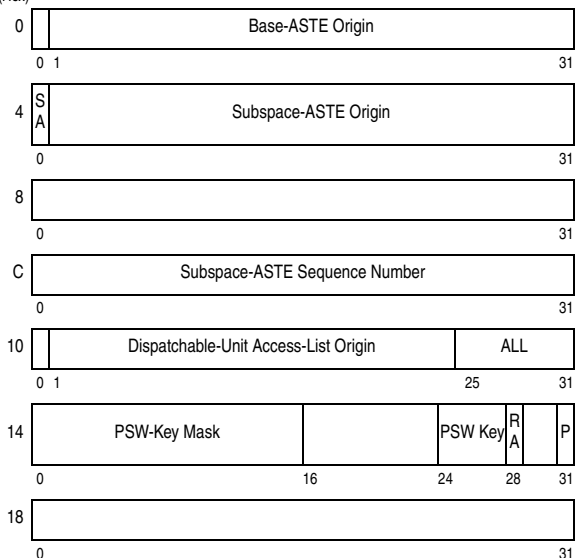




In 24-Bit or 31-Bit Addressing Mode







In 64-Bit Addressing Mode



Byte.Bit Meaning

- 4.0 (SA) Subspace-active bit
- 10.25-31 (ALL) Access-list length (x 128 bytes)
- 14.28 (RA) Reduced-authority bit
- 14.31 (P) Problem-state bit
- 2C.31 (E) TRAP-enabled bit
- /// Available for programming

Access-List Entry (ALE)



Bit Meaning

- 0 (I) ALEN-invalid bit
- 6 (FO) Fetch-only bit
- 7 (P) Private bit
- 8-15 (ALESN) Access-list-entry sequence number

Linkage-Stack Entries

Entry Descriptor

U	Entry Type	Section ID	Remaining Free Space
0	1	8	16
Next-Entry Size			
32		48	
		63	

Bit	Meaning
0	(U) Unstack-suppression bit
1-7	Entry type: Header entry = 0001001 binary Trailer entry = 0001010 binary Branch state entry = 0001100 binary Program-call state entry = 0001101 binary Available for program use = 1xxxxxx binary

Header Entry (Entry Type 0001001)

Bits 0-31 of Backward Stack-Entry Address			
0		31	
Bits 32-60 of Backward Stack-Entry Address			B
32		61	63
Entry Descriptor (First Half)			
64		95	
Entry Descriptor (Second Half)			
96		127	

Bit	Meaning
63	(B) Backward stack-entry validity bit




Trailer Entry (Entry Type 0001010)

Bits 0-31 of Forward-Section-Header Address			
0		31	
Bits 32-60 of Forward-Section-Header Address			F
32		61	63
Entry Descriptor (First Half)			
64		95	
Entry Descriptor (Second Half)			
96		127	


Bit	Meaning
63	(F) Forward-section validity bit

Branch State Entry (Entry Type 0001100) and Program-Call State Entry (Entry Type 0001101)


Byte
(Hex)




In a Branch State Entry Made in 24-Bit or 31-Bit Mode









In a Branch State Entry Made in 64-Bit Mode




In a Program-Call State Entry Made on a Call to 24-Bit or 31-Bit Mode



In a Program-Call State Entry Made on a Call to 64-Bit Mode



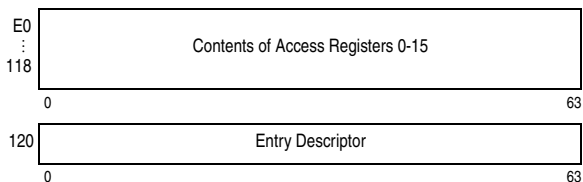


Byte.Bit **Meaning**
 90.32 (A) Addressing mode (in branch state entry)

Trapping

Trap Control Block


Byte
(Hex)

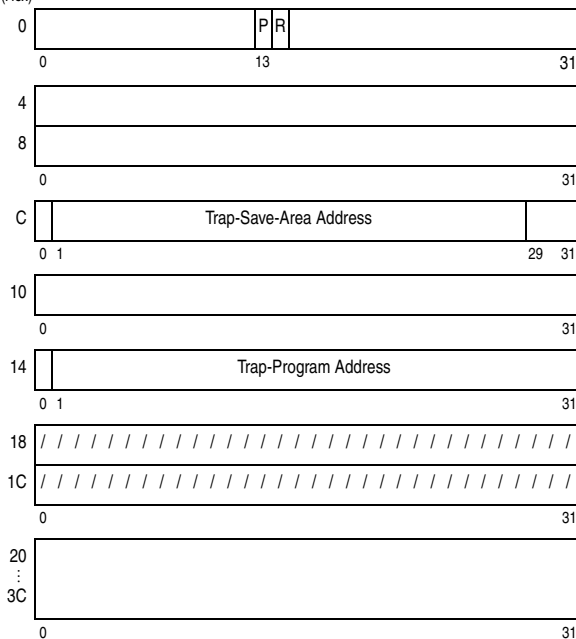


Byte.Bit **Meaning**
 0.13 (P) PSW control (zero: PSW.31 must be zero, ESA/390 PSW stored; one: z/Architecture PSW stored)
 0.14 (R) General-register control (zero: bits 32-63 stored; one: bits 0-63 stored)
 /// Available for programming

Trap Save Area


Byte
(Hex)




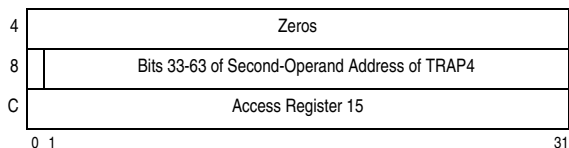


PSW Values

If z/Architecture PSW Stored

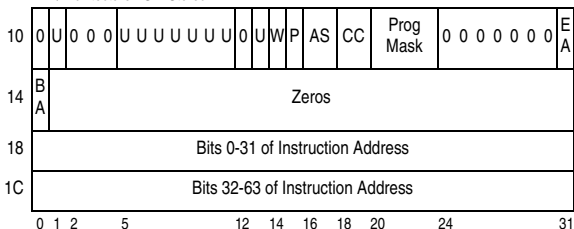

If ESA/390 PSW Stored

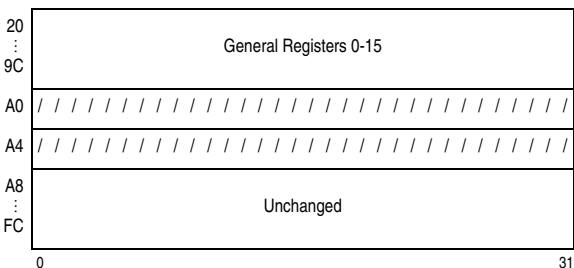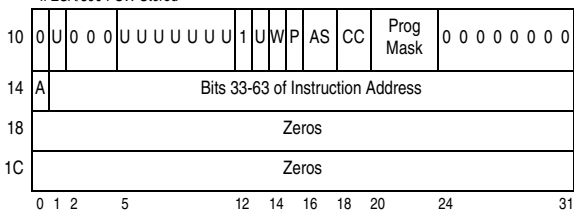

Byte.Bit	Meaning
0.0	(E) TRAP was target of EXECUTE
0.1	(W) TRAP is TRAP4 (not TRAP2)
0.13-14	(IL) Instruction-length code
10-1F	PSW values (see PSW on page 42)
U	Unpredictable
///	Available for programming

Trace-Entry Formats

Identification of Trace Entries

Trace-Entry Bits			Trace Entry	
0-7	8-11	12-15	Type	Format
00000000			Branch	1
00010000		000N	Set Secondary ASN	1
00100001			Program Call	1 ¹
00100010			Program Call	2 ¹

Trace-Entry Bits			Trace Entry	
0-7	8-11	12-15	Type	Format
00100001		0	Program Call	3 ¹
00100010		0	Program Call	4 ¹
00100010		100E	Program Call	5 ¹
00100010		101E	Program Call	6 ¹
00100011		111E	Program Call	7 ¹
00110001		000N	Program Transfer	1
00110001		100N	Program Transfer	2
00110010		0000	Program Return	1
00110010		0010	Program Return	2
00110010		1000	Program Return	4
00110010		1010	Program Return	5
00110010		110N	Program Transfer	3
00110011		0011	Program Return	3
00110011		1011	Program Return	6
00110011		1100	Program Return	7
00110011		1110	Program Return	8
00110100		1111	Program Return	9
01000001			Branch in Subspace Group	1
01000010			Branch in Subspace Group	2
01010001	0010		Mode Switch	2
01010001	0011		Mode Switch	1
01010001	1010		Mode-Switching Branch	1
01010001	1011		Mode-Switching Branch	2
01010010	0110		Mode Switch	3
01010010	1100		Branch	3
01010010	1111		Mode-Switching Branch	3
0111	0		Trace	1
0111	1		Trace	2
1			Branch	

¹ Format-1 and -2 entries are made when the ASN-and-LX-reuse facility (ALRF) is not enabled. Entries of formats 3-7 are made when the facility is enabled.

E Indicates, when one, that the extended-addressing-mode bit, PSW bit 31, was set to one.

N Indicates, when one, that an entry was made because of PTI or SSAIR.

Branch


F1 (Branch, RP, or TRAP2/4 to 24-Bit Mode)

00000000	Bits 40-63 of Branch Address
0	31
8	

F2 (Branch, RP, or TRAP2/4 to 31/64-Bit Mode)

1	Bits 33-63 of Branch Address
0	31


F3 (Branch, RP, or TRAP2/4 to 64-Bit Mode)

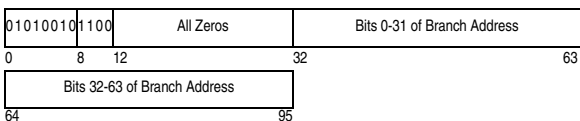


Note: "Branch" is BAKR, BALR, BASR, BASSM, BSA, or BSG.

Branch in Subspace Group (if ASN Tracing on)

F1 (in 24/31-Bit Mode)




F2 (in 64-Bit Mode)

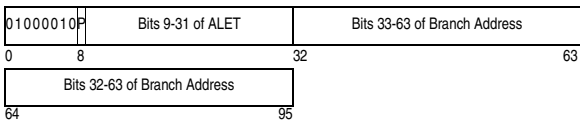


Mode Switch


F1 (BASSM, BSM, PC, PR, RP, or SAM64 from 24/31-Bit to 64-Bit Mode)



F2 (BASSM, BSM, PC, PR, RP, SAM24/31 from 64-Bit to 24/31-Bit Mode)




F3 (BASSM, BSM, PC, PR, RP, SAM24/31 from 64-Bit to 24/31-Bit Mode)

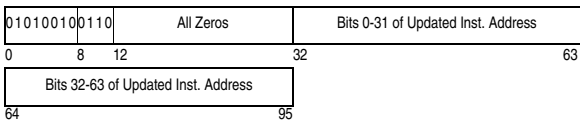


Mode-Switching Branch


F1 (BASSM or RP from 64-Bit to 24/31-Bit Mode)



F2 (BASSM or RP from 24/31-Bit to 64-Bit Mode)




F3 (BASSM or RP from 24/31-Bit to 64-Bit Mode)

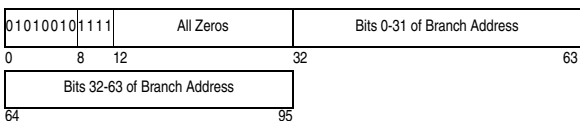


Program Call


F1 (in 24/31-Bit Mode, ALRF Not Enabled)




F2 (in 64-Bit Mode, ALRF Not Enabled)

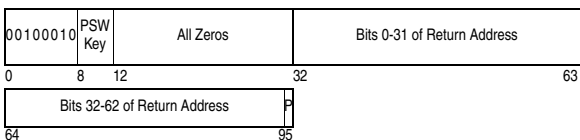


F3 (in 24/31-Bit Mode, ALRF Enabled, 20-Bit PC Number)




F4 (in 64-Bit Mode, ALRF Enabled, 20-Bit PC Number)

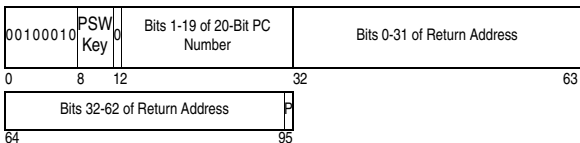


F5 (in 24/31-Bit Mode, ALRF Enabled, 32-Bit PC Number)

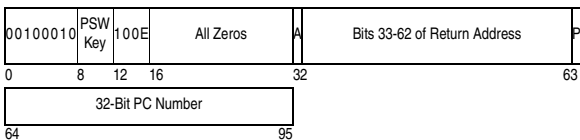

F6 (in 64-Bit Mode, ALRF Enabled, 32-Bit PC Number, Bits 0-31 of Return Address All Zeros)

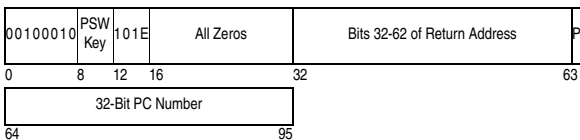


F7 (in 64-Bit Mode, ALRF Enabled, 32-Bit PC Number, Bits 0-31 of Return Address Not All Zeros)

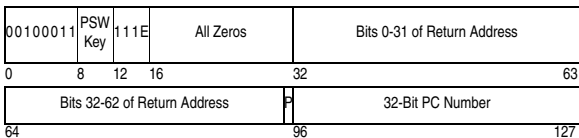


Program Return


F1 (in 24/31-Bit to 24/31-Bit Mode)

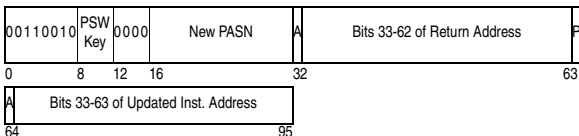


F2 (in 64-Bit to 24/31-Bit Mode)

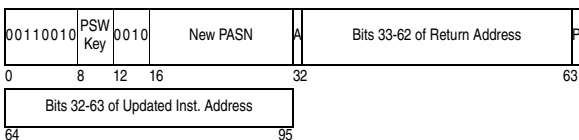


F3 (in 64-Bit to 24/31-Bit Mode)

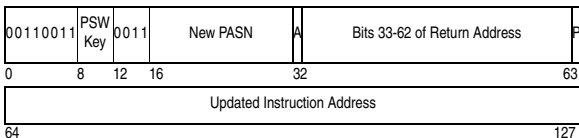


F4 (in 24/31-Bit to 64-Bit Mode)

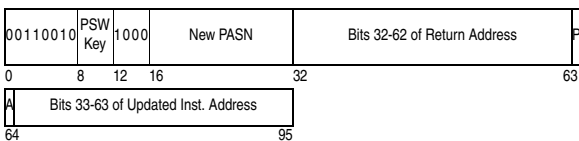


F5 (in 64-Bit to 64-Bit Mode)

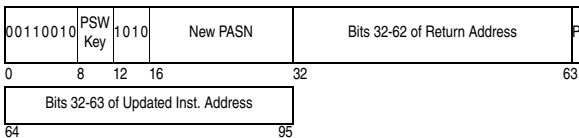


F6 (in 64-Bit to 64-Bit Mode)

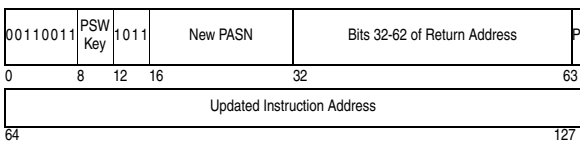


F7 (in 24/31-Bit to 64-Bit Mode)

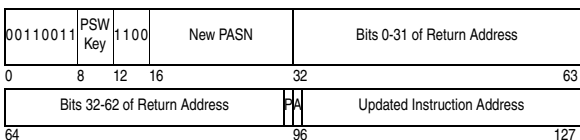

F8 (in 64-Bit to 64-Bit Mode)

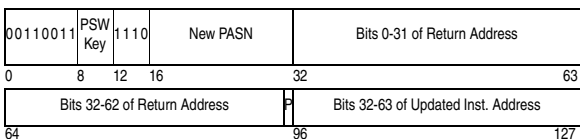


F9 (in 64-Bit to 64-Bit Mode)

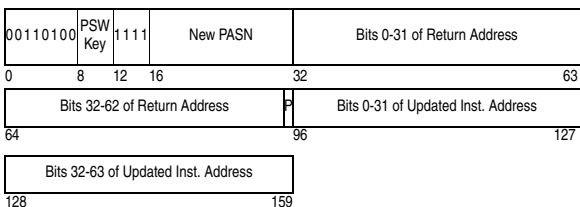


Program Transfer


F1 (in 24/31-Bit Mode)



F2 (in 64-Bit Mode, Bits 0-31 of R₂ All Zeros)




F3 (in 64-Bit Mode, Bits 0-31 of R₂ Not All Zeros)

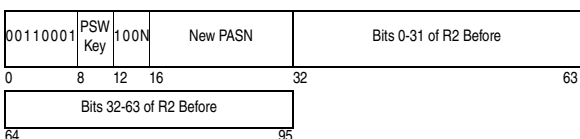


Set Secondary ASN

F1




Trace

F1 (TRACE)

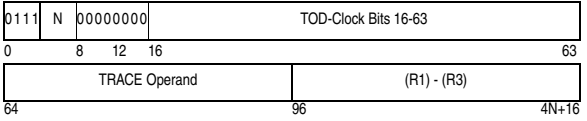

F2 (TRACG)

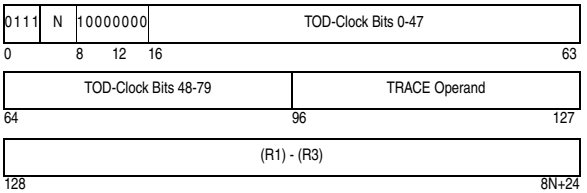

Bit **Meaning**

4-7 (N) One less than the number of registers in the trace entry.

Machine-Check Interruption Code

At real-storage locations 232-239 (E8-EF hex)

S	P	S	C	E	D	C	C			S	D	W	M	P	I	E	G	C																	
D	D	R	D	D	G	W	P	S	P	K	0	0	B	0	S	E	C	K	E	S	P	S	M	A	F	A	0	C	F	P	R	R	0	S	T
0			4			8					14		16												24		26								31

I	A							P																											
E	R	D	A	0	0	0	0	0	0	R	F	C	A	P	0	C	T	C	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0
32			35					40		42					46		48										56								63

Bit	Meaning
0	(SD) System damage
1	(PD) Instruction-processing damage
2	(SR) System recovery
4	(CD) Timing-facility damage
5	(ED) External damage
7	(DG) Degradation
8	(W) Warning
9	(CP) Channel report pending
10	(SP) Service-processor damage
11	(CK) Channel-subsystem damage
14	(B) Backed up
16	(SE) Storage error uncorrected
17	(SC) Storage error corrected
18	(KE) Storage-key error uncorrected
19	(DS) Storage degradation
20	(WP) PSW-MWP validity
21	(MS) PSW mask and key validity
22	(PM) PSW program-mask and condition-code validity
23	(IA) PSW-instruction-address validity
24	(FA) Failing-storage-address validity
26	(EC) External-damage-code validity
27	(FP) Floating-point-register validity
28	(GR) General-register validity
29	(CR) Control-register validity
31	(ST) Storage logical validity
32	(IE) Indirect storage error
33	(AR) Access-register validity
34	(DA) Delayed-access exception
42	(PR) TOD-programmable-register validity
43	(FC) Floating-point-control-register validity
44	(AP) Ancillary report
46	(CT) CPU-timer validity
47	(CC) Clock-comparator validity

External-Damage Code

At real-storage address 244-247 (F4-F7 hex)

0	0	0	0	0	0	0	0	X																												
								N	X	F	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0		
0								8		10																										31

Bit	Meaning
8	(XN) Expanded storage not operational
9	(XF) Expanded-storage control failure

Operation-Request Block (ORB)

Command-Mode ORB

Word

0	Interruption Parameter																															
1	Key	S	C	M	Y	F	P	I	A	U	B	H	T	LPM								L	D	0	0	0	0	0	0	0	0	X
2	0	Channel-Program Address																														
3	CSS Priority							Reserved							CU Priority							Reserved										
4	Reserved																															
5	Reserved																															
6	Reserved																															
7	Reserved																															
	0	8							16							24							31									

Transport-Mode ORB

Word

0	Interruption Parameter																																
1	Key	0	0	0	0	0	0	0	0	0	0	0	0	B	0	0	LPM								0	0	0	0	0	0	0	0	X
2	0	Channel-Program Address																															
3	CSS Priority							Reserved							Reserved for Pgm.							Reserved											
4	Reserved																																
5	Reserved																																
6	Reserved																																
7	Reserved																																
	0	8							16							24							31										

Word.Bit

Meaning

1.0-3	(Key) Subchannel key
1.4	(S) Suspend control
1.5	(C) Streaming-mode control
1.6	(M) Modification control
1.7	(Y) Synchronization control
1.8	(F) CCW-format control
1.9	(P) Prefetch control
1.10	(I) Initial-status-interruption control
1.11	(A) Address-limit-checking control
1.12	(U) Suppress-suspended-interruption control
1.13	(B) Channel-Program Type
1.14	(H) Format-2-IDAW control
1.15	(T) 2K-IDAW control
1.16-23	(LPM) Logical-path mask
1.24	(L) Incorrect-length-suppression mode
1.25	(D) Modified-CCW-indirect-data-addressing control
1.31	(X) ORB-extension control
3.0-7	Channel-subsystem priority
3.16-23	Control-unit priority

Channel-Command Word (CCW)

Format-0 CCW

Command Code	Data Address	
0	8	31
Flags		Byte Count
32	40	63

Bit	Meaning
32	(CD) Causes use of data-address portion of next CCW
33	(CC) Causes use of command code and data address of next CCW
34	(SLI) Causes suppression of possible incorrect-length indication
35	(Skip) Suppresses transfer of information to main storage
36	(PCI) Causes an intermediate-interruption condition to occur
37	(IDA) Causes bits 8-31 of CCW to specify location of first IDAW
38	(Suspend) Causes suspension before execution of this CCW
39	(MIDA) Causes bits 8-31 of CCW to specify location of first MIDAW

Format-1 CCW

Command Code	Flags	Byte Count
0	8	31
0	Data Address	
32	63	

Bit	Meaning
8	(CD) Causes use of data-address portion of next CCW
9	(CC) Causes use of command code and data address of next CCW
10	(SLI) Causes suppression of possible incorrect-length indication
11	(Skip) Suppresses transfer of information to main storage
12	(PCI) Causes an intermediate-interruption condition to occur
13	(IDA) Causes bits 33-63 of CCW to specify location of first IDAW
14	(Suspend) Causes suspension before execution of this CCW
15	(MIDA) Causes bits 33-63 of CCW to specify location of first MIDAW

Indirect-Data-Address Word (IDAW)


Format-1 IDAW

0	Data Address
0 1	31

Format-2 IDAW

Bits 0-31 of Data Address	
0	31
Bits 32-63 of Data Address	
32	63


Modified-CCW-Indirect-Data-Address Word (MIDAW)

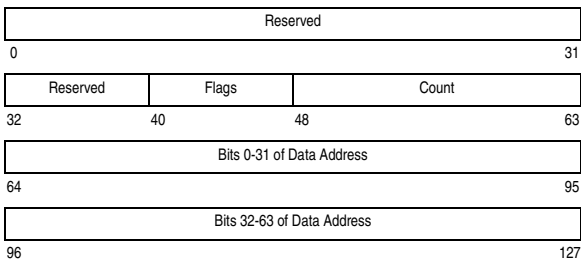

Bit	Meaning
40	Last MIDAW
41	Skip
42	Data-transfer-interruption control
43-47	Reserved


Transport Control Word (TCW)

Word

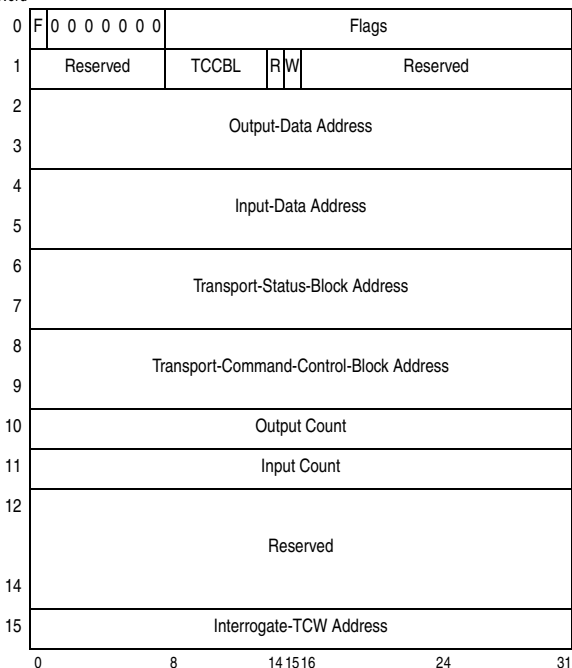


Word.Bit	Meaning
0.13	Input transport-indirect-data addressing (TIDA)
0.14	Transport-command-control-block TIDA
0.15	Output TIDA
0.16-17	TIDAW Format
1.8-13	(TCCBL) Transport-Command-Control-Block Length
1.14	(R) Read Operations
1.15	(W) Write Operations

Transport-Indirect-Data-Address Word (TIDAW)

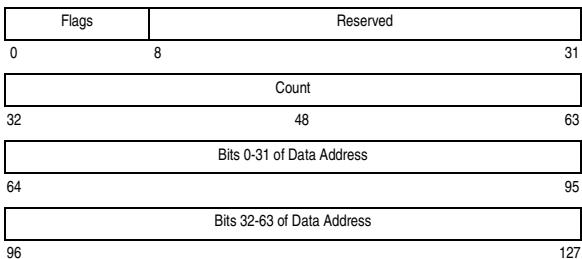


Bit	Meaning
0	Last TIDA
1	Skip
2	Data-transfer-interruption control
3	(TTIC) TIDAW Transfer In Channel
4	Insert CBC Control
5-7	Reserved

Transport Command Control Block (TCCB)

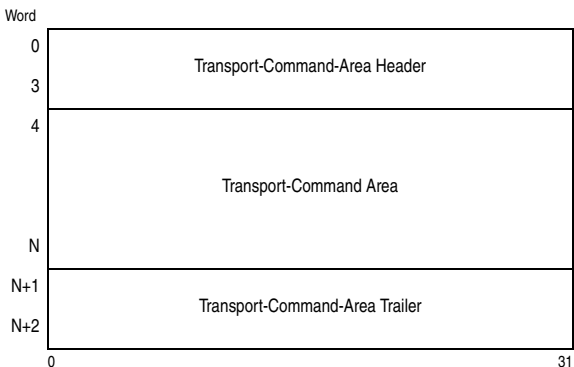


Transport Command Area Header (TCAH)

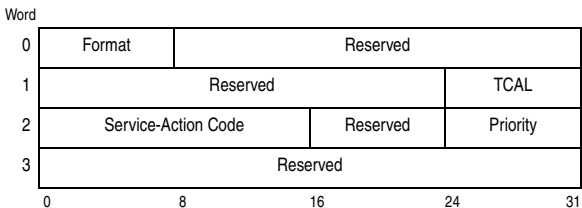


Word.Bit	Meaning
1.24-31	(TCAL) Transport-Command-Area Length

Transport Command Area (TCA)

Word

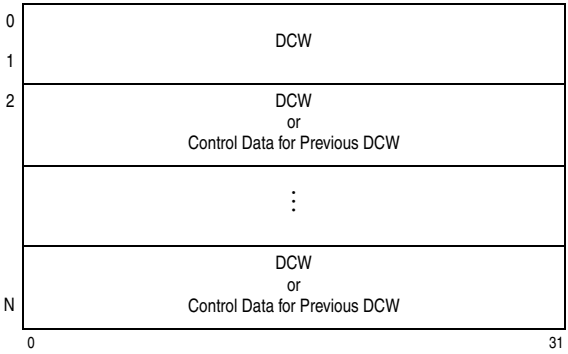

Device-Command Word (DCW)

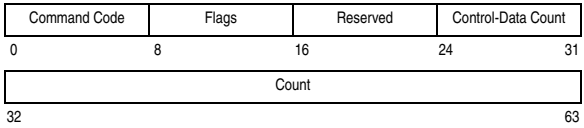


Bit

Meaning

9 (CC) Causes use of next DCW

Interrogate TCA

Word

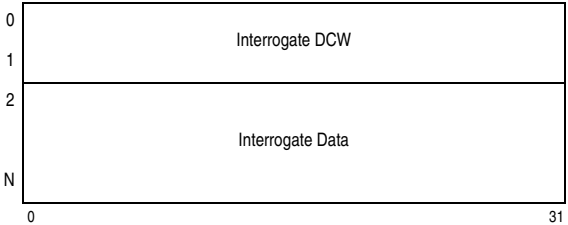

Interrogate Data

Word

0	Format	RC	RCQ	LPM	
1	PAM	PIM	Timeout		
2	Flags	Reserved			
3	Reserved				
4	Time				
5					
6	Program Identifier				
7					
8	Program-Dependent Data				
N					
	0	8	16	24	31

Word.Bit

Meaning

0.8-15	(RC) Reason code
	0 Interrogate reason not specified
	1 Timeout
0.16-23	(RCQ) Reason-code qualifier
	0 Interrogate reason qualifier not specified
	1 Primary
	2 Secondary
0.24-31	(LPM) Logical-path mask
1.0-7	(PAM) Path-available mask
1.8-15	(PIM) Path-installed mask
2.0-7	Flags
	0 Multipath mode
	1 Program path recovery
	2 Critical

Transport Command Area Trailer (TCAT)

Word


0	Reserved	
1	Transport Count	
	0	31

CBC-Offset Block (COB)


Word

0	CBC Offset 0	
1	CBC Offset 1	
2	.	
	.	
	.	
N	CBC Offset N	
Y	Reserved	
	0	31

Transport Status Block (TSB)

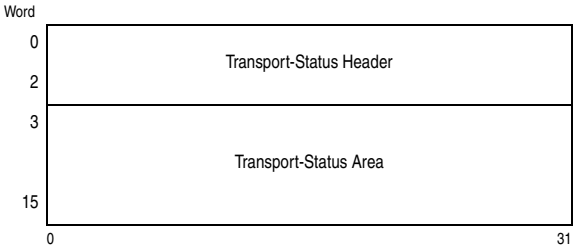


Transport Status Header (TSH)

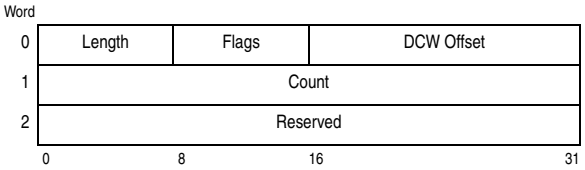

Word.Bit	Meaning
0.8	DCW-offset field valid
0.9	Count field valid
0.10	Cache miss
0.11	Time fields valid
0.13-15	Transport-Status Area (TSA) Format
	0 TSA contents have no meaning
	1 I/O-status TSA
	2 Device-detected-program-check TSA
	3 Interrogate TSA

I/O-Status TSA

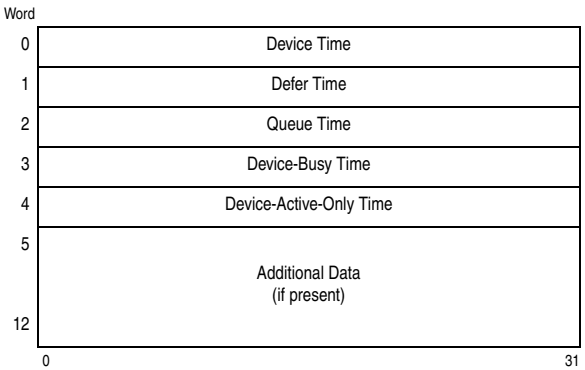

Device-Detected-Program-Check TSA

Word



Word.Bit

Meaning

0.24-31

(RC) Reason Code

- 0 No information
- 1 TCCB transport failure
 - (RCQ) Reason-code-qualifier byte 0 (1.0-7)
 - 0 No additional information
 - 1 TCCB transport size error
 - 2 TCCB CBC error
- 2 Invalid CBC detected on output data
 - RCQ word 0: Offset of first output-data byte for which error was detected
 - RCQ word 1: Offset of last output-data byte for which error was detected
- 3 Incorrect TCCB length specification
 - RCQ byte 0
 - 0 No additional information
 - 1 TCAL value not 8 greater than TCW TCCBL value
 - 2 TCAL value is less than 20 or greater than 252
- 4 TCAH specification error
 - RCQ byte 0
 - 0 No additional information
 - 1 Format field specification error
 - 2 Reserved field specification error
 - 3 Service-action-code field specification error
- 5 DCW specification error
 - RCQ byte 0
 - 0 No additional information
 - 1 Reserved field specification error
 - 2 Flags field command-chaining specification error
 - 3 Control-data-count field specification error
 - 4 TCOB location error
 - 5 TCOB duplication error
 - 6 TCOB multiple-count error
 - 7 TCOB direction error
 - 8 TCOB chaining error
 - 9 TCOB count-specification error
- 6 Transfer-direction specification error
 - RCQ byte 0
 - 0 No additional information
 - 1 Read-direction specification error
 - 2 Write-direction field specification error
- 7 Transport-count specification error
 - RCQ byte 0
 - 0 No additional information
 - 1 Read-count specification error
 - 2 Write-count specification error
- 8 Two I/O operations active
 - RCQ: No additional information
- 9 CBC-offset specification error
 - RCQ word 0: Byte offset of COB CBC-offset entry

Interrogate TSA

Word

0	Format	Flags	Control-Unit Status	Device Status	
1	Operation State	Reserved			
2	State-Dependent Information				
4					
5					Device-Level Identifier
6	Device-Dependent Information				
12					
	0	8	16	24	31


Word.Bit

Meaning

0.8	Control-unit state valid
0.9	Device-state valid
0.10	Operation-state valid
0.16-23	(CS) Control-unit state <ul style="list-style-type: none"> 0 Busy 1 Recovery 2 Interrogate maximum
0.24-31	(DS) Device-unit state <ul style="list-style-type: none"> 0 Path-Group identification (in state-dependent-information field) 1 Long busy 2 Recovery
1.0-7	(OS) Operation state <ul style="list-style-type: none"> 0 No I/O operation present. 1 An I/O operation is present and executing. 2 An I/O operation is present and awaiting completion of another operation initiated by another configuration. 3 An I/O operation is present and awaiting completion of another operation initiated for the same device extent. 4 An I/O operation is present and waiting to perform a device-dependent operation.


Subchannel-Information Block (SCHIB)

Word

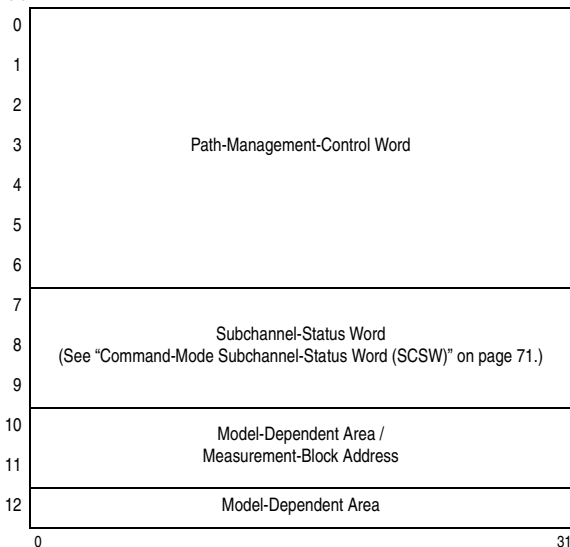

Path-Management-Control Word (PMCW)

Word

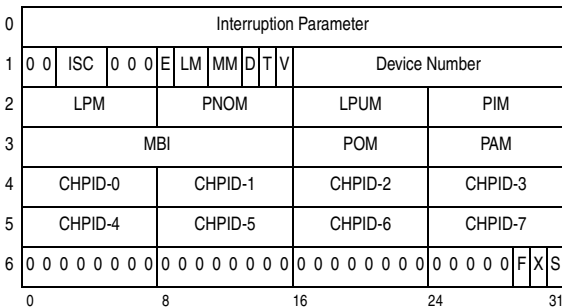


Word.Bit

Meaning


- 1.2-4 (ISC) Interruption-subclass code
- 1.8 (E) Subchannel enabled
- 1.9-10 (LM) limit mode
 - 00 No Checking
 - 01 Data address must be \geq limit
 - 10 Data address must be $<$ limit
 - 11 Reserved
- 1.11-12 (MM) Measurement-mode enable
 - 00 Neither mode enabled
 - 01 Device-connect-time-measurement enabled
 - 10 Measurement-block-update enabled
 - 11 Both modes enabled

1.13	(D) Multipath mode
1.14	(T) Timing facility available
1.15	(V) Device number valid
2.0-7	(LPM) Logical-path mask
2.8-15	(PNOM) Path-not-operational mask
2.16-23	(LPUM) Last-path-used mask
2.24-31	(PIM) Path-installed mask
3.0-15	(MBI) Measurement-block index
3.16-23	(POM) Path-operational mask
3.24-31	(PAM) Path-available mask
4.0-7	(CHPID-0) Channel-path ID for logical path 0 (typical)
6.29	(F) Measurement-block-format control
6.30	(X) Extended-measurement-word-mode enable
6.31	(S) Concurrent sense

Interrupt-Response Block (IRB)

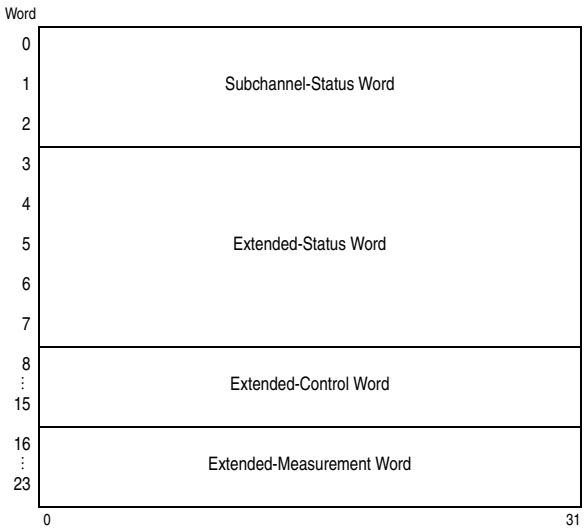

Command-Mode Subchannel-Status Word (SCSW)

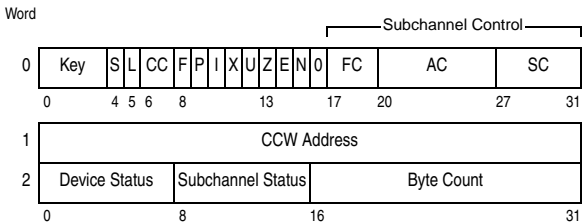


Word.Bit	Meaning
0.0-3	(Key) Subchannel key
0.4	(S) Suspend control
0.5	(L) Extended-status-word format (logout stored)
0.6-7	(CC) Deferred condition code
	00 Normal I/O interruption
	01 Status in SCSW
	10 Reserved
	11 Path not operational
0.8	(F) CCW-format control
0.9	(P) Prefetch control

0.10	(I) Initial-status-interruption control	
0.11	(X) IRB-format control	
0.12	(U) Suppress-suspended-interruption control	
0.13	(Z) Zero condition code	
0.14	(E) Extended control (information stored in ECW of IRB)	
0.15	(N) Path not operational (PNOM nonzero)	
0.17-19	(FC) Function control	
	17 (40) Start, 18 (20) Halt, 19 (10) Clear	
0.20-26	(AC) Activity control	
	20 (08) Resume pending	24 (80) Subchannel active
	21 (04) Start pending	25 (40) Device active
	22 (02) Halt pending	26 (20) Suspended
	23 (01) Clear pending	
0.27-31	(SC) Status control	
	27 (10) Alert	30 (02) Secondary
	28 (08) Intermediate	31 (01) Status pending
	29 (04) Primary	
2.0-15	Device status (0-7)	Subchannel status (8-15)
	0 (80) Attention	8 (80) Program-controlled interruption
	1 (40) Status modifier	9 (40) Incorrect length
	2 (20) Control-unit end	10 (20) Program check
	3 (10) Busy	11 (10) Protection check
	4 (08) Channel end	12 (08) Channel-data check
	5 (04) Device end	13 (04) Channel-control check
	6 (02) Unit check	14 (02) Interface-control check
	7 (01) Unit exception	15 (01) Chaining check

Transport-Mode Subchannel-Status Word (SCSW)

Word

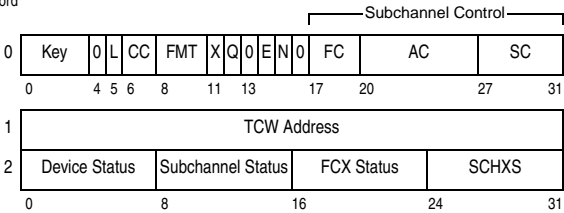

Word.Bit Meaning

0.0-3	(Key) Subchannel key
0.5	(L) Extended-status-word format (logout stored)
0.6-7	(CC) Deferred condition code
	00 Normal I/O interruption
	01 Status in SCSW
	10 Reserved
	11 Path not operational
0.8-10	(FMT) Format
0.11	(X) IRB-format control
0.12	(Q) Interrogate complete
0.14	(E) Extended control (information stored in ECW of IRB)
0.15	(N) Path not operational (PNOM nonzero)
0.17-19	(FC) Function control
	17 (40) Start, 18 (20) Halt, 19 (10) Clear
0.20-26	(AC) Activity control
	21 (04) Start pending
	22 (02) Halt pending
	23 (01) Clear pending
	25 (40) Device active
0.27-31	(SC) Status control
	27 (10) Alert
	28 (08) Intermediate
	29 (04) Primary
2.0-15	Device status (0-7)
	0 (80) Attention
	2 (20) Control-unit end
	3 (10) Busy
	4 (08) Channel end
	8 (80) Program-controlled interruption
	9 (40) Incorrect length
	10 (20) Program check
	11 (10) Protection check
	12 (08) Channel-data check

	5 (04) Device end	13 (04) Channel-control check
	6 (02) Unit check	14 (02) Interface-control check
	7 (01) Unit exception	15 (01) Channel-subsystem retry failed
2.16-23	FCX status (16-23)	
	23 (01) TSB valid	
2.24-31	(SCHXS) Subchannel-extended status	
	24 (80) (F) Interrogate failed	
	25-31 (SESQ) SCHSX qualifier	
	0 No status available.	
	1 Storage-request limit exceeded.	
	2 Program check when not an interrogate operation, TCW read/write data count not zero, and CE only or CE+DE only status received.	
	3 Transport mode not supported by the I/O device.	
	4 Transport mode not supported by the selected channel path.	
	6 Program check on TCW.	
	7 Device-detected program check condition due to indeterminate cause.	
	8 Device-detected program check.	
	9 Program check on TIDAW - failing-storage-address (FSA) valid in ESW (see below) and contains TIDAW address.	
	32 TCW access exception - FSA field valid and contains TCW address.	
	33 TSB access exception - FSA field valid and contains TSB address.	
	34 TCCB access exception - FSA field valid and contains TCCB address.	
	35 TIDAW access exception - FSA field valid and contains TIDAW address.	
	36 Data access exception - FSA field valid and contains address of data.	
	64 Invalid CBC error on read data.	
	66 Link protocol error condition.	
	67 Device-level recovery operation failed.	
	68 IFCC due to failed device-level recovery operation - program, protection, or data check may also be set in subchannel status.	
	70 Invalid CBC on status portion of transport response from device.	
	71 Invalid CBC on TSB transported from device.	
	Note: If FSA field valid for cases other than noted above, FSA field contains address of current TCW.	

Extended-Status Word (ESW)

See chart on page 75 to determine the appropriate ESW format.

Format-0 ESW

Word	
0	Subchannel Logout
1	Extended-Report Word
2	Failing-Storage Address
3	
4	Secondary-CCW Address
	0 31

Information Stored in ESW

Subchannel Conditions under which ESW Is Stored by Test Subchannel Instruction						Extended-Status Word (ESW)				
Subchannel-Status Word			Path-Management-Control Word			Device-Connect-Time Measurement-Mode Active	Contents Word 0 Byte			
Status-Control Field	L Bit	Suspended Bit	Timing-Facility Bit	Device-Connect-Time Measurement-Mode Enable Bit	Format					0
A I P S X										
- - - - 0	-	*	*	*	No / Yes	U	*	*	*	*
* * 0 0 1	1	*	*	*	No / Yes	0	R	R	R	R
* * 1 * 1	1	*	*	*	No / Yes	0	R	R	R	R
1 0 0 1 1	1	*	*	*	No / Yes	0	R	R	R	R
0 0 0 0 1	0	*	*	*	No / Yes	U	*	*	*	*
0 0 0 1 1	0	*	*	*	No / Yes	3	Z	M	*	*
1 0 0 * 1	0	*	*	*	No / Yes	3	Z	M	*	*
* * 1 * 1	0	*	0	*	No / Yes	1	Z	M	Z	Z
* * 1 * 1	0	*	1	0	No / Yes	1	Z	M	Z	Z
* * 1 * 1	0	*	1	1	No	1	Z	M	Z	Z
* * 1 * 1	0	*	1	1	Yes	2	Z	M	D	D
0 1 0 0 1	0	0	*	*	No / Yes	U	*	*	*	*
0 1 0 0 1	0	1	0	*	No / Yes	1	Z	M	Z	Z
0 1 0 0 1	0	1	1	0	No / Yes	1	Z	M	Z	Z
0 1 0 0 1	0	1	1	1	No	1	Z	M	Z	Z
0 1 0 0 1	0	1	1	1	Yes	2	Z	M	D	D
0 0 0 1 1	1	These combinations do not occur.								
1 1 0 0 1	0									
* 1 0 1 1	*									

Bit Meaning

-	Not meaningful.
*	Bits may be zeros or ones.
A	Alert status.
D	Accumulated device-connect-time-interval (DCTI) value stored in bytes 2 and 3.
I	Intermediate status.
L	Extended-status-word format.
M	Last-path-used mask (LPUM) stored in byte 1.
P	Primary status.
R	Subchannel-logout information stored in bytes 0-3.
S	Secondary status.
U	No format defined.
X	Status pending.
Z	Bits are stored as zeros.

Extended-Control Word (ECW)

SCSW Bits		ERW Bit 7	ERW Bits 10-15	ECW Words 0-7
5	14			
0	0	0	Zeros	Unpredictable
0	1	1	Number of concurrent-sense bytes ^a	Concurrent-sense information ^a
1	0	0	Zeros	Unpredictable
1	1	0	Zeros	Model-dependent information
1	1	1	Number of concurrent-sense bytes	Concurrent-sense information

- a. The contents of the ECW are specified by bits 5 and 14 of word 0 of the SCSW. The combination of SCSW bit 5 zero, SCSW bit 14 one, and ERW bit 7 zero does not occur.

Extended-Measurement Word

Word

0	Device-Connect Time
1	Function-Pending Time
2	Device-Disconnect Time
3	Control-Unit-Queuing Time
4	Device-Active-Only Time
5	Device-Busy Time
6	Initial-Command-Response Time
7	Reserved

0

31

Format 0 Measurement Block

Word

0	SSCH + RSCH Count	Sample Count
1	Device-Connect Time	
2	Function-Pending Time	
3	Device-Disconnect Time	
4	Control-Unit-Queuing Time	
5	Device-Active-Only Time	
6	Device-Busy Time	
7	Initial-Command-Response Time	

0

16

31

Format 1 Measurement Block

Word

0	SSCH + RSCH Count
1	Sample Count
2	Device-Connect Time
3	Function-Pending Time
4	Device-Disconnect Time
5	Control-Unit-Queuing Time
6	Device-Active-Only Time
7	Device-Busy Time
8	Initial-Command-Response Time
9	Reserved
∴	
15	

0

31

Channel-Report Word (CRW)

0	S	R	C	RSC	A	0	ERC	Reporting-Source ID
0				4	8	10	16	31

Bit	Meaning
1	(S) Solicited CRW
2	(R) Overflow (one or more CRWs lost)
3	(C) Chaining (meaningless if bit 2 is one)
4-7	(RSC) Reporting-source code (see Reporting-Source table)
8	(A) Ancillary report
10-15	(ERC) Error-recovery code (see Error-Recovery-Code table)
16-31	Reporting-source ID (see Reporting-Source table)

Error-Recovery Codes

ERC	Condition
0 0 0 0 0 1	Available
0 0 0 0 1 0	Initialized
0 0 0 0 1 1	Temporary error
0 0 0 1 0 0	Installed parameters initialized
0 0 0 1 0 1	Terminal
0 0 0 1 1 0	Permanent error with facility not initialized
0 0 0 1 1 1	Permanent error with facility initialized
0 0 1 0 0 0	Installed parameters modified

Reporting Source

The reporting-source-ID format depends on the RSC field of the channel-report word, as follows:

RSC	Reporting Source	Reporting-Source ID
0 0 1 0	Monitoring facility	0 0 0 0 0 0 0 0 0 0 0 0 0 0 0 0
0 0 1 1	Subchannel (first or only CRW)	X X X X X X X X X X X X X X X X
0 0 1 1	Subchannel (chained CRW)	0 0 0 0 0 0 0 0 0 0 0 0 S S 0 0 0 0
0 1 0 0	Channel path	0 0 0 0 0 0 0 0 0 0 Y Y Y Y Y Y Y Y
1 0 0 1	Configuration-alert facility	0 0 0 0 0 0 0 0 0 0 Y Y Y Y Y Y Y Y
1 0 1 1	Channel subsystem	0 0 0 0 0 0 0 0 0 0 0 0 0 0 0 0

S = Subchannel-set identifier (SSID) when the MSS facility is installed and the CRW is chained immediately following a CRW for a subchannel.

X = Subchannel number

Y = Channel-path ID (CHPID)

I/O Command Codes

Standard Command-Code Assignments (CCW and DCW Bits 0-7)

x x x x	0 0 0 0	Invalid Command	m m m m	0 1 0 0	Sense
m m m m	m m 0 1	Write (a)	0 0 0 0	0 1 0 0	— Basic Sense
m m m m	m m 1 0	Read (a)	1 1 1 0	0 1 0 0	— Sense ID
0 0 0 0	0 0 1 0	— Read IPL	x x x x	1 0 0 0	Transfer in channel (c)
m m m m	m m 1 1	Control	0 0 0 0	1 0 0 0	Transfer in channel (d)
0 0 0 0	0 0 1 1	— Control no operation	m m m m	1 0 0 0	Invalid command (e)
0 1 m m	0 0 0 0	Transport (b)	m m m m	1 1 0 0	Read backwards (f)
x —	Bit Ignored		a	May designate control data in a DCW	
m —	Modifier bit for specific type of I/O device		b	DCW only	
			c	Format-0 CCW	
			d	Format-1 CCW	
			e	Format-1 CCW and nonzero m bit	
			f	CCW only	

Standard Meanings of Bits of First Sense Byte

Bit	Designation	Bit	Designation
0	Command reject	4	Data check
1	Intervention required	5	Overrun
2	Bus-out check	6	(Device dependent)
3	Equipment check	7	(Device dependent)

Character Assignments

Dec	Hex	EBCDIC ¹	ISO-8 ²
0	00	NUL	NUL
1	01	SOH	SOH
2	02	STX	STX
3	03	ETX	ETX
4	04	SEL	EOT
5	05	HT	ENQ
6	06	RNL	ACK
7	07	DEL	BEL
8	08	GE	BS
9	09	SPS	HT
10	0A	RPT	LF
11	0B	VT	VT
12	0C	FF	FF
13	0D	CR	CR
14	0E	SO	SO
15	0F	SI	SI
16	10	DLE	DLE
17	11	DC1	DC1
18	12	DC2	DC2
19	13	DC3	DC3
20	14	RES/ENP	DC4
21	15	NL	NAK
22	16	BS	SYN
23	17	POC	ETB
24	18	CAN	CAN
25	19	EM	EM
26	1A	UBS	SUB
27	1B	CU1	ESC
28	1C	IFS	IFS
29	1D	IGS	IGS
30	1E	IRS	IRS
31	1F	ITB/IUS	IUS
32	20	DS	SP
33	21	SOS	!
34	22	FS	"
35	23	WUS	#
36	24	BYP/INP	\$
37	25	LF	%
38	26	ETB	&
39	27	ESC	'
40	28	SA	(
41	29	SFE)
42	2A	SM/SW	*
43	2B	CSP	+
44	2C	MFA	,
45	2D	ENQ	-
46	2E	ACK	.
47	2F	BEL	/
48	30		0
49	31		1
50	32	SYN	2
51	33	IR	3
52	24	PP	4
53	35	TRN	5
54	36	NBS	6
55	37	EOT	7
56	38	SBS	8
57	39	IT	9
58	3A	RFF	:
59	3B	CU3	;
60	3C	DC4	<
61	3D	NAK	=
62	3E		>
63	3F	SUB	?

Dec	Hex	EBCDIC ¹	ISO-8 ²
64	40	SP	@
65	41	RSP	A
66	42	â	B
67	43	ã	C
68	44	à	D
69	45	á	E
70	46	ä	F
71	47	â	G
72	48	ç	H
73	49	ñ	I
74	4A	ç	J
75	4B	.	K
76	4C	<	L
77	4D	(M
78	4E	+	N
79	4F		O
80	50	&	P
81	51	é	Q
82	52	ê	R
83	53	ë	S
84	54	è	T
85	55	í	U
86	56	î	V
87	57	ï	W
88	58	ì	X
89	59	β	Y
90	5A	!	Z
91	5B	\$	[
92	5C	*	\
93	5D)]
94	5E	;	^
95	5F	¬	_
96	60	-	`
97	61	/	a
98	62	À	b
99	63	Á	c
100	64	Â	d
101	65	Ã	e
102	66	Ä	f
103	67	Å	g
104	68	Ç	h
105	69	Ñ	i
106	6A	:	j
107	6B	,	k
108	6C	%	l
109	6D	_	m
110	6E	>	n
111	6F	?	o
112	70	ø	p
113	71	É	q
114	72	Ê	r
115	73	Ë	s
116	74	È	t
117	75	Í	u
118	76	Î	v
119	77	Ï	w
120	78	Ì	x
121	79	´	y
122	7A	:	z
123	7B	#	{
124	7C	@	
125	7D	'	}
126	7E	=	~
127	7F	"	•

Dec	Hex	EBCDIC ¹	ISO-8 ²
128	80	Ø	
129	81	a	
130	82	b	BPH
131	83	c	NBH
132	84	d	IND
133	85	e	NEL
134	86	f	SSA
135	87	g	ESA
136	88	h	HTS
137	89	i	HTJ
138	8A	«	VTS
139	8B	»	PLD
140	8C	ð	PLU
141	8D	ý	RI
142	8E	þ	SS2
143	8F	±	SS3
144	90	°	DCS
145	91	j	PU1
146	92	k	PU2
147	93	l	STS
148	94	m	CCH
149	95	n	MW
150	96	o	SPA
151	97	p	EPA
152	98	q	SOS
153	99	r	
154	9A	ª	SCI
155	9B	º	CSI
156	9C	æ	ST
157	9D	¸	OSC
158	9E	Æ	PM
159	9F	◻	APC
160	A0	µ	RSP
161	A1	~	ı
162	A2	s	¢
163	A3	t	£
164	A4	u	◻
165	A5	v	¥
166	A6	w	ı
167	A7	x	§
168	A8	y	”
169	A9	z	©
170	AA	ı	ª
171	AB	ı	«
172	AC	Ð	¬
173	AD	Ý	SHY
174	AE	þ	®
175	AF	®	-
176	B0	^	°
177	B1	£	±
178	B2	¥	²
179	B3	.	³
180	B4	©	´
181	B5	§	µ
182	B6	¶	¶
183	B7	¼	·
184	B8	½	¸
185	B9	¾	¹
186	BA	[º
187	BB]	»
188	BC	ä	¼
189	BD	”	½
190	BE	´	¾
191	BF	x	ı

Dec	Hex	EBCDIC ¹	ISO-8 ²
192	C0	{	À
193	C1	A	Á
194	C2	B	Â
195	C3	C	Ã
196	C4	D	Ä
197	C5	E	Å
198	C6	F	Æ
199	C7	G	Ç
200	C8	H	È
201	C9	I	É
202	CA	SHY	Ê
203	CB	ô	Ë
204	CC	ö	Ì
205	CD	ò	Í
206	CE	ó	Î
207	CF	õ	Ï
208	D0	}	Ð
209	D1	J	Ñ
210	D2	K	Ò
211	D3	L	Ó
212	D4	M	Ô
213	D5	N	Õ
214	D6	O	Ö
215	D7	P	×
216	D8	Q	Ø
217	D9	R	Ù
218	DA	ı	Ú
219	DB	û	Û
220	DC	ü	Ü
221	DD	ù	Ý
222	DE	ú	Þ
223	DF	ÿ	ß
224	E0	\	à
225	E1	÷	á
226	E2	S	â
227	E3	T	ã
228	E4	U	ä
229	E5	V	å
230	E6	W	æ
231	E7	X	ç
232	E8	Y	è
233	E9	Z	é
234	EA	²	ê
235	EB	Ô	ë
236	EC	Ö	ì
237	ED	Ò	í
238	EE	Ó	î
239	EF	Õ	ï
240	F0	0	ð
241	F1	1	ñ
242	F2	2	ò
243	F3	3	ó
244	F4	4	ô
245	F5	5	õ
246	F6	6	ö
247	F7	7	÷
248	F8	8	ø
249	F9	9	ù
250	FA	³	ú
251	FB	Û	û
252	FC	Ü	ü
253	FD	Ù	ý
254	FE	Ú	þ
255	FF	EO	ÿ

Notes:

- 1 The EBCDIC characters are based on code page 037.
- 2 The ISO-8 controls are from ISO 6429, and the graphics are from ISO 8859-1. The ISO-8 graphics are code page 00819, named ISO/ANSI Multilingual.

Control Character Representations

ACK	Acknowledge	IT	Indent Tab
BEL	Bell	ITB	Intermediate Transmission Block
BS	Backspace	IUS	International Unit Separator
BYP	Bypass	LF	Line Feed
CAN	Cancel	MFA	Modify Field Attribute
CR	Carriage Return	NAK	Negative Acknowledge
CSP	Control Sequence Prefix	NBS	Numeric Backspace
CU1	Customer Use 1	NL	New Line
CU3	Customer Use 3	NUL	Null
DC1	Device Control 1	POC	Program-Operator Communication
DC2	Device Control 2	PP	Presentation Position
DC3	Device Control 3	RES	Restore
DC4	Device Control 4	RFF	Required Form Feed
DEL	Delete	RNL	Required New Line
DLE	Data Link Escape	RPT	Repeat
DS	Digit Select	SA	Set Attribute
EM	End of Medium	SBS	Subscript
ENP	Enable Presentation	SEL	Select
ENQ	Enquiry	SFE	Start Field Extended
EO	Eight Ones	SI	Shift In
EOT	End of Transmission	SM	Set Mode
ESC	Escape	SO	Shift Out
ETB	End of Transmission Block	SOH	Start of Heading
ETX	End of Text	SOS	Start of Significance
FF	Form Feed	SPS	Superscript
FS	Field Separator	STX	Start of Text
GE	Graphic Escape	SUB	Substitute
HT	Horizontal Tab	SW	Switch
IFS	Interchange File Separator	SYN	Synchronous Idle
IGS	Interchange Group Separator	TRN	Transparent
INP	Inhibit Presentation	UBS	Unit Backspace
IR	Index Return	VT	Vertical Tab
IRS	Interchange Record Separator	WUS	Word Underscore

Additional ISO-8 Control Character Representations

APC	Application Program Command	PLD	Partial Line Down
BPH	Break Permitted Here	PLU	Partial Line Up
CCH	Cancel Character	PM	Privacy Message
CSI	Control Sequence Introducer	PU1	Private Use One
DCS	Device Control String	PU2	Private Use Two
ESA	End of Selected Area	SCI	Single Character Introducer
HTJ	Character Tabulation w/ Justification	SOS	Start of String
HTS	Character Tabulation Set	SPA	Start of Guarded Area
IFS	Information Separator Four	SSA	Start of Selected Area
IGS	Information Separator Three	SS2	Single Shift Two
IND	Index	SS3	Single Shift Three
IRS	Information Separator Two	ST	String Terminator
MW	Message Waiting	STS	Set Transmit State
NBH	No Break Here	US	Information Separator One
NEL	Next Line	VTS	Line Tabulation Set
OSC	Operating System Command		

Formatting Character Representations

NSP	Numeric Space	SP	Space
RSP	Required Space	SHY	Syllable Hyphen

Two-Character BSC Data Link Controls

Function	EBCDIC	ASCII
ACK-0	DLE,X'70'	DLE,0
ACK-1	DLE,X'61'	DLE,1
WACK	DLE,X'68'	DLE,;
RVI	DLE,X'7C'	DLE,<

Commonly Used Editing Pattern Characters

Code (Hex)	Meaning	Code (Hex)	Meaning
20	Digit selector	5B	Dollar sign
21	Start of significance	5C	Asterisk
22	Field separator	6B	Comma
40	Blank	C3D9	CR (credit)
4B	Period	C4C2	DB (debit)

ANSI-Defined Printer Control Characters

(A in RECFM field of DCB)

Code	Action before Printing Record
blank	Space 1 line
0	Space 2 lines
-	Space 3 lines
+	Suppress space
1	Skip to line 1 on new page

Hexadecimal and Decimal Conversion

From hex: locate each hex digit in its corresponding column position and note the decimal equivalents. Add these to obtain the decimal value.

From decimal: (1) locate the largest decimal value in the table that will fit into the decimal number to be converted, and (2) note its hex equivalent and hex column position. (3) Find the decimal remainder. Repeat the process on this and subsequent remainders.

Note: Hexadecimal equivalents of all numbers from 0 to 255 are listed in the code tables.

Powers of 2 and 16

m	n	2^m and 16^n	Symbol
0	0	1	
1		2	
2		4	
3		8	
4	1	16	
5		32	
6		64	
7		128	
8	2	256	
9		512	
10		1 024	K (kilo)
11		2 048	
12	3	4 096	
13		8 192	
14		16 384	
15		32 768	
16	4	65 536	
17		131 072	
18		262 144	
19		524 288	
20	5	1 048 576	M (mega)
21		2 097 152	
22		4 194 304	
23		8 388 608	
24	6	16 777 216	
25		33 554 432	
26		67 108 864	
27		134 217 728	
28	7	268 435 456	
29		536 870 912	
30		1 073 741 824	G (giga)
31		2 147 483 648	
32	8	4 294 967 296	
33		8 589 934 592	
34		17 179 869 184	
35		34 359 738 368	
36	9	68 719 476 736	
37		137 438 953 472	
38		274 877 906 944	
39		549 755 813 888	
40	10	1 099 511 627 776	T (tera)
41		2 199 023 255 552	
42		4 398 046 511 104	
43		8 796 093 022 208	
44	11	17 592 186 044 416	
45		35 184 372 088 832	
46		70 368 744 177 664	
47		140 737 488 355 328	
48	12	281 474 976 710 656	
49		562 949 953 421 312	
50		1 125 899 906 842 624	P (peta)
51		2 251 799 813 685 248	
52	13	4 503 599 627 370 496	
53		9 007 199 254 740 992	
54		18 014 398 509 481 984	
55		36 028 797 018 963 968	
56	14	72 057 594 037 927 936	
57		144 115 188 075 855 872	
58		288 230 376 151 711 744	
59		576 460 752 303 423 488	
60	15	1 152 921 504 606 846 976	E (exa)
61		2 305 843 009 213 693 952	
62		4 611 686 018 427 387 904	
63		9 223 372 036 854 775 808	

<i>m</i>	<i>n</i>	2^m and 16^n	Symbol
64	16	18 446 744 073 709 551 616	
65		36 893 488 147 419 103 232	
66		73 786 976 294 838 206 464	
67		147 573 952 589 676 412 928	
68	17	295 147 905 179 352 825 856	Z (zetta)
69		590 295 810 358 705 651 712	
70		1 180 591 620 717 411 303 424	
71		2 361 183 241 434 822 606 848	
72	18	4 722 366 482 869 645 213 696	
73		9 444 732 965 739 290 427 392	
74		18 889 465 931 478 580 854 784	
75		37 778 931 862 957 161 709 568	
76	19	75 557 863 725 914 323 419 136	
77		151 115 727 451 828 646 838 272	
78		302 231 454 903 657 293 676 544	
79		604 462 909 807 314 587 353 088	
80	20	1 208 925 819 614 629 174 706 176	Y (yotta)
81		2 417 851 639 229 258 349 412 352	
82		4 835 703 278 458 516 698 824 704	
83		9 671 406 556 917 033 397 649 408	
84	21	19 342 813 113 834 066 795 298 816	
85		38 685 626 227 668 133 590 597 632	
86		77 371 252 455 336 267 181 195 264	
87		154 742 504 910 672 534 362 390 528	
88	22	309 485 009 821 345 068 724 781 056	(see note)
89		618 970 019 642 690 137 449 562 112	
90		1 237 940 039 285 380 274 899 124 224	
91		2 475 880 078 570 760 549 798 248 448	
92	23	4 951 760 157 141 521 099 596 496 896	
93		9 903 520 314 283 042 199 192 993 792	
94		19 807 040 628 566 084 398 385 987 584	
95		39 614 081 257 132 168 796 771 975 168	
96	24	79 228 162 514 264 337 593 543 950 336	
97		158 456 325 028 528 675 187 087 900 672	
98		316 912 650 057 057 350 374 175 801 344	
99		633 825 300 114 114 700 748 351 602 688	
100	25	1 267 650 600 228 229 401 496 703 205 376	(see note)
101		2 535 301 200 456 458 802 993 406 410 752	
102		5 070 602 400 912 917 605 986 812 821 504	
103		10 141 204 801 825 835 211 973 625 643 008	
104	26	20 282 409 603 651 670 423 947 251 286 016	
105		40 564 819 207 303 340 847 894 502 572 032	
106		81 129 638 414 606 681 695 789 005 144 064	
107		162 259 276 829 213 363 391 578 010 288 128	
108	27	324 518 553 658 426 726 783 156 020 576 256	(see note)
109		649 037 107 316 853 453 566 312 041 152 512	
110		1 298 074 214 633 706 907 132 624 082 305 024	
111		2 596 148 429 267 413 814 265 248 164 610 048	
112	28	5 192 296 858 534 827 628 530 496 329 220 096	
113		10 384 593 717 069 655 257 060 992 658 440 192	
114		20 769 187 434 139 310 514 121 985 316 880 384	
115		41 538 374 868 278 621 028 243 970 633 760 768	
116	29	83 076 749 736 557 242 056 487 941 267 521 536	
117		166 153 499 473 114 484 112 975 882 535 043 072	
118		332 306 998 946 228 968 225 951 765 070 086 144	
119		664 613 997 892 457 936 451 903 530 140 172 288	
120	30	1 329 227 995 784 915 872 903 807 060 280 344 576	(see note)
121		2 658 455 991 569 831 745 807 614 120 560 689 152	
122		5 316 911 983 139 663 491 615 228 241 121 378 304	
123		10 633 823 966 279 326 983 230 456 482 242 756 608	
124	31	21 267 647 932 558 653 966 460 912 964 485 513 216	
125		42 535 295 865 117 307 932 921 825 928 971 026 432	
126		85 070 591 730 234 615 865 843 651 857 942 052 864	
127		170 141 183 460 469 231 731 687 303 715 884 105 728	
128	32	340 282 366 920 938 463 463 374 607 431 768 211 456	

Note: No Système international d'unités (SI) symbols greater than Y (yotta) are defined.



File Number: S-390-00



Printed in the United States of America on recycled paper containing 10% recovered post-consumer fiber.

SA22-7871-06

