

Enterprise COBOL for z/OS



Customization Guide

Version 4 Release 1

Enterprise COBOL for z/OS



Customization Guide

Version 4 Release 1

Note!

Before using this information and the product it supports, read the information in "Notices," on page 65.

First Edition (December 2007)

This edition applies to Version 4 Release 1 of IBM Enterprise COBOL for z/OS (program number 5655-S71) and to all subsequent releases and modifications until otherwise indicated in new editions. Make sure that you are using the correct edition for the level of the product.

You can order publications online at www.ibm.com/shop/publications/order/, or order by phone or fax. IBM Software Manufacturing Solutions takes publication orders between 8:30 a.m. and 7:00 p.m. Eastern Standard Time (EST). The phone number is (800)879-2755. The fax number is (800)445-9269.

You can also order publications through your IBM representative or the IBM branch office that serves your locality.

© Copyright International Business Machines Corporation 1996, 2007. All rights reserved.

US Government Users Restricted Rights – Use, duplication or disclosure restricted by GSA ADP Schedule Contract with IBM Corp.

Contents

Figures v

Tables vii

Preface ix

About this document	ix
How to read the syntax diagrams	ix
Using the macro planning worksheets	x
How to send your comments	xi
Accessibility	xi
Summary of changes	xii
Changes to this edition	xii
Major changes to Enterprise COBOL	xii

Chapter 1. Planning to customize

Enterprise COBOL 1

Making changes after installation—why customize?	1
Planning to modify compiler option default values	1
Why make compiler options fixed?	2
Modifying compiler options and phases	3
Planning to place compiler phases in shared storage	5
Why place the compiler phases in shared storage?	5
Compiler phases and their defaults	6
Planning to create an additional reserved word table	10
Why create additional reserved word tables?	10
Controlling use of nested programs	10
Reserved word tables supplied with Enterprise COBOL	11

Chapter 2. Enterprise COBOL compiler options 13

Specifying COBOL compiler options	13
Conflicting compiler options	13
Compiler options for standards conformance	14
Compiler options syntax and descriptions	15
ADATA	15
ADEXIT	15
ADV	16
ALOWCBL	16
ARITH	17
AWO	17
BUF	18
CICS	18
CODEPAGE	19
COMPILE	19
CURRENCY	20
DATA	21
DATEPROC	22
DBCS	23
DBCSXREF	23
DECK	24
DIAGTRUNC	24
DLL	25
DYNAM	25

EXPORTALL	26
FASTSORT	26
FLAG	27
FLAGSTD	28
INEXIT	29
INTDATE	30
LANGUAGE	30
LIB	31
LIBEXIT	31
LINECNT	32
LIST	32
LITCHAR	33
LVLINFO	33
MAP	33
MDECK	34
NAME	34
NSYMBOL	35
NUM	35
NUMCLS	36
NUMPROC	36
OBJECT	37
OFFSET	37
OPTIMIZE	38
OUTDD	39
PGMNAME	39
PRTEXIT	40
RENT	40
RMODE	41
SEQ	42
SIZE	42
SOURCE	43
SPACE	43
SQL	44
SQLCCSID	44
SSRANGE	45
TERM	45
TEST	46
THREAD	47
TRUNC	48
VBREF	49
WORD	50
XMLPARSE	51
XREFOPT	51
YRWINDOW	52
ZWB	52

Chapter 3. Customizing Enterprise COBOL 55

Summary of user modifications	55
Changing the defaults for compiler options	56
Changing compiler options default module	56
Creating an options module to override options specified as fixed	57
Creating or modifying additional reserved word tables	57

Creating or modifying a reserved word table	58
Coding control statements	59
Rules for coding control statements	60
Coding operands in control statements	60
Rules for coding control statement operands	60
ABBR statement	61
INFO statement	61
RSTR statement	61
Modifying and running JCL to create a new reserved word table	62
Modifying and running non-SMP/E JCL	62
Placing Enterprise COBOL modules in shared storage	63
Tailoring the cataloged procedures to your site	63

Appendix. Notices	65
Programming interface information	67
Trademarks	67

List of resources	69
Enterprise COBOL for z/OS	69
z/OS Language Environment	69
Related publications	69
Softcopy publications	69

Index	71
------------------------	-----------

Figures

1. Syntax format for IGYCOPT compiler options and phases macro 3
2. Syntax format for reserved word processor control statements 59

Tables

1.	IGYCDOPT worksheet for options	3	6.	Effect of RMODE and RENT/NORENT on residency mode	42
2.	IGYCDOPT program worksheet for compiler phases	10	7.	Summary of user modification jobs for Enterprise COBOL	55
3.	Conflicting compiler options	13			
4.	Entries for the LANGUAGE compiler option	31			
5.	Effect of RENT and RMODE on residency mode	41			

Preface

About this document

This book is for systems programmers who are responsible for customizing Enterprise COBOL for z/OS[®] for their location. This book provides information needed to plan for and customize Enterprise COBOL under z/OS. In addition, this book can help to assess the value of Enterprise COBOL to your organization.

In this book, the generic term "operating system" is used when referring to z/OS.

You should have a knowledge of Enterprise COBOL and of your system's operating environment to use this book and ensure a successful customization of Enterprise COBOL.

How to read the syntax diagrams

Throughout this book, syntax for the compiler options is described using the structure defined below.

- Read the syntax diagrams from left to right, from top to bottom, following the path of the line. The following table shows the meaning of symbols at the beginning and end of syntax diagram lines.


Symbol	Indicates
>>-	The syntax diagram starts here
->	The syntax diagram is continued on the next line
>-	The syntax diagram is continued from the previous line
-<<	The syntax diagram ends here

Diagrams of syntactical units other than complete statements start with the >- symbol and end with the -> symbol.

- Required items appear on the horizontal line (the main path).



- Optional items appear below the main path.



- When you can choose from two or more items, they appear vertically in a stack. If you *must* choose one of the items, one item of the stack appears on the main path. The default, if any, appears above the main path and is chosen by the IGYCOPT macro if you do not specify another choice. In some cases, the default is affected by the system in which the program is being run.



If choosing one of the items is optional, the entire stack appears below the main path.



- An arrow returning to the left above the main line indicates an item that can be repeated.



A repeat arrow above a stack indicates that you can make more than one choice from the stacked items, or repeat a single choice.

- Keywords appear in uppercase letters (for example, PRINT). They must be spelled exactly as shown. Variables appear in all lowercase letters (for example, item). They represent user-supplied names or values.
- If punctuation marks, parentheses, arithmetic operators, or such symbols are shown, they must be entered as part of the syntax.
- Use at least one blank or comma to separate parameters.

Using the macro planning worksheets

The planning worksheets in this book will help you prepare to customize Enterprise COBOL. By completing them, you will be able to easily identify those options that you want to change from the IBM-supplied default values. You might also want to use the worksheets as a source from which to actually customize the IBM-supplied default values.

The headings in each worksheet might differ slightly from each other. Refer to the following list of definitions for an explanation of each specific column heading. The worksheets are “IGYCDOPT worksheet for compiler options” on page 3 and “IGYCDOPT worksheet for compiler phases” on page 10.

Option

The OPTION column identifies the options contained within a specific installation macro. This column represents the options exactly as they are in the macro.

Fixed

The FIXED column is used to identify the options that can not be overridden by an application programmer. Enter an asterisk [*] into the **Enter * for Fixed** only for those options that you want to be fixed.

Selection

The SELECTION column is for you to identify the value associated with each option. In the space provided, enter the value you want to assign to each option. Use the topic reference column to locate the specific information about the option that will assist you in selecting the appropriate value.

IBM-Supplied Default

The IBM-SUPPLIED DEFAULT column identifies the value that is supplied for the specified installation macro if the option is not altered. If the IBM-supplied default is identical to the value that you desire for installation, you need not modify that option within that specific macro.

Topic Reference

The PAGE REFERENCE column identifies the topic where you will find the syntax diagram for and more specific information about the option.

After you have completed the worksheets, identify those options that are different from the IBM-supplied defaults. These are the items that you must code in the installation macros. The worksheet entries have been positioned such that the order of the entries will remain consistent with the actual coding semantics.

How to send your comments

Your feedback is important in helping us to provide accurate, high-quality information. If you have comments about this book or any other Enterprise COBOL documentation, contact us in one of these ways:

- Fill out the Readers' Comment Form at the back of this book, and return it by mail or give it to an IBM representative. If the form has been removed, address your comments to:

IBM Corporation
DTX/E269
555 Bailey Avenue
San Jose, CA
95141-9989
USA

- Fax your comments to this U.S. number: (800)426-7773.
- Use the Online Readers' Comment Form at www.ibm.com/software/ad/rcf/.

Be sure to include the name of the book, the publication number of the book, the version of Enterprise COBOL, and, if applicable, the specific location (for example, page number) of the text that you are commenting on.

When you send information to IBM, you grant IBM a nonexclusive right to use or distribute the information in any way it believes appropriate without incurring any obligation to you.

Accessibility

Accessibility features help a user who has a physical disability, such as restricted mobility or limited vision, to use software products successfully. The accessibility features in z/OS provide accessibility for Enterprise COBOL.

The major accessibility features in z/OS enable users to:

- Use assistive technology products such as screen readers and screen magnifier software.
- Operate specific or equivalent features by using only the keyboard.
- Customize display attributes such as color, contrast, and font size.

Using assistive technologies

Assistive technology products work with the user interfaces that are found in z/OS. For specific guidance information, consult the documentation for the assistive technology product that you use to access z/OS interfaces.

Keyboard navigation of the user interface

Users can access z/OS user interfaces by using TSO/E or ISPF. For information about accessing TSO/E and ISPF interfaces, refer to the following publications:

- *z/OS TSO/E Primer*
- *z/OS TSO/E User's Guide*
- *z/OS ISPF User's Guide Volume I*

These guides describe how to use TSO/E and ISPF, including the use of keyboard shortcuts or function keys (PF keys). Each guide includes the default settings for the PF keys and explains how to modify their functions.

Accessibility of this document

The English-language XHTML format of this document that will be provided in the IBM® System z™ Enterprise Development Tools and Compilers Information Center at <http://publib.boulder.ibm.com/infocenter/pdthelp/index.jsp> is accessible to visually impaired individuals who use a screen reader.

To enable your screen reader to accurately read syntax diagrams, source code examples, and text that contains the period or comma picture symbols, you must set the screen reader to speak all punctuation.

Summary of changes

This section lists the major changes that have been made to this document and to the Enterprise COBOL for z/OS product since Enterprise COBOL Version 3. Technical changes are marked in the left margin by a vertical bar in the PDF and BookManager® versions.

Changes to this edition

This edition contains updates for the new compiler option XMLPARSE. It also contains updates for the revised compiler options TEST and MDECK.

Manual customization of the Unicode Services conversion image is no longer necessary. Therefore, information about manual processes has been removed from this document.

Major changes to Enterprise COBOL

Version 4 Release 1, December 2007

- The performance of operations on Unicode (USAGE NATIONAL) data has been significantly improved. The compiler now generates z/Architecture® hardware instructions for most Unicode MOVE operations and comparisons.
- A new compiler option, XMLPARSE, makes it possible to choose between parsing with the parser that is available with the COBOL library (for compatibility with Enterprise COBOL Version 3) or with the z/OS XML System Services parser.
- New XML PARSE capabilities are available when you parse a document with the z/OS XML System Services parser:
 - Namespaces and namespace prefixes are processed using new special registers and new XML events.
 - You can specify the document encoding using the ENCODING phrase.
 - You can parse documents that are encoded in Unicode UTF-8.
 - The RETURNING NATIONAL phrase enables you to receive XML document fragments in Unicode regardless of the original encoding of an XML document.
 - You can parse very large documents a buffer at a time.

- The XML GENERATE statement has been enhanced:
 - You can specify a namespace using the NAMESPACE phrase, and a namespace prefix to be applied to each element using the NAMESPACE-PREFIX phrase.
 - You can specify the code page of the generated document using the ENCODING phrase.
 - XML documents can now be generated in UTF-8 as well as in UTF-16 or various EBCDIC code pages.
 - The WITH ATTRIBUTES phrase causes eligible elementary items to be expressed as attributes rather than as child elements in the generated XML.
 - The WITH XML-DECLARATION phrase causes an XML declaration to be generated.
- A new compiler option, OPTFILE, enables the specifying of COBOL compiler options from within a data set.
- Compiler listings now cross-reference COPY statements and the data sets from which copybooks are obtained.
- Support for new features of DB2® for z/OS V9 is enabled when you use the integrated DB2 coprocessor (SQL compiler option):
 - New SQL data types are supported: XML types, BINARY, VARBINARY, BIGINT, and file reference variables.
 - New SQL syntax for XML manipulation, enhancements to large object manipulation, MERGE, and SELECT FROM MERGE is supported.
 - DB2 processing options STDSQL(YES|NO), NOFOR, and SQL(ALL|DB2) are supported as suboptions to the SQL compiler option.
- Several usability enhancements to COBOL-DB2 applications are available when you use the integrated DB2 coprocessor:
 - The compiler listing is enhanced to show the DB2 options in effect (if you use DB2 for z/OS V9) and to show the expansion of the SQLCA and SQLDA control blocks.
 - You can specify an alternate ddname for DBRMLIB when you invoke the compiler from an assembler language program.
 - An explicitly coded LOCAL-STORAGE SECTION or WORKING-STORAGE SECTION is no longer required.
- Debugging has been enhanced to support Debug Tool V8. A new suboption of the TEST compiler option, EJPD, enables the Debug Tool commands JUMPTO and GOTO for production debugging. The TEST compiler option has been simplified and has restructured suboptions.

Chapter 1. Planning to customize Enterprise COBOL

This chapter provides the following information for planning the customization of Enterprise COBOL:

- Making changes after installation: why customize?
- Planning to modify compiler default values
- Planning to place Enterprise COBOL in shared storage
- Planning to create an additional reserved word table

If you're installing IBM Debug Tool, you can decide whether to place its modules in the shared storage and whether you want to set up your CICS® environment to work with Debug Tool.

The information in this chapter helps you plan your customization. For the actual customization procedures, see Chapter 3, "Customizing Enterprise COBOL," on page 55.

This chapter also contains worksheets to help you plan modifications to the IBM-supplied default values within macros. See "Using the macro planning worksheets" on page x for an explanation of the planning worksheets in this manual.

Important

Confer with the application programmers at your site while you plan the customization of Enterprise COBOL. Doing so will ensure that the modifications you make serve their needs and support the applications being developed.

Making changes after installation—why customize?

When you install Enterprise COBOL, you receive IBM-supplied defaults for compiler options and phases and the reserved word table. You might want to customize Enterprise COBOL to better suit the needs of application programmers at your site.

After you install Enterprise COBOL, you can:

- Create additional reserved word tables
- Make the compiler options fixed
- Modify the default values for the compiler options
- Modify the residency values for the compiler phases

The following sections discuss the planning you must do to customize Enterprise COBOL for your site.

Planning to modify compiler option default values

Compiler option defaults and residency for compiler phases are set in the IGYCDOPT program, as shown in Table 1 on page 3 and Table 2 on page 10. The default options module, IGYCDOPT, is link-edited with AMODE (31) and RMODE (ANY) during installation.

When you assemble COBOL customization parts, such as IGYCDOPT, you need access to a system MACLIB. Typically, the MACLIB is found in SYS1.MACLIB. You also need access to the COBOL MACLIB IGY.V4R1M0.SIGYMAC.

The IGYCDOPT program has two purposes: it lets you select and fix the defaults for compiler options and specify which compiler phases are in shared storage. You can accept the IBM-supplied compiler option values that you receive when you install Enterprise COBOL, or you can modify them to better suit the needs of programmers at your location. You can also choose whether or not your application programmers will have the ability to override these options.

Note: The high-level qualifiers of IGY.V4R1M0 might have been changed when Enterprise COBOL was installed.

If you identify compiler phases that reside in shared system storage, the compiler can use the storage in the region for work areas. For a more detailed description of why you might want to modify the phase defaults, see “Why place the compiler phases in shared storage?” on page 5.

Why make compiler options fixed?

Enterprise COBOL can help you to set up your site’s unique programming standards. For example, many sites select RENT as the preferred compiler option, but have no easy way to enforce its use.

With Enterprise COBOL, you can use the IGYCDOPT program to specify that an option is fixed and cannot be changed or overridden at compile time. Then, at compile time, an attempt to override a fixed option is not allowed and results in a diagnostic message with a nonzero compiler return code.

When certain options are fixed for consistent usage, there might be special conditions that require the ability to bypass a fixed option. This change can be made by assembling a temporary copy of the IGYCDOPT program with different parameters. At compile time, if you use a JOBLIB or STEPLIB containing the required IGYCDOPT module, you can bypass the fixed option. For example, if you select the OPT (OPTIMIZE) option to be fixed—indicating that you always want the COBOL compiler to generate optimized object code—and then need to exempt an application from this requirement, you must reassemble the IGYCDOPT program after you remove the asterisk parameter from the option. You then place the resulting IGYCDOPT module in a temporary library to be accessed as a JOBLIB or STEPLIB at compile time.

Sample installation jobs

Enterprise COBOL provides two sample installation jobs that you can modify and then use to change the defaults for compiler options. One sample job provides an example of how to change the IBM-supplied defaults for compilers. The other sample job provides an example of how to override compiler options that have been fixed.

IGYWDOPT

Use this sample installation job to change the IBM-supplied defaults using SMP/E.

IGYWUOPT

Use this sample installation job to create a module outside of SMP/E in which you can specify different defaults if it becomes necessary to override compiler options that have been fixed with the IGYCDOPT program.

These jobs are located in the COBOL sample data set IGY.V4R1M0.SIGYSAMP.

Modifying compiler options and phases

If you plan to modify the values for compiler options and compiler phases, use the IGYCOPT syntax format shown in Figure 1. The IBM-supplied default values are shown both on the planning worksheets and immediately following each syntax diagram. The syntax diagrams also show the default as explained in "How to read the syntax diagrams" on page ix.

Compiler options and phases, and their defaults, are discussed in the following sections. Review these options and phases and their default values to determine the values that are most suitable for your applications.

IGYCOPT format

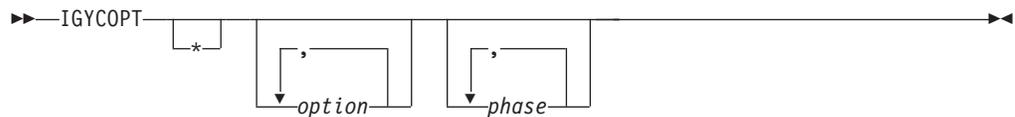


Figure 1. Syntax format for IGYCOPT compiler options and phases macro

IGYCDOPT worksheet for compiler options

The following worksheet will help you to plan and code the compiler options portion of the IGYCDOPT program. To complete the worksheet, fill in the "Enter * for fixed" and the "Enter selection" columns.

The IGYCDOPT worksheet also includes a section for compiler phases. That section of the worksheet can be found in "IGYCDOPT worksheet for compiler phases" on page 10, following the discussion on compiler phases.

Notes:

1. Coding the asterisk [*], when you modify a compiler option default value, indicates that the option is to be fixed and cannot be overridden by an application programmer.
2. The ALLOWCBL, DBCSXREF, LVLINFO, and NUMCLS options cannot be overridden at compile time. Therefore, the "Enter * for fixed" worksheet entries for these options are blank.
3. The IBM-supplied default value for ADEXIT, INEXIT, LVLINFO, LIBEXIT, and PRTEXT is null. Therefore, the "IBM-supplied default" entries for these options are blank.
4. The DUMP compiler option cannot be set through the IGYCDOPT program. Unless changed at compile time, DUMP is always set to NODUMP.
5. The OPTFILE compiler option cannot be set through the IGYCDOPT program.

Table 1. IGYCDOPT worksheet for options

Compiler option	Enter * for fixed	Enter selection	IBM-supplied default	Syntax description
ADATA=	_____	_____	<u>NO</u>	"ADATA" on page 15

Table 1. IGYCDOPT worksheet for options (continued)

Compiler option	Enter * for fixed	Enter selection	IBM-supplied default	Syntax description
ADEXIT=	_____	_____		"ADEXIT" on page 15
ADV=	_____	_____	<u>YES</u>	"ADV" on page 16
ALOWCBL=	_____	_____	<u>YES</u>	"ALOWCBL" on page 16
ARITH=	_____	_____	<u>COMPAT</u>	"ARITH" on page 17
AWO=	_____	_____	<u>NO</u>	"AWO" on page 17
BUF=	_____	_____	<u>4K</u>	"BUF" on page 18
CICS=	_____	_____	<u>NO</u>	"CICS" on page 18
CODEPAGE=	_____	_____	<u>1140</u>	"CODEPAGE" on page 19
COMPILE=	_____	_____	<u>NOC(S)</u>	"COMPILE" on page 19
CURRENCY=	_____	_____	<u>NO</u>	"CURRENCY" on page 20
DATA=	_____	_____	<u>31</u>	"DATA" on page 21
DATEPROC=	_____	_____	<u>NO</u>	"DATEPROC" on page 22
DBCS=	_____	_____	<u>Yes</u>	"DBCS" on page 23
DBCSXREF	_____	_____	<u>NO</u>	"DBCSXREF" on page 23
DECK=	_____	_____	<u>NO</u>	"DECK" on page 24
DIAGTRUNC=	_____	_____	<u>NO</u>	"DIAGTRUNC" on page 24
DLL=	_____	_____	<u>NO</u>	"DLL" on page 25
DYNAM=	_____	_____	<u>NO</u>	"DYNAM" on page 25
EXPORTALL=	_____	_____	<u>NO</u>	"EXPORTALL" on page 26
FASTSRT=	_____	_____	<u>NO</u>	"FASTSRT" on page 26
FLAG=	_____	_____	<u>(I,J)</u>	"FLAG" on page 27
FLAGSTD=	_____	_____	<u>NO</u>	"FLAGSTD" on page 28
INTDATE=	_____	_____	<u>ANSI</u>	"INTDATE" on page 30
INEXIT=	_____	_____		"INEXIT" on page 29
LANGUAGE=	_____	_____	<u>ENGLISH</u>	"LANGUAGE" on page 30
LIB=	_____	_____	<u>NO</u>	"LIB" on page 31
LIBEXIT=	_____	_____		"LIBEXIT" on page 31
LINECNT=	_____	_____	<u>60</u>	"LINECNT" on page 32
LIST=	_____	_____	<u>NO</u>	"LIST" on page 32
LITCHAR=	_____	_____	<u>QUOTE</u>	"LITCHAR" on page 33
LVLINFO=	_____	_____		"LVLINFO" on page 33
MAP=	_____	_____	<u>NO</u>	"MAP" on page 33
MDECK=	_____	_____	<u>NO</u>	"MDECK" on page 34
NAME=	_____	_____	<u>NO</u>	"NAME" on page 34
NSYMBOL=	_____	_____	<u>NATIONAL</u>	"NSYMBOL" on page 35
NUM=	_____	_____	<u>NO</u>	"NUM" on page 35
NUMCLS=	_____	_____	<u>PRIM</u>	"NUMCLS" on page 36
NUMPROC=	_____	_____	<u>NOPFD</u>	"NUMPROC" on page 36
OBJECT=	_____	_____	<u>YES</u>	"OBJECT" on page 37
OFFSET=	_____	_____	<u>NO</u>	"OFFSET" on page 37
OPT=	_____	_____	<u>NO</u>	"OPTIMIZE" on page 38
OUTDD=	_____	_____	<u>SYSOUT</u>	"OUTDD" on page 39
PGMNAME=	_____	_____	<u>COMPAT</u>	"PGMNAME" on page 39
PRTEXTIT=	_____	_____		"PRTEXTIT" on page 40
RENT=	_____	_____	<u>YES</u>	"RENT" on page 40
RMODE=	_____	_____	<u>AUTO</u>	"RMODE" on page 41
SEQ=	_____	_____	<u>YES</u>	"SEQ" on page 42
SIZE=	_____	_____	<u>MAX</u>	"SIZE" on page 42
SOURCE=	_____	_____	<u>YES</u>	"SOURCE" on page 43
SPACE=	_____	_____	<u>1</u>	"SPACE" on page 43

Table 1. IGYCDOPT worksheet for options (continued)

Compiler option	Enter * for fixed	Enter selection	IBM-supplied default	Syntax description
SQL=	___	_____	<u>NO</u>	"SQL" on page 44
SQLCCSID=	___	_____	<u>YES</u>	"SQLCCSID" on page 44
SSRANGE=	___	_____	<u>NO</u>	"SSRANGE" on page 45
TERM=	___	_____	<u>NO</u>	"TERM" on page 45
TEST=	___	_____	<u>NO</u>	"TEST" on page 46
THREAD=	___	_____	<u>NO</u>	"THREAD" on page 47
TRUNC=	___	_____	<u>STD</u>	"TRUNC" on page 48
VBREF=	___	_____	<u>NO</u>	"VBREF" on page 49
WORD=	___	_____	<u>*NO</u>	"WORD" on page 50
XMLPARSE=	___	_____	<u>XMLSS</u>	"XMLPARSE" on page 51
XREFOPT=	___	_____	<u>YES</u>	"XREFOPT" on page 51
YRWINDOW=	___	_____	<u>1900</u>	"YRWINDOW" on page 52
ZWB=	___	_____	<u>YES</u>	"ZWB" on page 52

Planning to place compiler phases in shared storage

You might want to make some load modules resident in a link-pack area in order to minimize the search for them when an Enterprise COBOL program is run or when the modules will be shared. You might also want to make some or all of the compiler phases resident. Note that the term *shared storage* is used generally to describe the link-pack area (LPA), the extended link-pack area (ELPA), or modified link-pack area (MLPA). Except where specifically stated, all three terms are referenced when *link-pack area* is used in the following sections.

Why place the compiler phases in shared storage?

All compiler modules, except the run dump modules (IGYCRDPR and IGYCRDSC) and the reserved word utility (IGY8RWTU), are eligible for placement in the shared storage of z/OS machines. All compiler phases except IGYCRCTL and IGYCSIMD have RMODE(ANY) and AMODE(31). Since IGYCRCTL and IGYCSIMD have RMODE 24, they can be placed in the LPA or MLPA, but not in the ELPA. Shared storage is an area of storage that is the same for each virtual address space. Information stored there can be shared and does not have to be loaded in the user region because it is the same space for all users. By sharing the information, more space is made available for the compiler work area.

Note: The Enterprise COBOL, COBOL for MVS™ & VM, COBOL for OS/390® & VM and VS COBOL II compilers use the same module names; thus, only one set of phases can be placed in the LPA for any given initialization of the operating system.

The IGYCDOPT program indicates where each compiler phase is loaded, either inside (IN) or outside (OUT) of the user region. By placing compiler phases in the MLPA, the compiler has more storage available for the user's program.

If you indicate that a phase will not reside in the user region, you must ensure that you actually place the phase in shared storage. This information is used by the compiler to determine how much storage to leave for the system to load compiler phases in the user region. For a description of how to place a phase in shared

storage, see *Initialization and Tuning* manual for your particular operating system, as listed under “Related publications” on page 69.

We recommend that the following four phases be placed in a shared storage area:

IGYCRCTL

because it is resident in the user region throughout compilation.

IGYCSIMD

because it is resident in the user region throughout compilation.

IGYCPGEN

because it is one of the two largest compiler phases.

IGYCSCAN

because it is the other of the two largest compiler phases.

You can select any or all compiler phases to be placed in shared storage based on frequency of concurrent use and phase size. If your facility seldom uses the compiler, there might be no advantage to installing any phases in shared storage. However, if there are frequent compilations and sufficient MLPA storage is available, making the entire compiler resident might be advantageous. If sufficient shared storage is not available, priority should be given to IGYCRCTL and IGYCSIMD, the two phases that are always resident in the user region during compilation. Also, if sufficient shared storage is not available, priority should be given to IGYCPGEN and IGYCSCAN, the largest compiler phases.

Another advantage of placing compiler phases in shared storage is that, at compile time, the initialization logic allocates in the user region a storage block of sufficient size to contain the largest phase not resident in shared storage. Minimizing the space allocation for any given user region size means more space for the compilation process (which allows larger programs to be compiled within a given user region) and possibly a more efficient compilation. The IGYCPGEN and IGYCSCAN compiler phases are approximately 250-KB larger than the next largest compiler phase. Shared storage can make a significant difference if you are compiling using the 760-KB minimum region size.

Compiler phases and their defaults

To indicate where each compiler phase is loaded in relation to the user region, specify either IN or OUT. See “Why place the compiler phases in shared storage?” on page 5, for more information about why you might or might not want to change these defaults.

IN Indicates that the compiler phase is loaded into the user region from a library available at compile time. The compiler reserves storage for the phase from the value specified in the SIZE option.

Even though IN is specified for a compiler phase, the phase still can be placed into the shared system area. However, the compiler control phase ensures that the main storage area reserved for compiler phases is large enough to contain the largest phase for which IN is specified. This option will cause some storage to be unused.

OUT Indicates that the compiler phase is not loaded into the user region from the library, and therefore must reside in a shared system area, such as the MLPA.

IGYCASM1

The Assembly 1 phase. It determines the object module storage, allocates

the permanent and temporary registers, and optimizes addressability for data and procedure references. It also creates object text for data areas.

Syntax



IGYCASM2

The Assembly 2 phase. It completes preparation of the object program and creates object text, listings, punch data sets, and tables for the debugging feature.


Syntax



IGYCDIAG

The diagnostic phase. It processes E-form text and generates compiler diagnostics for source program errors. It includes IGYCDIAG plus the following message modules: IGYCxx\$D, IGYCxx\$1, IGYCxx\$2, IGYCxx\$3, IGYCxx\$4, IGYCxx\$5, and IGYCxx\$8, where xx is EN, UE, or JA.

Syntax



IGYCDMAP

The DMAP phase. It prepares text for output requested by the MAP option.

Syntax



IGYCFGEN

The file generation phase. It generates the control blocks for the FDs and SDs defined in the program.

Syntax



IGYCINIT

The initialization phase. It does housekeeping to prepare for running of the processing phases.

Syntax

▶▶—INIT=—IN—▶▶
 └─OUT─┘

IGYCLIBR

The COPY phase. It processes library source text and does a syntax check of the COPY, BASIS, and REPLACE statements.

Syntax

▶▶—LIBR=—IN—▶▶
 └─OUT─┘

IGYCLSTR

The source listing phase. It prints the source listing with embedded cross-reference and diagnostic information.

Syntax

▶▶—LSTR=—IN—▶▶
 └─OUT─┘

IGYCMSTG

Represents the header text table and diagnostic message level tables. It includes the following modules: IGYCxx\$R, IGYCLVL0, IGYCLVL1, IGYCLVL2, IGYCLVL3, and IGYCLVL8, where xx is EN, UE, or JA.

Syntax

▶▶—MSGT=—IN—▶▶
 └─OUT─┘

IGYCOPTM

The optimizer phase. It restructures the PERFORM statements and eliminates duplicate computations.

Syntax

▶▶—OPTM=—IN—▶▶
 └─OUT─┘

IGYCOSCN

The option scanning phase. It determines the default options, processes the EXEC PARM options, and processes the PROCESS (CBL) statements.

Syntax

▶▶—OSCN=—IN—▶▶
 └─OUT─┘

IGYCPGEN

The procedure generation phase. It supplies code for all procedure source verbs.


Syntax



IGYCRCTL

The resident control phase. It establishes the size of compiler common and working storage, and performs initialization of program common storage.

Syntax



IGYCRWT

The normal reserved word table.

Syntax



IGYCSCAN

The scanning phase. It does syntax and semantic analysis of the source program and translates the source to intermediate text.


Syntax



IGYCSIMD

The system interface phase for the Enterprise COBOL compiler. This phase is called by all other compiler phases to perform system-dependent functions.

Syntax



IGYCXREF

The XREF phase. It sorts user-names and procedure-names in EBCDIC collating sequence.

Syntax



IGYCDOPT worksheet for compiler phases

The following worksheet will help you to plan and code the phases portion of the IGYCDOPT program. Circle the value that you plan to assign to each phase. For more information on the values that can be assigned to each phase, see “Compiler phases and their defaults” on page 6.

Note: All phase defaults are initially set to IN.

Table 2. IGYCDOPT program worksheet for compiler phases

Phase	Circle selection	Syntax description
ASM1=	<u>IN</u> / OUT	6
ASM2=	<u>IN</u> / OUT	7
DIAG=	<u>IN</u> / OUT	7
DMAP=	<u>IN</u> / OUT	7
FGEN=	<u>IN</u> / OUT	7
INIT=	<u>IN</u> / OUT	7
LIBR=	<u>IN</u> / OUT	8
LSTR=	<u>IN</u> / OUT	8
MSGT=	<u>IN</u> / OUT	8
OPTM=	<u>IN</u> / OUT	8
OSCN=	<u>IN</u> / OUT	8
PGEN=	<u>IN</u> / OUT	8
RCTL=	<u>IN</u> / OUT	9
RWT=	<u>IN</u> / OUT	9
SCAN=	<u>IN</u> / OUT	9
SIMD=	<u>IN</u> / OUT	9
XREF=	<u>IN</u> / OUT	9

Planning to create an additional reserved word table

When you install Enterprise COBOL, you have access to the following reserved word tables:

- IGYCRWT—The default reserved word table provided for your entire facility.
- IGYCCICS—A CICS-specific reserved word table, provided as an alternate reserved word table (See “CICS reserved word table (IGYCCICS)” on page 11).

You can create additional reserved word tables after installation. (During compilation, the value of the WORD compiler option determines which reserved word table is used.)

Why create additional reserved word tables?

You can create additional reserved word tables to do the following:

- Translate the reserved words into another language, such as French or German.
- Prevent application programmers from using a particular Enterprise COBOL instruction, such as GO TO.
- Control the usage of nested programs.
- Flag those that are not supported on CICS, such as READ and WRITE.

Controlling use of nested programs

To restrict the use of nested programs, without restricting any other COBOL language features, modify the reserved word table. Do this with the INFO and

RSTR control statements. For instructions on how to make these modifications, see “Creating or modifying a reserved word table” on page 58.

Reserved word tables supplied with Enterprise COBOL

These reserved word tables are on the installation tape:

- Default reserved word table
- CICS reserved word table

Default reserved word table (IGYCRWT)

The default reserved word table is described in an appendix of *Enterprise COBOL Language Reference*.

CICS reserved word table (IGYCCICS)

Enterprise COBOL provides an alternate reserved word table specifically for CICS application programs. It is set up so that COBOL words not supported under CICS are flagged by the compiler with an error message.

The CICS reserved word table is the same as the default reserved word table except that the following COBOL words are marked as restricted (RSTR):

CLOSE	I-O-CONTROL	<u>SD</u>
DELETE	MERGE	<u>SORT</u>
FD	OPEN	<u>START</u>
<u>FILE</u>	READ	WRITE
<u>FILE-CONTROL</u>	RERUN	
<u>INPUT-OUTPUT</u>	REWRITE	

SORT users

If you intend to use the SORT statement under CICS (Enterprise COBOL supports an interface for the SORT statement under CICS), you must modify the CICS reserved word table before using it. The words underlined above must be removed from the list of words marked as restricted, because they are required for the SORT function.

Using the table: To use the CICS reserved word table, you must specify the WORD(CICS) compiler option. To have the CICS reserved word table used as the default, you must set the default value of the WORD compiler option to WORD=CICS.

Location of the table: The data used to create the CICS reserved word table is in member IGY8CICS in IGY.V4R1M0.SIGYSAMP.

Note: The high-level qualifiers of IGY.V4R1M0 might have been changed when Enterprise COBOL was installed.

Chapter 2. Enterprise COBOL compiler options

This describes the compiler options whose default values you can change. The notes that accompany some of the descriptions provide additional information about these options, such as how they interact with other options during compilation. This information might help you to make decisions about which default values are appropriate for your installation. For more information on using the compiler options, see *Enterprise COBOL for z/OS Programming Guide*.

Important

Confer with the application programmers at your site while you plan the customization of Enterprise COBOL. Doing so will ensure that the modifications you make serve their needs and support the applications being developed.

Specifying COBOL compiler options

When you specify compiler options in the IGYCOPT macro, both the option name and its value must be specified in uppercase. If you don't specify the option name in uppercase, both the option name and its value are ignored and the default value is used instead. No error message is issued. If only the option value is not in uppercase, an error message will be issued indicating that an invalid option value has been specified.

Conflicting compiler options

If you specify certain compiler option values, a conflict with other compiler options might result. Table 3 will help you resolve possible conflicts between compiler options.

Table 3. *Conflicting compiler options*

Compiler option	Conflicts with:
CICS=YES	RENT=NO DYNAM=YES LIB=NO
DBCS=NO	NSYMBOL=NATIONAL
DBCSXREF=(other than NO)	XREFOPT=NO
DLL=NO	EXPORTALL=YES
DLL=YES	DYNAM=YES RENT=NO
DYNAM=YES	CICS=YES DLL=YES EXPORTALL=YES

Table 3. Conflicting compiler options (continued)

Compiler option	Conflicts with:
EXPORTALL=YES	DLL=NO DYNAM=YES RENT=NO
FLAGSTD=(other than NO)	WORD=xxxx
LIB=NO	CICS=YES MDECK=YES SQL=YES
LIST=YES	OFFSET=YES
MDECK=YES	LIB=NO
NSYMBOL=NATIONAL	DBCS=NO
OBJECT=NO	TEST=(other than NO)
OFFSET=YES	LIST=YES
OPT=STD or OPT=FULL	TEST=(HOOK,.....)
RENT=NO	CICS=YES DLL=YES EXPORTALL=YES THREAD=YES
SQL=YES	LIB=NO
TEST=(NOHOOK,.....)	OBJECT=NO
TEST=(HOOK,.....)	OBJECT=NO OPT=STD or OPT=FULL
THREAD=YES	RENT=NO
WORD=xxxx	FLAGSTD=(other than NO)
XREFOPT=NO	DBCSXREF=(other than NO)

Compiler options for standards conformance

For information on specifying compiler options to conform with the COBOL 85 Standard, please refer to the Enterprise COBOL for z/OS Programming Guide.

Compiler options syntax and descriptions

The syntax diagrams on the following topics describe each modifiable compiler option. The text below each diagram describes the effect of selecting a specific parameter.

Note:

1. The DUMP option is not in this list. Unless you change it at compile time, DUMP is always set to NODUMP. This option is not for general use; it is used only at the request of an IBM representative.
2. The OPTFILE option is not in this list. It can only be specified as a compiler invocation PARM option or on a PROCESS or CBL statement in the COBOL source program.
3. Coding the asterisk [*], when you modify a compiler option default value, indicates that the option is to be fixed and cannot be overridden by an application programmer.

ADATA

Syntax



Default

ADATA=NO

YES

Produces the Associated Data file with the appropriate records.

NO

Does not produce the Associated Data file.

Note:

1. The ADATA option can be specified only at invocation through the option list, on the PARM field of JCL, as a command option, or as an installation default.
2. Selection of the Japanese language option might result in DBCS characters written records in the Associated Data file.
3. Specification of NOCOMPILE(W|E|S) might stop compilation prematurely, resulting in a loss of specific Associated Data records.
4. Specification of INEXIT prohibits identification of the compilation source file for the Associated Data file.

ADEXIT

Syntax



Default

No exit is specified.

name

Identifies a module to be used with the EXIT compiler option. When the suboption for this user exit is specified, the compiler loads that module and calls it for each record that is written to the Associated Data file. For more information, see Enterprise COBOL for z/OS Programming Guide.

ADV**Syntax****Default**

ADV=YES

YES

Adds one byte to the record length for the printer control character. This option might be useful to programmers who use WRITE. . .ADVANCING in their source files. The first character of the record does *not* have to be explicitly reserved by the programmer.

NO

Does not adjust the record length for WRITE. . .ADVANCING. The compiler uses the first character of the specified record area to place the printer control character. The application programmer must ensure that the record description allows for this additional byte.

Note:

1. With ADV=YES, the record length on the physical device is one byte larger than the record description length in the source program.
2. If the record length for the output file is not defined in the source code, COBOL ensures that the DCB parameters are appropriately set.
3. If ADV=YES is specified, and the record length for the output file has been defined in the source code, the programmer *must* specify the record description length as one byte larger than the source program record description. The programmer *must* also specify the block size in correct multiples of the larger record size.
4. If the LINAGE clause is specified in a file description (FD), the compiler treats that file as if ADV=YES has been specified.

ALOWCBL**Syntax****Default**

ALOWCBL=YES

YES

Allows the use of the PROCESS (or CBL) statements in COBOL programs.

NO

Diagnoses the use of PROCESS (or CBL) statements in a program as an error.

Note:

1. ALLOWCBL cannot be overridden at compile time because it cannot be included in the PROCESS (or CBL) statement.
2. The PROCESS (or CBL) statement specifies compiler-option parameters within source programs. If your installation requirements do not allow compiler options to be specified in a source program, specify ALLOWCBL=NO.

ARITH**Syntax****Default**

ARITH=COMPAT

COMPAT

Specifies 18 digits as the maximum precision for decimal data.

EXTEND

Specifies 31 digits as the maximum precision for decimal data.

AWO**Syntax****Default**

AWO=NO

YES

Activates the APPLY-WRITE-ONLY clause for any file within the program that is physical sequential with variable block format regardless of whether or not the APPLY-WRITE-ONLY clause is specified in the program.


Performance consideration: Using AWO=YES generally results in fewer calls to Data Management Services for runtime files when handling input and output.

NO

Does not activate the APPLY-WRITE-ONLY clause for any file within the program that is physical sequential with variable block format unless the APPLY-WRITE-ONLY clause is specified in the program.

BUF

Syntax



Default

BUF=4K

integer

Specifies the amount of dynamic storage, in bytes, to be allocated to each compiler work file buffer. The minimum value is 256 bytes.

Performance consideration: Using a large buffer size usually improves the performance of the compiler.

integerK

Specifies the amount of dynamic storage to be allocated to buffers in increments of 1-K (1024) bytes.

Note:

1. BUF and SIZE values are used by the compiler to determine how much storage to use during compilation. The amount allocated to the buffers is included in the amount of main storage available to the compiler for the SIZE option.
2. BUF cannot exceed the track capacity for the device used, nor can it exceed the maximum allowed by data management services.

CICS

Syntax



Default

CICS=NO

NO

When the NO option is specified, any CICS statements that are found in the source program are diagnosed and discarded.

YES

If a COBOL source program contains CICS statements and has not been preprocessed by the CICS translator, the YES option must be specified.

Notes:

1. The CICS compiler option can contain CICS suboptions. The CICS suboptions delimiter can be quotes or apostrophes. CICS suboptions cannot be specified as a COBOL installation default.
2. You can specify the CICS compiler option in any of the compiler option sources: installation defaults, compiler invocation, or PROCESS or CBL statements.

CODEPAGE

Syntax

►► CODEPAGE= * *ccsid* ►►

Default

CODEPAGE=1140

ccsid

ccsid must be a valid coded character set identifier (CCSID) integer that identifies an EBCDIC code page.

Use CODEPAGE to specify the coded character set identifier (CCSID) for an EBCDIC code page for processing compile-time and runtime COBOL operations that are sensitive to character encoding.

The default CCSID 1140 is the equivalent of CCSID 37 (EBCDIC Latin-1, USA), but additionally includes the euro symbol.

Recommendation: To avoid unnecessary conversions and associated performance overhead on systems that use both COBOL and DB2, use the same CODEPAGE compiler option setting as in your DB2 subsystem parameters and application programming defaults (specify in DSNHDECP).

For further details about the CODEPAGE option, see the *Enterprise COBOL Programming Guide*.

COMPILE

Syntax

►► COMPILE= * NOC (S E W) YES ►►

Default

COMPILE=NOC(S)

YES

Indicates that you want full compilation, including diagnostics and object code.

NOC

Indicates that you want only a syntax check.

NOC(W)

NOC(E)

NOC(S)

Specifies an error message level: W is warning; E is error; S is severe. When an error of the level specified or of a more severe level occurs, compilation stops, and only syntax checking is done for the balance of the compilation.

Note: Specifying NOCOMPILE might affect the Associated Data file by stopping compilation prematurely, resulting in loss of specific messages.

CURRENCY

Syntax



The COBOL default currency symbol is the dollar sign (\$). The CURRENCY option allows you to define an alternate default currency symbol.

Default

CURRENCY=NO

literal

Represents the default currency symbol that you want to use in your program.

The literal must be a nonnumeric literal representing a one-byte EBCDIC character that must not be any of the following:

- Digits zero (0) through nine (9)
- Uppercase alphabetic characters: A B C D P R S V X Z
- Lowercase alphabetic characters a through z
- The space
- Special characters: * + - / , . ; () = "
- Uppercase alphabetic character G, if the COBOL program defines a DBCS item with the PICTURE symbol G. The PICTURE clause will not be valid for that DBCS item because the symbol G is considered to be a currency symbol in the PICTURE clause.
- Uppercase alphabetic character N, if the COBOL program defines a DBCS item with the PICTURE symbol N. The PICTURE clause will not be valid for that DBCS item because the symbol N is considered to be a currency symbol in the PICTURE clause.
- Uppercase alphabetic character E, if the COBOL program defines an external floating-point item. The PICTURE clause will not be valid for the external floating-point item because the symbol E is considered to be a currency symbol in the PICTURE clause.

The literal (including hex literal) syntax rules are as follows:

- The literal delimiters can be either quotes or apostrophes regardless of any option setting for literal delimiters.
- When an apostrophe (') is to be the currency sign, the embedded apostrophe must be doubled, that is, two apostrophes must be coded to represent one apostrophe within the literal. For example:

''' or ''''

- The format for a hex literal specification is as follows:

X'H1H2' or X"H1H2"

where H1H2 is a valid hexadecimal value representing a one-byte EBCDIC character conforming to the rules for the currency sign literal as described above. Alphabetic characters in the hex literal must be in uppercase.

Note: Hex values of X'20' or X'21' are not allowed.

NO

Indicates that no alternate default currency sign is provided through the CURRENCY option, and the dollar sign will be used as the default currency sign for the program if the CURRENCY option is not specified at compile time.

The value NO provides the same results for the source program as omitting the CURRENCY SIGN clause in the COBOL source program.

Note:

1. You can use the CURRENCY option as an alternative to the CURRENCY SIGN clause (which is specified in the COBOL source program) for selecting the currency symbol that you use in the PICTURE clause of your COBOL program.
2. When both the CURRENCY option and the CURRENCY SIGN clause are used in a program, the symbol that is specified in the CURRENCY SIGN clause is the currency symbol in a PICTURE clause when that symbol is used (even if the CURRENCY option is fixed {*}).

DATA

Syntax



Default

DATA=31

- 31** Causes allocation of user data areas, such as working storage and FD record areas, from unrestricted storage or in space acquired by a GETMAIN with the LOC=ANY option. Specifying this option can result in storage being acquired in virtual addresses either above or below the 16-MB line. The operating system generally satisfies the request with space in virtual addresses above the 16-MB line, if it is available.
- 24** Causes allocation of user data areas in virtual addresses below 16 megabytes in storage acquired by a GETMAIN with the LOC=BELOW option.

Specify DATA=24 for programs compiled with the RENT option that are passing data parameters to programs in 24-bit mode. This includes the following cases:

- An Enterprise COBOL program is passing items in its WORKING-STORAGE to an AMODE 24 program.
- An Enterprise COBOL program is passing, by reference, data items received from its caller to an AMODE 24 program. DATA=24 is required even when the data received is below the 16-MB line.

Otherwise, the data might not be addressable by the called program.


Note:

1. When a program is compiled with the RENT option, the DATA option controls how space for WORKING-STORAGE and parameter lists is acquired.

- The DATA option has no effect on programs compiled with the NORENT option.

DATEPROC

Syntax

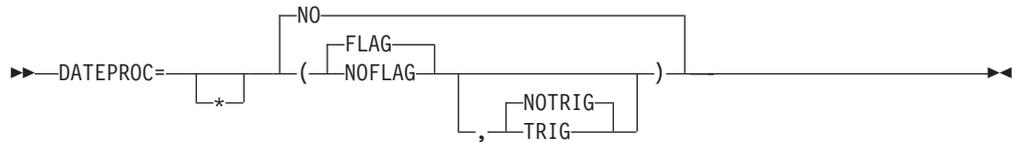

The DATEPROC option determines whether the compiler will perform date processing using the DATE FORMAT clause and other language constructs.

Default

DATEPROC=NO, or DATEPROC(FLAG,NOTRIG) if only DATEPROC is specified.

FLAG

Recognizes the DATE FORMAT clause and performs automatic date processing. In addition, specifying DATEPROC=FLAG flags, either with an information-level message or a warning-level message as appropriate, each statement that uses or is affected by date processing.

NOFLAG

Recognizes the DATE FORMAT clause and performs automatic date processing. Statements that use or are affected by date processing are not flagged with information-level or warning-level messages.

TRIG

Recognizes the DATE FORMAT clause and performs date processing based on automatic windowing that the compiler applies to operations on windowed date fields. The automatic windowed date fields are sensitive to specific trigger or limit values in the date fields and in other nondate fields. These specific values represent dates that are not valid and that can be tested for or used as upper or lower limits.

NOTRIG

Recognizes the DATE FORMAT clause and performs date processing based on automatic windowing that the compiler applies to operations on windowed date fields. The automatic windowed date fields are not sensitive to specific trigger or limit values in the date fields and in other nondate fields. Only the value of the year part of dates is relevant to automatic windowing.

NO

Treats the DATE FORMAT clause as comments and disables automatic date processing. In the case of the new intrinsic functions, specifying DATEPROC=NO generates object code that returns a default value whenever a new intrinsic function is used.

Note:

Error-level and severe-level messages are issued regardless of whether DATEPROC=FLAG or DATEPROC=NOFLAG is specified.

DBCS

Syntax



Default

DBCS=YES

YES

Recognizes X'0E' and X'0F' in a nonnumeric literal and treats them as shift-out and shift-in control characters for delimiting DBCS data.

NO


Does not recognize X'0E' and X'0F' as shift-out and shift-in control characters in a nonnumeric literal.

Note:

1. The presence of DBCS data inside the nonnumeric literal might cause the compiler to disallow certain uses of that literal. For example, DBCS characters are not allowed as program names or DDNAMES.
2. DBCS=NO conflicts with NSYMBOL(NATIONAL).

DBCSXREF

Syntax

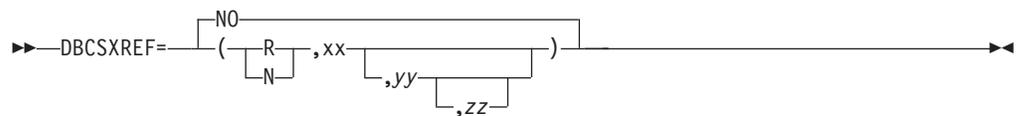

Default

DBCSXREF=NO

NO

Specifies that no ordering program is used for cross-reference of DBCS names. If the XREF phase is specified, a cross-reference listing of DBCS names is provided based on their physical order in the program.

R Specifies that the DBCS Ordering Support Program (DBCSOS) is loaded into the user region.

N Specifies that the DBCS Ordering Support Program (DBCSOS) is loaded into a shared system area such as the MLPA.

xx Names a load module of the relevant ordering program to produce DBCS cross references. It must be eight characters in length.

yy Names an ordering type. It must be two characters in length. The default ordering type defined by the specified ordering program occurs if this parameter is omitted.

zz Names the encode table that the specified ordering type uses. It must be eight characters in length. The default encode table that is associated with the particular ordering type occurs if this parameter is omitted.

Note:

1. The DBCS Ordering Support Program (DBCSOS) must be installed to specify anything other than DBCSXREF=NO.
2. If R is specified and the SIZE value is anything other than MAX, ensure that the user region is large enough to accommodate both the compiler and ordering program.
3. Specifying both XREFOPT=NO and DBCSXREF with an ordering program results in a nonzero return code while attempting to assemble the customization macro.
4. The assembly process terminates when validation diagnoses:
 - A parameter length that is not valid
 - Characters other than 'R' and 'N'
 - Missing parameters after a comma
 - Missing 'yy' when 'zz' is specified

DECK

Syntax



Default

DECK=NO

YES

Places the generated object code in a file defined by SYSPUNCH.

NO

Sends no object code to SYSPUNCH.

DIAGTRUNC

Syntax



Default

DIAGTRUNC=NO

YES

Causes the compiler to issue a severity-4 (warning) diagnostic message for MOVE statements with numeric receivers when the receiving data item has fewer integer positions than the sending data item or literal.

NO

Does not cause the compiler to produce a severity-4 message.

Note:

1. The diagnostic is also issued for moves to numeric receivers from alphanumeric data names or literal senders, except when the sending field is reference modified.

EXPORTALL

Syntax



Default

EXPORTALL=NO

YES

Automatically exports certain symbols when the object deck is link-edited to form a DLL.

Specification of EXPORTALL requires that the DLL, RENT, and NODYNAM options are also used.

NO

Does not export any symbols.

FASTSRT

Syntax



Default

FASTSRT=NO

YES

Specifies that the IBM DFSORT™ licensed program or comparable product performs input and output when you use either the USING or GIVING option.

Performance consideration: Using FASTSRT=YES eliminates the overhead, in terms of CPU time usage, of returning to Enterprise COBOL after each record is processed. However, there are restrictions that you must follow if you choose to use this option. (For a detailed description of the restrictions, see *Enterprise COBOL for z/OS Programming Guide*.)

NO

Specifies that Enterprise COBOL does the input and output for the sort and merge.


Note:

1. If FASTSRT is in effect at compile time, the compiler verifies that the FASTSRT interface can be used for all restrictions except these two:
 - A device other than a direct-access device must be used for sort work files.
 - The DCB parameter of the DD statement for the input file or output file must match the file description (FD) of the file.

2. If FASTSORT cannot be used, the compiler generates a diagnostic message and prevents the sort program from performing I/O when using either the USING or GIVING options. Therefore, it might be to your advantage to specify YES as the default.

FLAG

Syntax

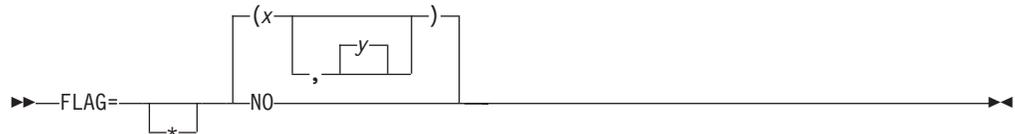

Default

FLAG=(I,I)

Note: The second severity level used in this syntax must be equal to or higher than the first.

x I|W|E|S|U

Specifies that errors at or above the severity level specified are flagged and written at the end of the source listing.

ID	Type	Return Code
I	Information	0
W	Warning	4
E	Error	8
S	Severe error	12
U	Unrecoverable error	16

y I|W|E|S|U

The optional second severity level specifies the level of syntax messages embedded in the source listing in addition to being at the end of the listing.

NO


Indicates that no error messages are flagged.

Note:

1. If the messages are to be embedded, SOURCE must be specified at compile time. Embedded messages enhance productivity because they are placed after the referenced source statement.
2. Specification of FLAG(W|E|S) might result in the loss of entire classes of messages from the Events records in the Associated Date file. See *Enterprise COBOL for z/OS Programming Guide* for more information.

FLAGSTD

Syntax



Default

FLAGSTD=NO

- x Can be M, I, or H to specify flagging for a FIPS COBOL subset or standard.
 - M** = ANS minimum subset of Standard COBOL.
 - I** = ANS intermediate subset, composed of those additional intermediate subset language elements that are not part of the ANS minimum subset.
 - H** = ANS high subset, composed of those additional high subset language elements that are not part of the ANS intermediate subset.
- y Can be any one or two combinations of D, N, or S to further define the level of flagging produced.
 - D** Specifies ANS Debug module Level 1
 - N** Specifies ANS Segmentation Module Level 1
 - S** Specifies ANS Segmentation Module Level 2 (S is a superset of N.)
- O** Specifies that obsolete elements occurring in any of the sets above are flagged
- NO** Specifies that no FIPS flagging is accomplished.

Note:

1. The following elements are flagged as nonconforming nonstandard IBM extensions to the COBOL 85 Standard:
 - Language syntax, such as the DATE FORMAT clause, used by the COBOL automatic date-processing facilities (as enabled by the DATEPROC compiler option)
 - Language syntax for object orientation and improved interoperability with C/C++
 - Use of the PGMNAME=LONGMIXED compiler option
2. When FIPS flagging is specified, informational messages in the source program listing identify:
 - Whether the language element is obsolete, nonconforming standard, or nonconforming nonstandard (language elements that are both obsolete and nonconforming are flagged as obsolete only)
 - The clause, statement, or header containing the nonconforming or obsolete syntax
 - The source program line and an indication of the starting column within that line
 - The level or optional module to which the language element belongs
3. FIPS flagging is suppressed when any error diagnosed as level E or higher occurs.

4. Interaction of FLAGSTD and other compiler options:

- If the following compiler options are explicitly or implicitly specified in a program, FLAGSTD=(other than NO) issues a warning message during compile time:

ADV=NO	LITCHAR=APOST
DATEPROC=(other than NO)	NUM=YES
DBCS=YES	NUMPROC=PFD
DYNAM=NO	SEQ=YES
FASTSRT=YES	TRUNC=OPT or BIN
LIB=NO	WORD=(other than NO or RWT)
	ZWB=NO

- Specifying the following options together with FLAGSTD=(other than NO), while attempting to assemble the customization macro, results in a nonzero return code.

ADV=NO	LITCHAR=APOST
DATEPROC=(other than NO)	NUM=YES
DBCS=YES	NUMPROC=PFD
DYNAM=NO	SEQ=YES
LIB=NO	TRUNC=OPT or BIN
	WORD=(other than NO or RWT)
	ZWB=NO

5. FLAGSTD might produce events records in the Associated Data file for FIPS standard conformation messages. Error messages are not guaranteed to be sequential in regard to source record numbers.

INEXIT

Syntax

►► INEXIT= * name ◀◀

Default

No exit is specified.

name

Identifies a module to be used with the EXIT compiler option. When the suboption for this user exit is specified, the compiler loads that module and calls it to obtain source statements instead of reading the SYSIN data set. When the option is supplied, the SYSIN data set is not opened. For more specific information, see *Enterprise COBOL for z/OS Programming Guide*.

Note:

Specification of INEXIT prohibits identification of the compilation source file.

INTDATE

Syntax

▶▶—INTDATE=—

Default

INTDATE=ANSI

ANSI

Uses the ANSI COBOL Standard starting date for integer date format dates used with date intrinsic functions. Day 1 = Jan 1, 1601.

With INTDATE(ANSI), the date intrinsic functions return the same results as in COBOL/370™ Release 1.

LILIAN

Uses the Language Environment® Lilian starting date for integer date format dates used with date intrinsic functions. Day 1 = Oct 15, 1582.

With INTDATE(LILIAN), the date intrinsic functions return results compatible with the Language Environment date callable services. These results are different from those in COBOL/370 Release 1.

Note:

1. When INTDATE(LILIAN) is in effect, CEECBLDY is not usable because you have no way to turn an ANSI integer into a meaningful date using either intrinsic functions or callable services. If you code a CALL literal statement with CEECBLDY as the target of the call with INTDATE(LILIAN) in effect, the compiler diagnoses this and converts the call target to CEEDAYS.
2. If you set your installation option to INTDATE(LILIAN), you should recompile all of your COBOL/370 Release 1 programs that use intrinsic functions to ensure that all of your code uses the lilian integer date standard. This method is the safest, because you can store integer dates, pass them between programs, and even pass them from PL/I to COBOL to C programs and have no problems.

LANGUAGE

Syntax

▶▶—LANGUAGE=—

Default

LANGUAGE=EN

XX

Specifies the language for compiler output messages. Entries for this parameter might be selected from the following list.

Table 4. Entries for the LANGUAGE compiler option

Entry	Language
EN or ENGLISH	Mixed case U.S. English
JA, JP, or JAPANESE	Japanese
UE or UENGLISH	Uppercase U.S. English

Note:

1. The LANGUAGE option name must consist of at least the first two identifying characters. Other characters following the first two identifiers can be used; however, only the first two are used to determine the language name.
2. This compiler option does not affect the language in which runtime messages are displayed. For more information on runtime options and messages, refer to *z/OS Language Environment Programming Guide*.
3. Some printers use only uppercase and might not accept output in mixed case (LANGUAGE=ENGLISH).
4. To specify the Japanese language option, the Japanese National Language Feature must be installed.
5. To specify the English language option (mixed-case English), the U.S. English Language Feature must be installed.
6. If your installation provides a language other than those listed above, and you select it as your installation's default, you must specify at least the first two characters of the language name. These two characters must be alphanumeric.
7. The selection of Japanese, together with specification of the EVENTS option or the ADATA option, might result in DBCS characters being written to error identification records in the Associated Data file.

LIB

Syntax



Default

LIB=NO

YES

Indicates that the source program contains COPY or BASIS statements.

NO

Indicates that the source program doesn't contain COPY or BASIS statements.

LIBEXIT

Syntax



Default

No exit is specified.

name

Identifies a module used with the EXIT compiler option. When the suboption for this user exit is specified, the compiler loads that module and calls it to obtain COPY statements instead of reading the SYSLIB or library-name data set. When the option is supplied, the SYSLIB and library-name data sets are not opened. For more specific information, see *Enterprise COBOL for z/OS Programming Guide*.

LINECNT

Syntax**Default**

LINECNT=60

integer

Specifies the number of lines to be printed on each page of the compiler source code listing. Three of the lines are used to generate headings. For example, if you specify LINECNT=60, 57 lines of source code are printed on each page of the output listing, and 3 lines are used for headings.

Note: The LINECNT installation option is equivalent to the LINECOUNT compile-time option.

LIST

Syntax**Default**

LIST=NO

YES

Produces a listing that includes:

- The assembler-language expansion of source code
- Information about working storage
- Global tables
- Literal pools

NO

Suppresses this listing.

Note: The LIST and OFFSET compiler options are mutually exclusive. Setting OFFSET=YES and LIST=YES results in a nonzero return code and an error message during assembly of the customization macro.

LITCHAR

Syntax

►► LITCHAR= [*] [QUOTE] [APOST]

Default

LITCHAR=QUOTE

QUOTE

Use QUOTE if you want the figurative constant [ALL] QUOTE or [ALL] QUOTES to represent one or more quotation mark (") characters. QUOTE conforms to the COBOL 85 Standard.

APOST

Use APOST if you want the figurative constant [ALL] QUOTE or [ALL] QUOTES to represent one or more apostrophe (') characters.

Notes:

1. Either quotes or apostrophes can be used as literal delimiters, regardless of whether the APOST or QUOTE option is in effect.
2. The delimiter character used as the opening delimiter for a literal must be used as the closing delimiter for that literal.

LVLINFO

Syntax

►► LVLINFO= [xxxx]

Default

No characters are specified.

xxxx

Identifies the one to four alphanumeric characters that are inserted into the listing header following the release number (the last 4 bytes of the signature area). This option might be used to identify "compiler level" information within the listing header.

MAP

Syntax

►► MAP= [*] [NO] [YES]

Default

MAP=NO

YES

Maps items declared in the DATA DIVISION. Map output includes:

- DATA DIVISION map
- Global tables
- Literal pools
- Program statistics
- Size of the program's working storage and its location in the object code if the program is compiled without the RENT compiler option

NO

Mapping is not performed.

MDECK

Syntax



Default

MDECK=NO

COMPILE

Compilation continues normally after library processing and generation of the MDECK output file.

NOCOMPILE

Compilation ends after library processing is completed and the expanded source program file is written.

NO

An MDECK output file is not produced.

NAME

Syntax



Default

NAME=NO

NOALIAS

Appends a linkage editor NAME statement (NAME *modname*(R)) to each object module created in a batch compilation. The module name (*modname*) is derived from the PROGRAM-ID statement according to the rules for forming external module names.

ALIAS

Precedes the NAME statement corresponding to the PROGRAM-ID with a linkage editor ALIAS statement for each ENTRY statement in the program.

NO

Does not append linkage editor NAME statements.

Note:

1. The NAME option allows you to create multiple modules in a program library with a single batch compilation. This can be useful for dynamic calls.

NSYMBOL

Syntax



Default

NSYMBOL=NATIONAL

DBCS

Use DBCS when data items are defined with the PICTURE clause consisting only of the PICTURE symbol N and without the USAGE clause. Such data items are treated as if the USAGE DISPLAY-1 clause were specified. Literals of the form N". . ." or N'. . .' are treated as DBCS literals.

NATIONAL

Use NATIONAL when data items are defined with the PICTURE clause consisting only of the PICTURE symbol N and without the USAGE clause. Such data items are treated as if the USAGE NATIONAL clause were specified. Literals of the form N". . ." or N'. . .' are treated as national literals.

Notes:

1. The NSYMBOL(DBCS) option is compatible with previous releases of IBM COBOL. The NSYMBOL(NATIONAL) option handles the N symbol consistently with the 200x COBOL standard.
2. NSYMBOL(NATIONAL) forces the DBCS option.

NUM

Syntax



Default

NUM=NO

YES

Uses the line numbers from the source program rather than compiler-generated line numbers for error messages and procedure maps.

NO

Uses the compiler-generated line numbers for error messages and procedure maps.

Note:

1. If COBOL programmers use COPY statements and NUM=YES is in effect, they must ensure that the source program line numbers and the COPY member line numbers are coordinated.

NUMCLS

Syntax

►►—NUMCLS=—

PRIM
ALT

—►►

Default

NUMCLS=PRIM

ALT

Specifies the sign representations that are recognized as valid by the numeric class test for data items that are defined:

- As signed (with an “S” in the PICTURE clause)
- Using DISPLAY or COMPUTATIONAL-3 (packed-decimal)
- Without the SEPARATE phrase on any SIGN clause

Processing with ALT accepts hexadecimal A through F as valid.

PRIM

Processing with PRIM accepts hexadecimal C, D, and F as valid.

Notes:

1. The numeric class test is affected by how both the NUMPROC and the NUMCLS options are specified.
2. The NUMCLS option is effective only for NUMPROC=MIG or NUMPROC=NOPFD. NUMPROC=PFD specifies more strict rules for valid sign configuration.

NUMPROC

Syntax

►►—NUMPROC=—

*

NOPFD
MIG
PFD

—►►

Default

NUMPROC=NOPFD

MIG

Aids in migrating OS/VS COBOL application programs to Enterprise COBOL. Processing with MIG entails these actions:

- Using existing signs for comparison and arithmetic operations
- Generating preferred signs for the results of MOVE and arithmetic operations (These results meet the criteria for using NUMPROC=PFD.)
- Performing numeric rather than logical comparisons

NOPFD

Repairs signs on input. After repair is performed, the signs meet the criteria for NUMPROC=PFD.

PFD

Optimizes the generated code, especially when OPT=STD or OPT=FULL. No explicit sign repair is performed. Note that NUMPROC=PFD has stringent criteria to produce correct results. To use NUMPROC=PFD:

- The sign position of unsigned numeric items must be X'F'.
- The sign position of signed numeric items must be either X'C' if positive or zero, or must be X'D' if negative.
- The sign position of separately signed numeric items must be either '+' if positive or zero, or '-' if otherwise.

Elementary MOVE and arithmetic statements in Enterprise COBOL always generate results with these preferred signs; however, group MOVES and redefinitions might produce nonconforming results. The numeric class test can be used for verification. With NUMPROC=PFDF, a numeric item fails the numeric class test if the signs do not meet the preferred sign criteria.

Performance consideration: Using NUMPROC=PFDF generates significantly more efficient code for numeric comparisons. For most references to COMP-3 and DISPLAY numeric data items, using NUMPROC=MIG and NUMPROC=NOPDF generates extra code because of sign "fix-up" processing. This extra code might also inhibit some other types of optimizations. Before setting this option, consult with your application programmers to determine the effect on the application program's output.

Note:

1. Both the NUMPROC and NUMCLS options affect the numeric class test. With NUMPROC=MIG or NUMPROC=NOPDF, the results of the numeric class test are controlled by how NUMCLS is set. When NUMPROC=PFDF, a data item must meet the preferred sign criteria to be considered numeric.

OBJECT

Syntax



Default

OBJECT=YES

YES

Places the generated object code in a file defined by SYSLIN.

NO

Places no object code in SYSLIN.

Note: The OBJECT=NO option conflicts with all values for TEST other than NO.

OFFSET

Syntax



Default

OFFSET=NO

YES

Produces a condensed PROCEDURE DIVISION listing. The procedure portion of the listing will contain line numbers, verb references, and the location of the first instruction generated for each verb. In addition, the following are produced:

- Global tables
- Literal pools
- Program statistics
- Size of the program's working storage, and its location in the object code if the program is compiled with the NORENT compiler option

NO

Does not condense the listing or produce the items listed above.

Note: The LIST and OFFSET compiler options are mutually exclusive. Setting OFFSET=YES and LIST=YES results in a nonzero return code when attempting to assemble the customization macro. See "Conflicting compiler options" on page 13 for more information on conflict resolution.

OPTIMIZE

Syntax**Default**

OPT=NO

NO

Specifies that your code is not optimized.

STD

Generates optimized object code.

Performance consideration: Using OPT=STD or OPT=FULL generally results in more efficient runtime code.

FULL

Discards any unused data items and does not generate code for any VALUE clauses for these data items. If the OPT(FULL) and MAP option are both specified, discarded data items will have a BL number of XXXX in the MAP output indicating that the number is not used.

Note:

1. The OPTIMIZE compiler option is now fully supported for programs containing object-oriented syntax for Java interoperability.
2. If you want to debug optimized object code using Debug Tool, the only hook-location subparameter allowed for the TEST option is NONE. Any other combination results in a nonzero return code and an error message during installation.
3. Optimization is turned off if an S-level error or higher occurs.

OUTDD

Syntax



Default

OUTDD=SYSOUT

ddname

Specifies the ddname of the file used for runtime DISPLAY output.

Note:

1. See *Language Environment Programming Reference* description of the MSGFILE runtime option to see how OUTDD interacts with MSGFILE.
2. Change the default for this option if, at run time, you expect to have a conflict with another product that requires SYSOUT as a ddname.

PGMNAME

Syntax



Default

PGMNAME=COMPAT

LONGMIXED

Program names are processed as is, without truncation, translation, or folding to uppercase.

LONGUPPER

Program names are folded to uppercase by the compiler but otherwise are processed as is, without truncation or translation.

COMPAT

Program names are processed in a manner compatible with COBOL/370 Release 1, and VS COBOL II.

Note:

1. The PGMNAME option controls the handling of names used in the following contexts:
 - Program names defined in the PROGRAM-ID paragraph
 - Program entry point names on the ENTRY statement
 - Program name references in calls to nested programs and static calls to separately compiled programs
 - Program name references in the static SET procedure-pointer TO ENTRY literal statement
 - Program name references in CANCEL of a nested program
2. Class and method names are not affected by the PGMNAME option.

3. For more specific information, see *Enterprise COBOL for z/OS Programming Guide*.

PRTEXT

Syntax

►► PRTEXT= * name ◀◀

Default

No exit is specified.

name

Identifies a module to be used with the EXIT compiler option. When the suboption for this user exit is specified, the compiler loads that module and calls it instead of writing to the SYSPRINT data set. When the option is supplied, the SYSPRINT data set is not opened. For more specific information, see the *Enterprise COBOL for z/OS Programming Guide*.

RENT

Syntax

►► RENT= * YES NO ◀◀

Default

RENT=YES

YES

Indicates that the object code produced for a COBOL program is reentrant. Using RENT=YES enables the program to be placed in shared storage for running above the 16-MB line. However, this option causes the compiler to generate additional code to ensure that the application program is reentrant.

NO

Indicates that the object code produced for a COBOL program is to be nonreentrant.

Note:

1. Programs must be compiled with RENT=YES or RMODE(ANY), if they will be run in virtual storage addresses above 16-MB.
2. The RENT compiler option is required for programs that are run on CICS.
3. Programs compiled with Enterprise COBOL always have AMODE(ANY). The RMODE assigned to a program depends on the RENT/NORENT and RMODE compiler options. Valid combinations include:

Table 5. Effect of RENT and RMODE on residency mode

RENT/NORENT setting	RMODE setting	Residency mode assigned
RENT	AUTO	RMODE ANY
RENT	ANY	RMODE ANY
RENT	24	RMODE 24
NORENT	AUTO	RMODE 24
NORENT	ANY	RMODE ANY
NORENT	24	RMODE 24

- When the THREAD compiler option is specified, the RENT compiler option must also be specified. If THREAD and NORENT are specified at the same level of precedence, the RENT option is forced on.

RMODE

Syntax



Default

RMODE=AUTO

AUTO

Specifies that a program will have RMODE 24 if NORENT is specified, and RMODE ANY if RENT is specified.

- 24** Specifies that a program will have RMODE 24 whether NORENT or RENT is specified.

ANY

Specifies that a program will have RMODE ANY whether NORENT or RENT is specified.

Note:

- Enterprise COBOL NORENT programs that pass data to programs running in AMODE 24 must be either compiled with the RMODE (24) option or link-edited with RMODE 24. The data areas for NORENT programs will be above the 16-MB line or below the 16-MB line depending on the RMODE of the program, even if DATA(24) has been specified. DATA(24) applies to programs compiled with the RENT option only.
- Programs compiled with Enterprise COBOL always have AMODE ANY. The RMODE assigned to a program depends on the RMODE and RENT/NORENT compiler options. Valid combinations include:

Table 6. Effect of RMODE and RENT/NORENT on residency mode

RMODE setting	RENT/NORENT setting	Residency mode assigned
AUTO	RENT	RMODE ANY
AUTO	NORENT	RMODE 24
ANY	RENT	RMODE ANY
ANY	NORENT	RMODE ANY
24	RENT	RMODE 24
24	NORENT	RMODE 24

SEQ

Syntax



Default

SEQ=YES

YES

Checks that the source statements are in ascending alphanumeric order by line number.

NO

Does not perform sequence checking.

Note:

1. If both SEQ and NUM are in effect at compile time, the sequence is checked according to numeric, rather than alphanumeric, collating sequence.

SIZE

Syntax



Default

SIZE=MAX

integer

Specifies the amount of virtual storage available, in bytes. The minimum acceptable value is 851968.

integerK

Specifies the amount of virtual storage available in 1024-byte (K) increments. The minimum acceptable value is 832K.

MAX

Requests all available space in the user region for use during the compilation. For extended architecture, the compiler obtains the largest contiguous block of free storage above the 16-MB line.

Note: Do not use SIZE(MAX) if you require that the compiler leave a specific amount of unused storage available in the user region. For example, if you are using the CICS or SQL compiler option, use a value such as SIZE(4000K). (This value should work for most programs.) If you compile in 31-bit mode and specify SIZE(MAX), the compiler uses storage as follows:

- Above the 16-MB line: all the storage in the user region
- Below the 16-MB line: storage for:
 - Work-file buffers
 - Compiler modules that must be loaded below the line

SOURCE

Syntax



Default

SOURCE=YES

YES

Indicates that you want a listing of the source statements in the compiler-generated output. This listing also includes any statements embedded by COPY.

NO

Source statements do not appear in the output.

Note: The SOURCE compiler option must be in effect at compile time if you want embedded messages in the source listing.

SPACE

Syntax



Default

SPACE=1

- 1 Provides single spacing for the source statement listing.
- 2 Provides double spacing for the source statement listing.
- 3 Provides triple spacing for the source statement listing.

SQL

Syntax



Default

SQL=NO

NO

Specify to have any SQL statements found in the source program diagnosed and discarded.

Use SQL=NO if your COBOL source programs do not contain SQL statements, or if the separate SQL preprocessor will be used to process SQL statements before invocation of the COBOL compiler.

YES

Use to enable the DB2 coprocessor capability and to specify DB2 suboptions. You must specify the SQL option if your COBOL source program contains SQL statements and it has not been processed by the DB2 precompiler.

Note:

1. You can specify the SQL option in any of the compiler option sources: compiler invocation, PROCESS/CBL statements, or installation defaults.
2. Use either quotes or apostrophes to delimit the string of DB2 suboptions.
3. DB2 suboptions cannot be specified as part of customizing the SQL option. (DB2 suboptions are supported only when the SQL compiler option is specified as an invocation option or on a CBL or PROCESS card.) However, default DB2 options can be specified when you customize the DB2 product installation defaults.
4. The SQL=YES option conflicts with the LIB=NO option.

SQLCCSID

Syntax



Default

SQLCCSID=YES

YES

Indicates that the CODEPAGE compiler option setting will influence the processing of SQL statements within the source program when the integrated DB2 coprocessor (SQL compiler option) is used.

NO

Indicates that the CODEPAGE compiler option setting will not influence the processing of SQL statements within the source program when the integrated DB2 coprocessor is used. Only COBOL statements will be sensitive to the CCSID specified in the CODEPAGE option.

Note:

1. The SQLCCSID option has an effect only when you use the integrated DB2 coprocessor (SQL compiler option).
2. The NOSQLCCSID option is recommended for applications that require the highest compatibility with the behavior of the DB2 precompiler.
3. For details on the SQLCCSID option, see the *Enterprise COBOL for z/OS Programming Guide*.

SSRANGE

Syntax



Default

SSRANGE=NO

YES

Generates code that checks subscripts, reference modifications, variable-length group ranges, and indexes in the source program at run time to ensure that they do not refer to storage outside the area assigned. It also verifies that a table with ALL subscripting, specified as a function argument, contains at least one occurrence in the table.

The generated code also checks that a variable-length item does not exceed its defined maximum length as a result of incorrect setting of the OCCURS DEPENDING ON object.

Performance consideration: If SSRANGE=YES at compile time, object code size is increased and there will be an increase in runtime overhead to accomplish the range checking.

NO

No code is generated to perform subscript or index checking at run time.

Notes:

1. If the SSRANGE option is in effect at compile time, the range-checking code is generated.
2. Range-checking can be inhibited at run time by specifying the Language Environment runtime option CHECK(OFF). However, the range-checking code still requires overhead and is dormant within the object code.
3. The range-checking code can be used optionally to aid in resolving any unexpected errors without recompilation.

TERM

Syntax



Default

TERM=NO

YES


Specifies that the progress and diagnostic messages are sent to the SYSTERM file, which defaults to the user's terminal unless specified otherwise.

NO

Specifies that no messages are sent to the SYSTERM file.

Note: If TERM is specified in the source program, a SYSTERM DD statement must also be specified for each application program.

TEST

Syntax**Default**

TEST=NO

NO Produces object code that cannot be symbolically debugged using Debug Tool.

Other than NO

Produces object code that can be run using Debug Tool. You must specify values for the *hook*, *inclusion*, and *ejpd* suboptions as described below.

hook values:

HOOK

Activates the generation of all compiled-in hooks. Hooks are generated at all statements, all path points, and all program entry and exit points. In addition, if either the DATEPROC=FLAG option or DATEPROC=NOFLAG option is in effect, hooks are generated for all date-processing statements.

NOHOOK

Suppresses the generation of all compiled-in hooks.

inclusion values:

SEPARATE

Generate the debugging information tables in a data set separate from your object program.

NOSEPARATE

Include the debugging information tables in your object program.

ejpd values:

EJPD When the OPT=STD or OPT=FULL option is specified, together with TEST=(NOHOOK,...,EJPD):

- The Debug Tool commands GOTO and JUMPTO are enabled.
- Program optimization will be reduced. Optimization will be done within statements; most optimizations will not cross statement boundaries.

NOEJPD

When TEST(NOHOOK,...,NOEJPD) and OPTIMIZE are specified:

- The JUMPTO and GOTO commands are not enabled.
- The normal amount of program optimization is done.

Note:

1. Because TEST=(HOOK,...,...) generates additional code, it can cause significant performance degradation at run time when used in a production environment.
2. If you specify TEST=(HOOK,...,...), the following options are put into effect at compilation time:
 - OBJ=YES
 - OPT=NO
3. A date-processing statement is any statement that references a date field, or any EVALUATE or SEARCH statement WHEN phrase that references a date field.
4. For production programs, compile your programs with TEST=(NOHOOK,SEPARATE,...) to get debugging capability but not increase the size of your production load modules.

THREAD

Syntax



Default

THREAD=NO

NO

Use NO if you want to indicate that a COBOL program is not enabled for execution in a Language Environment enclave with multiple POSIX threads or PL/I tasks.

YES

Use THREAD if you want to indicate that a COBOL program is enabled for execution in a Language Environment enclave with multiple POSIX threads or PL/I tasks.

Notes:

1. When the THREAD compiler option is specified, the program is enabled for use in a threaded application. However, it can still be used in nonthreaded applications. For example, you can run a program that was compiled with the THREAD option in the CICS environment, if the application does not contain multiple POSIX threads or PL/I tasks at run time.
2. When the THREAD compiler option is specified, runtime performance might be degraded because of the serialization logic that is automatically generated.

3. When the THREAD compiler option is specified, the RENT compiler option must also be specified. If THREAD and NORENT are specified at the same level of precedence, the RENT option is forced on.
4. For COBOL programs to run in a threaded application, all COBOL programs in the run unit must be compiled with the THREAD compiler option specified.
5. When the THREAD compiler option is specified, the following language elements are not supported. If any of the following language elements are specified, they are diagnosed as errors:
 - Nested programs
 - INITIAL phrase in the PROGRAM-ID clause
 - ALTER statement
 - DEBUG-ITEM special register
 - GO TO statement without a procedure name
 - RERUN
 - STOP literal statement
 - Segmentation module
 - USE FOR DEBUGGING statement
 - WITH DEBUGGING MODE clause
 - SORT or MERGE statements
6. When you compile programs with the THREAD compiler option, the following special registers are allocated upon each invocation:
 - ADDRESS-OF
 - RETURN-CODE
 - SORT-CONTROL
 - SORT-CORE-SIZE
 - SORT-FILE-SIZE
 - SORT-MESSAGE
 - SORT-MODE-SIZE
 - SORT-RETURN
 - TALLY
 - XML-CODE
 - XML-EVENT

TRUNC

Syntax



Default

TRUNC=STD

STD

Conforms to the COBOL 85 Standard.

Controls the way arithmetic fields are truncated during MOVE and arithmetic operations. The TRUNC option applies only to binary (COMP) receiving fields

in MOVE statements and in arithmetic expressions. When TRUNC=STD is in effect, the final intermediate result of an arithmetic expression, or of the sending field in the MOVE statement, truncates to the number of digits in the PICTURE clause of the binary receiving field.

OPT

The compiler assumes that the data conforms to PICTURE and USAGE specifications. The compiler manipulates the result based on the size of the field in storage (halfword or fullword).

TRUNC=OPT is recommended, but it should be specified only when data being moved into binary areas does not have a value with larger precision than that defined by the binary item PICTURE clause. Otherwise, truncation of high-order digits might occur. The truncation results are dependent on the particular code sequence generated and might not be the same in OS/VS COBOL and Enterprise COBOL.

BIN

Should not be used as an installation default. Specifies that:

1. Output binary fields are truncated only at the S/390® halfword, fullword, and doubleword boundaries, rather than at COBOL base 10 picture limits.
2. Input binary fields are treated as S/390 halfword, fullword, and doubleword, and no assumption is made that the values are limited to those implied by the base 10 PICTURE clause.
3. DISPLAY converts and outputs the full content of binary fields with no truncation to the PICTURE description.

Performance consideration: Using TRUNC=OPT does not generate extra code and generally improves performance. However, both TRUNC=BIN and TRUNC=STD generate extra code whenever a BINARY data item is changed. TRUNC=BIN is usually the slower of these options.

Note:

1. Setting this option affects program runtime logic; that is, the same COBOL source program can give different results, depending on the option setting. Verify whether your COBOL source programs assume a particular setting for correct running.
2. TRUNC=BIN is the recommended option when interfacing with other products that have S/390-format binary data (such as CICS, DB2, FORTRAN, and PL/I). This is especially true if there is a possibility of having more than 9 digits in a fullword or more than 4 digits in a halfword.

VBREF

Syntax

►► VBREF= [*] [NO | YES] ►►

Default

VBREF=NO

YES

Produces a cross-reference of all verb types in a source program to the line

numbers where they are found. VBREF=YES also produces a summary of how many times each verb was used in the program.

NO

Does not produce a cross-reference or verb-summary listing.

WORD

Syntax



Default

WORD=*NO

NO

Indicates that no alternative reserved word table is to be used as the default.

xxxx

Specifies an alternative default reserved word table to be used during compilation. **xxxx** represents the ending characters (can be 1 to 4 characters in length) of the name of the reserved word table used. The first 4 characters are IGYC. The last 4 characters cannot be any one of the character strings listed below, nor can any of them contain the dollar sign character (\$).

ASM1	LIBO	LVL8	RDSC
ASM2	LIBR	OPTM	RWT
DIAG	LSTR	OSCN	SAW
DMAP	LVL0	PGEN	SCAN
DOPT	LVL1	RCTL	SIMD
FGEN	LVL2	RDPR	XREF
INIT	LVL3		

CICS

A CICS-specific word table, IGYCCICS, is provided as an alternate reserved word table. For a description, see “CICS reserved word table (IGYCCICS)” on page 11.

Note:

1. The default for the WORD option is specified with an asterisk. When the option is installed with the default (WORD=*NO), the application programmer cannot override the option at compile time to specify an alternative reserved word table.
2. Specification of WORD affects the interpretation of input reserved words. System names (such as UPSI and SYSPUNCH) and the 42 intrinsic function names should not be used as aliases for reserved words. If a function name is specified as an alias through the reserved word table ABBR control-statement, that function name will be recognized and diagnosed by the compiler as a reserved word and the intrinsic function will not be performed.
3. Changing the default value of the WORD=XXXX option conflicts with all values for FLAGSTG other than no.

XMLPARSE

Syntax



Default

XMLPARSE=XMLSS

XMLSS

XML PARSE statements are processed using the z/OS XML System Services parser. The following XML parsing capabilities are available only when this suboption is in effect:

- Namespace processing enhancements
- The ENCODING and RETURNING NATIONAL phrases of the XML PARSE statement
- Support for direct parsing of XML documents encoded in UTF-8
- Support for parsing very large XML documents, a buffer of XML at a time
- Offload of COBOL XML parsing to zAAP specialty processors

COMPAT

XML PARSE statements are processed using the XML parser that is a built-in component of the COBOL library. The XML PARSE statement operational behaviors and results are compatible with those of Version 3 of Enterprise COBOL.

XREFOPT

Syntax



Default

XREFOPT=FULL

SHORT

Produces only the explicitly referenced variables in the cross-reference listing.

FULL

Produces both a sorted and embedded cross-reference listing. If SOURCE=YES is also specified, the listing line numbers cross-reference recurrences of particular data-names.

NO

Suppresses the cross-reference listing.

Notes:

1. The XREFOPT option sets the default value for the compiler option XREF.
2. The XREFOPT=NO option conflicts with values for DBCSXREF other than NO.

YRWINDOW

Syntax



Default

YRWINDOW=1900

integer

Specifies the first year of the 100-year window used by COBOL windowed date fields, and may be one of the following:

- An unsigned decimal integer from 1900 through 1999.
- A negative decimal integer from -1 through -99, representing an offset from the current year at run time. The current year is determined for each compilation unit when it is first initialized, or reinitialized after execution of a CANCEL statement that refers to the compilation unit.

Note:

1. YRWINDOW has no effect unless DATEPROC=FLAG or DATEPROC=NOFLAG is specified.
2. At run time, two conditions must be true:
 - a. The 100-year window must have its beginning year in the 1900s.
 - b. The current year must lie within the 100-year window for the compilation unit.
3. All windowed dates have a year relative to the base year. For example, if the base year were specified as 1965, all windowed year values would be interpreted as years within the 100-year window of 1965 to 2064, inclusive. So, a windowed year value of 67 would represent the year 1967, whereas a windowed year value of 05 would represent the year 2005.

If the base year were specified as -30, then the window would depend on when the application were run. Running it during 2000 would give a 100-year window of 1970 through 2069. So, a windowed year value of 70 would represent the year 1970, whereas a windowed year value of 69 would represent the year 2069.
4. The YRWINDOW installation option is equivalent to the YEARWINDOW compile-time option.

ZWB

Syntax



Default

ZWB=YES

YES

Removes the sign from a signed external decimal (DISPLAY) field when comparing this field to an alphanumeric field at run time.

NO

Does not remove the sign from a signed external decimal (DISPLAY) field when comparing this field to an alphanumeric field at run time.

Note:

1. Setting this option affects program runtime logic; that is, the same COBOL source program can give different results, depending on the option setting. Verify whether your Enterprise COBOL source programs assume a particular setting to run correctly.
2. Application programmers use ZWB=NO to test input numeric fields for SPACES.

Chapter 3. Customizing Enterprise COBOL

You can make modifications to Enterprise COBOL only after installation of the product is complete. One of the modifications is made using an SMP/E USERMOD. If you do not ACCEPT Enterprise COBOL into the distribution libraries before applying the USERMOD, you will not be able to use the SMP/E RESTORE statement to remove your USERMOD. Do not accept your USERMOD into the distribution libraries. You might want to remove your USERMOD if you find that it does not suit the needs of the programmers at your site.

You will have to remove your USERMOD before applying service to the modules that it changes. In this case, you will probably want to reapply your USERMOD after successful installation of the service.

Important

Make sure that Enterprise COBOL serves the needs of the application programmers at your site. Confer with them while you plan the customization of Enterprise COBOL. Doing so will ensure that the modifications you make at install time best support the application programs being developed at your site.

Note: All information for installing Enterprise COBOL is included in the Program Directory provided with the product.

Summary of user modifications

Installation of Enterprise COBOL places a number of sample modification jobs in the target data set IGY.V4R1M0.SIGYSAMP. Table 7 shows the names of the sample modification jobs, which are described in detail in the following sections.

The sample modification jobs that IBM provides are not customized for your particular system. You must customize them.

Copy members from IGY.V4R1M0.SIGYSAMP into one of your personal data sets before you modify and submit them so that you have an unmodified backup copy if you make changes that you want to abandon.

Descriptions of possible modifications appear in the comments in the JCL. You can use TSO to modify and submit the job. Save the modified JCL for future IGYWMLPA reference.

Table 7. Summary of user modification jobs for Enterprise COBOL

Description	Job	See:
Change compiler module	IGYWDOPT	“Changing compiler options default module” on page 56
Create an options module to override compiler options specified as fixed	IGYWUOPT	“Creating an options module to override options specified as fixed” on page 57
Create additional reserved word table	IGYWRWD	“Creating or modifying additional reserved word tables” on page 57

Table 7. Summary of user modification jobs for Enterprise COBOL (continued)

Description	Job	See:
Place Enterprise COBOL modules in shared storage	IGYWMLPA	“Placing Enterprise COBOL modules in shared storage” on page 63

Changing the defaults for compiler options

To change the defaults for compiler options or create a compiler-options module to override fixed options, copy the source of options module IGYCDOPT from IGY.V4R1M0.SIGYSAMP into the appropriate job in place of the two-line comment. Then change the parameters on the IGYCOPT macro call to match the compiler options that you have selected for your installation. Observe the following requirements in coding your changed IGYCOPT macro call:

- Place continuation character (X in the source) must be present in column 72 on each line of the IGYCOPT invocation except the last line. The continuation line must start in column 16. You can break the coding after any comma.
- Do not put a comma in front of the first option in your macro.
- Specify options and suboptions in uppercase. Only suboptions that are strings can be specified in mixed case or lowercase. For example both LVLINFO=(Fix1) and LVLINFO=(FIX1) are acceptable.
- If one of the string suboptions contains a special character, (for example, an embedded blank or unmatched right or left parenthesis), the string must be enclosed in apostrophes ('), not in quotes ("). A null string can be specified with either contiguous apostrophes or quotes.

To obtain an apostrophe (') or a single ampersand (&) within a string, two contiguous instances of the character must be specified. The pair is counted as only one character in determining whether the maximum allowable string length has been exceeded and in setting the effective length of the string.

- Avoid unmatched apostrophes in any string that uses apostrophes. The error cannot be captured within IGYCOPT itself. Instead, the assembler produces a message such as:

```
IEV03 *** ERROR *** NO ENDING APOSTROPHE
```

This message bears no spatial relationship to the offending suboption. Furthermore, none of the options are properly parsed if this error is committed.

- Code only the options whose default value you want to change. The IGYCOPT macro supplies the IBM-supplied defaults for any option that you do not code. See “IGYCDOPT worksheet for compiler options” on page 3 for a worksheet to help you plan your default compiler options. See Chapter 2, “Enterprise COBOL compiler options,” on page 13 for descriptions of the options.
- Place an END statement after the macro instruction.

Changing compiler options default module

Use the sample job IGYWDOPT to change the defaults for the Enterprise COBOL compiler options. Use the information in Chapter 2, “Enterprise COBOL compiler options,” on page 13 to select your default values.

If you coded OUT as the value for any compiler phase options, be sure to place these phases in shared storage before compiling a program by using your new compiler options default module. See “Compiler phases and their defaults” on page 6 and “Placing Enterprise COBOL modules in shared storage” on page 63 for more information.

To modify the JCL for IGYWDOPT, do these steps:

1. Add a job card appropriate for your site.
2. Add a JES ROUTE card if required for your site.
3. Replace the two comment lines in IGYWDOPT with a copy of the source for IGYCDOPT found in IGY.V4R1M0.SIGYSAMP.
4. Code parameters on the IGYCOPT macro statement in IGYCDOPT to reflect the values you have chosen for your installation-wide default compiler options.
5. Change #GLOBALCSI to the global CSI name.
6. Change #TZONE in the SET BDY statement to the target zone name.

After you modify the IGYWDOPT job, submit it. You will get a condition code of 0 if the job runs correctly. Also check the IGYnnnn informational messages in your listing to verify the defaults that will be in effect for your installation.

Creating an options module to override options specified as fixed

If you have specified some options as fixed in your compiler default options module, you might occasionally find an application that needs to override a fixed option. You can provide other options by creating a temporary copy of the options module in a separate data set that can be accessed as a STEPLIB or JOBLIB (ahead of the IGY.V4R1M0.SIGYCOMP data set) when the application is compiled. Sample job IGYWUOPT creates a default options module that is link-edited into a user-specified data set. The assembly and link-editing take place outside SMP/E control, so the standard default options module is not disturbed.

To modify the JCL for IGYWUOPT, do these steps:

1. Add a job card appropriate for your site.
2. Add a JES ROUTE card if required for your site.
3. Replace the two comment lines in IGYWUOPT with a copy of the source for IGYCDOPT found in IGY.V4R1M0.SIGYSAMP.
4. Change the parameters on the IGYCOPT macro statement in IGYWUOPT to reflect the values that you have chosen for this fixed option override compiler-options module.
5. If you chose to use a different prefix than the IBM-supplied one for the Enterprise COBOL target data sets, check the SYSLIB DD statement (marked with '<<<<<') to ensure that the data set names are correct.
6. Change DSNAME=YOURLIB in the SYSLMOD DD statement to the name of the partitioned data set that you want your IGYCDOPT module linked into. Note that an IGYCDOPT module currently in the chosen data set will be replaced by the new version.

After you modify the IGYWUOPT job, submit it. Both steps should return a condition code of 0 if the job runs successfully. Also check the IGYnnnn informational messages in your listing to verify the defaults that are in effect when this module is used in place of the standard default options module.

Creating or modifying additional reserved word tables

The reserved words used by the Enterprise COBOL-compiler are maintained in a table (IGYCRWT) provided with the product. A CICS-specific reserved word table (IGYCCICS) is provided as an alternate reserved word table. See “CICS reserved word table (IGYCCICS)” on page 11. You can change the reserved words by using

the reserved word table utility (IGY8RWTU), to modify IGYCRWT or IGYCCICS, or by creating additional reserved word tables. You can also modify tables that you previously created.

The reserved word table utility accepts control statements that you can use to create or modify a reserved word table. The new table then contains the reserved words from the IBM-supplied table with all the changes that you have applied.

You can make the following types of changes to reserved word tables:

- Add words to be flagged with an informational message whenever they are used in a program. To produce these information messages, you must modify the IGYCRWT reserved word table and compile using the FLAGSTD option.
- Add words to be flagged with a severe error message whenever they are used in a program.
- Indicate that words currently flagged with an informational or error message should no longer be flagged.

Each reserved word table that you create must have a unique 1- to 4-character identifier. For a list of 1- to 4-character strings that cannot be used, see the compiler options "WORD=xxxx".

At compile time, the value of the compiler option **WORD(xxxx)** identifies the reserved word table to be used. **xxxx** is the unique 1- to 4-character identification that you specified in the member name IGYCxxxx. You can create multiple reserved word tables, but only one can be specified at compile time.

Note: The total number of entries in a reserved word table should not exceed 1536 or 1.5-KB.

Because of the following example, when the IBM extension reserved word ENTRY is used in a program, it will be flagged with message 0086.

```
INFO  ENTRY
```

The following example restricts the use of Boolean, XD, and PARENT. Use of these will cause errors.

```
RSTR  BOOLEAN
      XD
      PARENT
```

The following example restricts the use of GO TO and ALTER. Use of these will cause errors.

```
RSTR  GO
      ALTER
```

In the following example, the reserved word table generated allows usage of all COBOL 85 Standard language except nested programs.

```
RSTR IDENTIFICATION(1)  only allow 1 program per compilation unit
RSTR ID(1)              same for the short form
RSTR PROGRAM-ID(1)     only allow 1 program per compilation unit
RSTR GLOBAL             do not allow this phrase at all
```

Creating or modifying a reserved word table

To create or modify a reserved word table, you must edit a copy of the appropriate source file:

- Member IGY8RWRD in IGY.V4R1M0.SIGYSAMP (the IBM-supplied default reserved word table)
- Member IGY8CICS in IGY.V4R1M0.SIGYSAMP (the IBM-supplied CICS reserved word table)
- A user file (user-supplied reserved word table)

You must also modify and invoke the appropriate non-SMP/E JCL.

Your file should have four parts: Parts I, II, III, and IV. Modify the file and non-SMP/E JCL as follows:

1. Make a private copy of the file.
2. Skip Part I (all lines up to and including the line with the keyword MOD). Make *no* alternations in this part of the file!
3. Edit Part II by placing asterisks in column 1 of the lines that contain CODASYL reserved words for which you do not want informational messages issued.
4. Edit Part III by placing asterisks in column 1 of the lines that contain reserved words for which you do not want severe messages issued.
5. Edit Part IV by coding additional reserved word control statements that create the modifications that you want, as described under “Coding control statements.”
6. Modify and run the JCL, as discussed under “Modifying and running JCL to create a new reserved word table” on page 62. You also must create a unique 1- to 4-character identification for the new reserved word table and supply it in the JCL.

Coding control statements

To create a reserved word table, you must understand the syntax rules for the control statements and for the operands within control statements.

Figure 2 illustrates the format for coding reserved word processor control statements.

```

ABBR   reserved-word: user-word [comments]
       [reserved-word: user-word [comments]]

:
INFO   COBOL-word [(0 | 1)] [comments]
       [COBOL-word [(0 | 1)] [comments]]

:
RSTR   COBOL-word [(0 | 1)] [comments]
       [COBOL-word [(0 | 1)] [comments]]

:

```

Figure 2. Syntax format for reserved word processor control statements

As shown in Figure 2, keywords you can use are:

ABBR Specifies an alternative form of an existing reserved word

INFO Specifies words that are to be flagged with an informational message whenever they are used in a program and the FLAGSTD compiler option is in effect

|
|

RSTR Specifies words that are to be flagged with an error message whenever they are used in a program

Note: All words that you identify with the control statement keywords **INFO** and **RSTR** are flagged with a message in the source listing of the Enterprise COBOL program that uses them. Words that are abbreviated are not flagged in the source listing unless you have also specified them on the **INFO** or **RSTR** control statements.

Rules for coding control statements

When you code your control statements, follow these rules:

- Begin the control statement in column 1.
- Place one or more spaces between the keyword and the first operand.
- When specifying a second operand, include a colon (:) and one or more spaces after the first operand.
- Continue a control statement by putting blanks in columns 1 through 5, followed by the operand or operands, to make additional specifications.
- Specify comments by putting an asterisk (*) in column 1 of the control statements. You can also place comments on the same line as the control statement. In that case, however, there must be at least one space following the operand or operands before a comment begins.
- To specify more than one change within a single control statement, put each additional specification on a separate line.
- Do not add any blank lines.

Coding operands in control statements

The following list shows the types of operands that you will be coding in the control statements:

reserved-word

An existing reserved word.

user-word

A user-defined COBOL word that is not a reserved word.

comments

Any comments that you want to put on the same line with the control statement, or on a separate line that has an asterisk in column 1.

COBOL-word

A word of up to 30 characters that can be a system name, a reserved word, or a user-defined word.

Rules for coding control statement operands

When you code the control statement operands, follow these rules:

- A **user-word** can be used in only one **ABBR** statement in any particular reserved word table.
- A **reserved-word** specified in an **ABBR** statement can also be specified in either a **RSTR** or an **INFO** statement.
- A particular **reserved-word** can be specified only once in an **ABBR** statement.
- A particular **COBOL-word** can be specified only once in either a **RSTR** or an **INFO** statement.

The remaining sections provide examples for coding each type of control statement.

ABBR statement

ABBR reserved-word: user-word [comments]

Defines an alternative symbol for the reserved word specified. The symbol can be used when you code a program.

Note:

1. The user-word becomes a reserved word and can be used in place of the reserved-word specified in this statement.
2. The reserved-word remains a reserved word with its original definition.
3. The source listing shows the original source—the symbol as you coded it.
4. The reserved word is used in compiler output—other listings, some messages, and so forth.

In the following example, REDEF and SEP become abbreviations that can be used in source programs. The appropriate reaction to the use of REDEFINES and SEPARATE takes place when the source program is compiled.

```
ABBR  REDIFINES: REDEF  
SEPARATE:  SEP
```

INFO statement

INFO COBOL-word[(0 | 1)] [comments]

This statement specifies the COBOL words that are to be flagged by the compiler.

This statement can also be used to control the use of nested programs. By selecting either 1 or 0, you can indicate whether a specific COBOL-word can be used only once, or not at all.

- | | |
|---|---|
| 0 | Indicates that whenever the specified COBOL-word is used, the 0086 informational message is issued if the FLAGSTD compiler option is in effect. |
| 1 | Indicates that the specified COBOL-word can be used once. If it is used more than once, informational message 0195 is issued. |

The messages are handled as information (I) messages. The compilation condition is not changed.

RSTR statement

RSTR COBOL-word[(0 | 1)] [comments]

This statement specifies COBOL words that cannot be used in a program.

This statement can also be used to control the use of nested programs. By selecting either 1 or 0, you can indicate whether a specific COBOL-word can be used only once, or not at all.

- | | |
|---|--|
| 0 | Indicates that whenever the specified COBOL-word is used, message 0084 is issued. |
| 1 | Indicates that the specified COBOL-word can be used once. If it is used more than once, severe message 0194 is issued. |

Note: The following reserved words can be restricted with the 1 option only:

IDENTIFICATION
FD
ENVIRONMENT
DATA
WORKING-STORAGE
PROCEDURE
DIVISION
SECTION
PROGRAM-ID

Modifying and running JCL to create a new reserved word table

The JCL that you use to create a new reserved word table contains STEP1, STEP2, and STEP3, which do the following, respectively:

- Run the reserved word table utility with your modified table.
- Assemble your modified reserved word table.
- Produce a runtime load module from the object module.

After you run the job, a new reserved word table is created, the library that you specified contains the new table, and the table has IGYC plus the 1- to 4-character identification that you specified.

Modifying and running non-SMP/E JCL

Use sample job IGYWRWD in IGY.V4R1M0.SIGYSAMP to create or modify a reserved word table. The sample job uses a member based on IGY8RWRD or IGY8CICS in IGY.V4R1M0.SIGYSAMP as the input to the reserve word utility. It creates load module IGYCxxxx (where xxxx is the user identification) in IGY.V4R1M0.SIGYCOMP. Before you run the job, do the following steps:

To modify the JCL for IGYWRWD, do these steps:

1. Modify the job statement for your site.
2. Add JES ROUTE records if desired.
3. Change the data set name on the STEPLIB DD statement in STEP1 to match the compiler target data set name you used during installation.
4. Do *one* of the following steps to point to your modified reserved word table:
 - Change the data set name in //RSWDREAD DD DSN=... to the data set name and member name of your modified reserved word table, or
 - Replace the RSWDREAD DD with //RSWDREAD DD * and insert your modified reserved table immediately following that line.

Note: For specific instructions, see the comments in job IGYWRWD.

5. Change the name of the data set on the SYSLMOD DD statement in STEP3 to match the name of the data set to which you are adding your modified reserved word table. (The data set name on the SYSLMOD DD statement should be the name of the compiler target data set.) Also, you must specify the name of your modified reserved word table in the parentheses that follow the data set name on the SYSLMOD DD statement.

If, after you run IGYWRWD, you receive a nonzero return code from the table utility, use the error messages in the output data set specified on the RSWDPRNT DD statement to correct any mistakes and rerun the job.

Placing Enterprise COBOL modules in shared storage

All of the modules in IGY.V4R1M0.SIGYCOMP that are reentrant can be included in shared storage by:

- Authorizing the data set IGY.V4R1M0.SIGYCOMP
- Including IGY.V4R1M0.SIGYCOMP in the LNKLSTnn concatenation (optional)
- Creating an IEALPAnn member in SYS1.PARMLIB that lists the modules to be made resident in the MLPA when the system is IPLed

IGYWMLPA is installed in IGY.V4R1M0.SIGYSAMP for you to use as an example in creating your IEALPAnn member.

Under z/OS, you do not need to place IGY.V4R1M0 in the LNKLSTnn concatenation to be able to load modules into the LPA. If you choose not to add it to the LNKLSTnn concatenation, you must make the modules that are not included in the LPA available to steps that compile Enterprise COBOL applications by *one* of these means:

- Copying the non-LPA modules to a data set that is in the LNKLSTnn concatenation
- Copying the non-LPA modules to a data set that can be used as a STEPLIB or JOBLIB

Using the entire IGY.V4R1M0.SIGYCOMP data set as a STEPLIB or JOBLIB defeats the purpose of placing the modules in the LPA because modules are loaded from a STEPLIB or JOBLIB before the LPA is searched.

Modules that you copy into another data set are not serviced automatically by SMP/E in that data set. You must rerun your copy job after you apply service to Enterprise COBOL to make the updated modules available in the LNKLSTnn data set or in the STEPLIB.

Refer to the following publications for more information about including modules in the LPA:

- *z/OS MVS Initialization and Tuning Guide, SA22-7591*
- *z/OS MVS Initialization and Tuning Reference, SA22-7592*

If you are placing compiler phases in shared storage, code the corresponding phase options with the value OUT when you run the sample job IGYWDOPT to change the compiler options defaults. See “Changing the defaults for compiler options” on page 56 for more information.

Tailoring the cataloged procedures to your site

You might want to tailor the cataloged procedures IGYWC, IGYWCL, IGYWCLG, IGYWCG, IGYWCPL, IGYWCPLG, IGYWCPG, and IGYWPL for use at your site. Changes to consider are:

- Modifying the data set name prefixes if you chose to use a different prefix than the IBM-supplied ones for Enterprise COBOL or Language Environment target data sets.
- Removing the STEPLIB DD statements if you have placed IGY.V4R1M0.SIGYCOMP and CEE.SCEERUN in the LINKLIST concatenation.
- Changing the default region size for the GO steps if most of the programs at your site require a larger region for successful execution.

- Changing the UNIT=parameter.

Appendix. Notices

This information was developed for products and services offered in the U.S.A.

IBM may not offer the products, services, or features discussed in this document in other countries. Consult your local IBM representative for information on the products and services currently available in your area. Any reference to an IBM product, program, or service is not intended to state or imply that only that IBM product, program, or service may be used. Any functionally equivalent product, program, or service that does not infringe any IBM intellectual property right may be used instead. However, it is the user's responsibility to evaluate and verify the operation of any non-IBM product, program, or service.

IBM may have patents or pending patent applications covering subject matter described in this document. The furnishing of this document does not grant you any license to these patents. You can send license inquiries, in writing, to:

IBM Director of Licensing
IBM Corporation
North Castle Drive
Armonk, NY 10504-1785
U.S.A.

For license inquiries regarding double-byte (DBCS) information, contact the IBM Intellectual Property Department in your country or send inquiries, in writing, to:

IBM World Trade Asia Corporation
Licensing
2-31 Roppongi 3-chome, Minato-ku
Tokyo 106-0032, Japan

The following paragraph does not apply to the United Kingdom or any other country where such provisions are inconsistent with local law:

INTERNATIONAL BUSINESS MACHINES CORPORATION PROVIDES THIS PUBLICATION "AS IS" WITHOUT WARRANTY OF ANY KIND, EITHER EXPRESS OR IMPLIED, INCLUDING, BUT NOT LIMITED TO, THE IMPLIED WARRANTIES OF NON-INFRINGEMENT, MERCHANTABILITY OR FITNESS FOR A PARTICULAR PURPOSE. Some states do not allow disclaimer of express or implied warranties in certain transactions, therefore, this statement may not apply to you.

This information could include technical inaccuracies or typographical errors. Changes are periodically made to the information herein; these changes will be incorporated in new editions of the publication. IBM may make improvements and/or changes in the product(s) and/or the program(s) described in this publication at any time without notice.

Any references in this information to non-IBM Web sites are provided for convenience only and do not in any manner serve as an endorsement of those Web sites. The materials at those Web sites are not part of the materials for this IBM product and use of those Web sites is at your own risk.

IBM may use or distribute any of the information you supply in any way it believes appropriate without incurring any obligation to you.

Licensees of this program who wish to have information about it for the purpose of enabling: (i) the exchange of information between independently created programs and other programs (including this one) and (ii) the mutual use of the information which has been exchanged, should contact:

IBM Corporation
J46A/G4
555 Bailey Avenue
San Jose, CA 95141-1003
U.S.A.

Such information may be available, subject to appropriate terms and conditions, including in some cases, payment of a fee.

The licensed program described in this information and all licensed material available for it are provided by IBM under terms of the IBM Customer Agreement, IBM International Program License Agreement, or any equivalent agreement between us.

Any performance data contained herein was determined in a controlled environment. Therefore, the results obtained in other operating environments may vary significantly. Some measurements may have been made on development-level systems and there is no guarantee that these measurements will be the same on generally available systems. Furthermore, some measurements may have been estimated through extrapolation. Actual results may vary. Users of this document should verify the applicable data for their specific environment.

Information concerning non-IBM products was obtained from the suppliers of those products, their published announcements or other publicly available sources. IBM has not tested those products and cannot confirm the accuracy of performance, compatibility or any other claims related to non-IBM products. Questions on the capabilities of non-IBM products should be addressed to the suppliers of those products.

All statements regarding IBM's future direction or intent are subject to change or withdrawal without notice, and represent goals and objectives only.

COPYRIGHT LICENSE:

This information contains sample application programs in source language, which illustrate programming techniques on various operating platforms. You may copy, modify, and distribute these sample programs in any form without payment to IBM, for the purposes of developing, using, marketing or distributing application programs conforming to the application programming interface for the operating platform for which the sample programs are written. These examples have not been thoroughly tested under all conditions. IBM, therefore, cannot guarantee or imply reliability, serviceability, or function of these programs.

Each copy or any portion of these sample programs or any derivative work, must include a copyright notice as follows:

© (your company name) (year). Portions of this code are derived from IBM Corp. Sample Programs. © Copyright IBM Corp. _enter the year or years_. All rights reserved.

If you are viewing this information softcopy, the photographs and color illustrations may not appear.

Programming interface information

Enterprise COBOL for z/OS provides no macros that allow a customer installation to write programs that use the services of Enterprise COBOL for z/OS.

Attention: Do not use as programming interfaces any Enterprise COBOL for z/OS macros.

Trademarks

The following terms are trademarks of International Business Machines Corporation in the United States, other countries, or both:

IBM
The IBM logo
ibm.com
BookManager
CICS
COBOL/370
DB2
DFSORT
Language Environment
MVS
OS/390
S/390
System z
z/Architecture
z/OS

Java and all Java-based trademarks are trademarks of Sun Microsystems, Inc. in the United States, other countries, or both.

Other company, product, or service names may be trademarks or service marks of others.

List of resources

Enterprise COBOL for z/OS

Compiler and Runtime Migration Guide, GC23-8527
Customization Guide, SC23-8526
Language Reference, SC23-8528
Licensed Product Specifications, GI11-7871
Program Directory, GI11-7870
Programming Guide, SC23-8529

z/OS Language Environment

z/OS Language Environment Concepts Guide, SA22-7567
z/OS Language Environment Debugging Guide, GA22-7560
z/OS Language Environment Run-Time Messages, SA22-7566
z/OS Language Environment Customization, SA22-7564
z/OS Language Environment Programming Guide, SA22-7561
z/OS Language Environment Programming Reference, SA22-7562
z/OS Language Environment Run-Time Migration Guide, GA22-7565
z/OS Language Environment Writing Interlanguage Communication Applications, SA22-7563

Related publications

American National Standard ANSI INCITS 23-1985, Programming languages - COBOL, as amended by *ANSI INCITS 23a-1989, Programming Languages - Intrinsic Function Module for COBOL*, and *ANSI INCITS 23b-1993, Programming Languages - Correction Amendment for COBOL*
CCCA User's Guide, SC26-9400
CICS Transaction Server Application Programming Guide, SC34-6818
CICS Transaction Server Application Programming Reference, SC34-6819
CICS Transaction Server Customization Guide, SC34-6814

CICS Transaction Server External Interfaces Guide, SC34-6830

DBCS Ordering Support Program (DBCSOS): Program Description, N:SH18-0144 (in Japanese)

DB2 for z/OS Installation Guide, GC18-9846

DB2 for z/OS Internationalization Guide (Unicode), SC19-1161

Debug Tool User's Guide, SC19-1196

Debug Tool Reference and Messages, GC19-1198

International Standard ISO 1989:1985,

Programming languages - COBOL, as amended by *ISO/IEC 1989/AMD1:1992, Programming languages - COBOL - Intrinsic function module*, and *ISO/IEC 1989/AMD2:1994, Programming languages - Correction and clarification amendment for COBOL*

z/OS MVS Initialization and Tuning Guide, SA22-7591

z/OS MVS Initialization and Tuning Reference, SA22-7592

z/OS Support for Unicode: Using Conversion Services, SA22-7649

IBM SMP/E for z/OS User's Guide, SA22-7773

IBM SMP/E for z/OS Reference, SA22-7772

TSO/E Primer, SA22-7787

TSO/E User's Guide, SA22-7794

ISPF User's Guide Volume I, SC34-4822

Softcopy publications

The following collection kits contain COBOL and other product publications:

- *Software Products Collection*, SK3T-4270
- *z/OS and Software Products DVD Collection*, SK3T-4271

The following collection kit contains z/OS and related product publications:

- *z/OS Collection*, SK3T-4269

Index

A

accessibility
 of Enterprise COBOL xi
 of this document xii
 using z/OS xi
ADATA compiler option 15
ADEXIT compiler option 15
ADV compiler option 16
ALOWCBL compiler option 16
ARITH compiler option 17
ASM1 phase 7
ASM2 phase 7
assistive technologies xi
AWO compiler option 17

B

BUF compiler option 18

C

CBL statement 16
CICS reserved word table 11
COMPILE compiler option 19
compiler options
 conflicting options 13
 default values 1
 description of
 ADATA 15
 ADEXIT 15
 ADV 16
 ALOWCBL 16
 ARITH 17
 AWO 17
 BUF 18
 COMPILE 19
 CURRENCY 20
 DATA 21
 DATEPROC 22
 DBCS 23
 DBCSXREF 23
 DECK 24
 DIAGTRUNC 24
 DLL 25
 DYNAM 25
 EXPORT 26
 FASTSRT 26
 FLAG 27
 FLAGSTD 28
 INEXIT 29
 INTDATE 30
 LANGUAGE 30
 LIB 31
 LIBEXIT 31
 LINECNT 32
 LIST 32
 LITCHAR 33
 LVLINFO 33
 MAP 33
 MDECK 34

compiler options (*continued*)

 description of (*continued*)

 NAME 34
 NUM 35
 NUMCLS 36
 NUMPROC 36
 OBJECT 37
 OFFSET 37
 OPTIMIZE 38
 OUTDD 39
 PGMNAME 39
 PRTEXT 40
 RENT 40
 RMODE 41
 SEQ 42
 SIZE 42
 SOURCE 43
 SPACE 43
 SQL 44
 SQLSSCID 44
 SSRANGE 45
 TERM 45
 TEST 46
 TRUNC 48
 VBREF 49
 WORD 50
 XMLPARSE 51
 XREFOPT 51
 YRWINDOW 52
 ZWB 52

 fixed options 2
 modifying 3, 56
 planning worksheet 3
 setting defaults for 1, 56
 storage allocation 18

compiler phases

 defaults for 6

 description of

 ASM1 7
 ASM2 7
 DIAG 7
 DMAP 7
 FGEN 7
 INIT 7
 LIBR 8
 LSTR 8
 MSGT 8
 OPTM 8
 OSCN 8
 PGEN 8
 RCTL 9
 RWT 9
 SCAN 9
 SIMD 9
 XREF 9

 fixed phases 5

 INOUT parameters 6

 macro worksheet 10

 modifying 3

 placing in shared storage 5

CURRENCY compiler option 20

customization

 compiler options 13, 56
 installation jobs
 Enterprise COBOL 55
 planning for 1

D

DATA compiler option 21
DATEPROC compiler option 22
DBCS compiler option 23
DBCSXREF compiler option 23
Debug Tool 46
DECK compiler option 24
default reserved word table 11
default values
 compiler options 1
 compiler phases 6
DIAG phase 7
DIAGTRUNC compiler option 24
DLL compiler option 25
DMAP phase 7
DYNAM compiler option 25

E

Enterprise COBOL
 job modification 55
error messages
 flagging 27
EXPORT compiler option 26

F

FASTSRT option 26
FGEN phase 7
fixed compiler options 2
FLAG compiler option 27
FLAGSTD compiler option 28
format notation, description ix

I

IGYCCICS (CICS reserved word table) 11
IGYCDOPT
 AMODE 31 and 1
 planning worksheet 3
 RMODE ANY and 1
 using with IGYCDOPT program 1
IGYCOPT
 syntax format 3
IGYCRWT (default reserved word table) 11
index checking 45
INEXIT compiler option 29
INIT phase 7
INTDATE compiler option 30

K

keyboard navigation xi
keywords x

L

LANGUAGE compiler option 30
LIB compiler option 31
LIBEXIT compiler option 31
LIBR phase 8
LINECNT compiler option 32
LIST compiler option 32
LITCHAR compiler option 33
LSTR phase 8
LVLINFO compiler option 33

M

macros
 IGYCDOPT (compiler options)
 planning worksheet 3
 syntax format 3
 IGYCDOPT (compiler phases)
 planning worksheet 10
 syntax format 3
MAP compiler option 33
MDECK compiler option 34
messages, flagging 27
MSGT phase 8

N

NAME compiler option 34
nested programs 10
notation, syntax ix
NUM compiler option 35
NUMCLS compiler option 36
NUMPROC compiler option 36

O

object code, reentrant 40
OBJECT compiler option 37
OFFSET compiler option 37
OPTIMIZE compiler option 38
optional words ix
OPTM phase 8
OSCN phase 8
OUTDD compiler option 39

P

PGEN phase 8
PGMNAME compiler option 39
phases, compiler
 defaults for 6
 macro worksheet 10
 modifying 3
 placing in shared storage 5
planning worksheets
 description of x
 IGYCDOPT (compiler options) 3
 IGYCDOPT (compiler phases) 10
preface ix

PROCESS (CBL) statement 16
PRTEXT compiler option 40
publications 69

R

RCTL phase 9
reentrant object code 40
RENT compiler option 40
required words ix
reserved word table
 contents of 11
 creating or modifying 57
 nested programs 10
 planning for 10
 specifying an alternative table 50
 supplied with Enterprise COBOL
 IGYCCICS 11
 IGYCNOOO 11
 IGYCRWT (default reserved word
 table) 11
residency mode 41
RMODE compiler option 41
rules for syntax notation ix
RWT phase 9

S

sample installation jobs 2
SCAN phase 9
sequence checking of line numbers 42
SEQUENCE compiler option 42
shared storage
 compiler phases in 5, 6
 placing Enterprise COBOL modules
 in 63
 planning for 5
SIMD phase 9
SIZE compiler option 42
SOURCE compiler option 43
SPACE compiler option 43
SQL compiler option 44
SQLCCSID compiler option 44
SSRANGE compiler option 45
stacked words ix
subscript checking 45
symbols for syntax notation ix
syntax checking 19
syntax notation
 COBOL keywords x
 description of ix
 repeat arrows x
 rules for ix
 symbols used in ix
SYSLIN 37
SYSOUT 39
SYSPUNCH 24
SYSTEM 46

T

TERM compiler option 45
TEST compiler option 46
THREAD 47
TRUNC compiler option 48

U

user exit routine
 ADEXIT compiler option 15
 LIBEXIT option 31
 PRTEXT option 40

V

VBREF compiler option 49

W

WORD compiler option 50

X

XMLPARSE compiler option 51
XREF compiler option 51
XREF phase 9
XREFOPT option 51

Y

YRWINDOW compiler option 52

Z

ZWB compiler option 52

Readers' Comments — We'd Like to Hear from You

Enterprise COBOL for z/OS
Customization Guide
Version 4 Release 1

Publication No. SC23-8526-00

We appreciate your comments about this publication. Please comment on specific errors or omissions, accuracy, organization, subject matter, or completeness of this book. The comments you send should pertain to only the information in this manual or product and the way in which the information is presented.

For technical questions and information about products and prices, please contact your IBM branch office, your IBM business partner, or your authorized remarketer.

When you send comments to IBM, you grant IBM a nonexclusive right to use or distribute your comments in any way it believes appropriate without incurring any obligation to you. IBM or any other organizations will only use the personal information that you supply to contact you about the issues that you state on this form.

Comments:

Thank you for your support.

Submit your comments using one of these channels:

- Send your comments to the address on the reverse side of this form.

If you would like a response from IBM, please fill in the following information:

Name

Address

Company or Organization

Phone No.

E-mail address



Fold and Tape

Please do not staple

Fold and Tape




NO POSTAGE
NECESSARY
IF MAILED IN THE
UNITED STATES

BUSINESS REPLY MAIL

FIRST-CLASS MAIL PERMIT NO. 40 ARMONK, NEW YORK

POSTAGE WILL BE PAID BY ADDRESSEE

IBM Corporation
Reader Comments
DTX/E269
555 Bailey Avenue
San Jose, CA
U.S.A. 95141-9989



Fold and Tape

Please do not staple

Fold and Tape



Program Number: 5655-S71

Printed in USA

SC23-8526-00

