

CICS Online Transmission Time Optimizer



User's Guide

Version 1 Release 2

CICS Online Transmission Time Optimizer



User's Guide

Version 1 Release 2

Note

Before using this information and the product it supports, be sure to read the general information under Appendix G, "Notices," on page 133.

This edition applies to Version 1 Release 2 of CICS® Online Transmission Time Optimizer, program number 5655-I05, and to all subsequent versions, releases, and modifications until otherwise indicated in new editions.

© **Copyright International Business Machines Corporation 1991, 2011. All rights reserved.**

US Government Users Restricted Rights – Use, duplication or disclosure restricted by GSA ADP Schedule Contract with IBM Corp.

© **Software Engineering GmbH, 1987, 2011. All rights reserved**

US Government Users Restricted Rights – Use, duplication or disclosure restricted by GSA ADP Schedule Contract with IBM Corp.

TABLE OF CONTENTS

FIGURES LIST	V
TABLES LIST	VII
PREFACE.....	IX
Who Should Use This Book	ix
How to Use This Book.....	ix
Contacting IBM support.....	xi
How to Send Your Comments	xi
Where to Get More Information	xi
What's New in Release 1.2	xii
CHAPTER 1: OPTIMIZATION FEATURES.....	1
1.1 Controlling Optimization	2
1.1.1 Component Based Optimization Control.....	3
1.1.2 LU Based Optimization Control	3
1.1.3 Module Based Optimization Control.....	4
1.2 3270 Optimization Techniques.....	5
1.2.1 Imaging.....	5
1.2.2 Field Merge Optimization	6
1.2.3 Blank Elimination	6
1.3 SCS Optimization Techniques.....	6
1.4 3600/4700 Optimization Techniques	7
1.5 Optimization Tracing Options	7
CHAPTER 2: INSTALLING CICS OTTO	9
2.1 Job Descriptions	9
2.2 System Changes	10
CHAPTER 3: OPERATING CICS OTTO	11
3.1 CICS Startup	11
3.2 CICS Normal Operation.....	11
3.3 CICS Shutdown.....	12
3.4 Temporarily Stopping and Restarting CICS OTTO	12
CHAPTER 4: CONSIDERATIONS FOR TUNING AND RUNTIME.....	13
4.1 CPU Time	13
4.2 Optimization Ratio.....	13
4.2.1 Optimization Level.....	13
4.2.2 Image Pool Size	14
4.2.3 Start Option.....	14

4.2.4 Exclusions.....	14
4.2.5 User Exit	14
4.2.6 Various Settings	15
4.3 Runtime Considerations	16
4.3.1 VSAM Files	16
4.3.2 Trace File	17
4.3.3 Statistics File	18
CHAPTER 5: USING THE DIALOG	21
5.1 Accessing the Online Dialog	21
5.2 The System Command File.....	21
5.3 Using the Menus and Panels	21
5.3.1 Selecting an Option.....	22
5.3.2 Using Commands	22
5.3.3 Using Generic Notation	23
5.4 START Panel.....	26
5.5 Using the Primary Option Menu	27
5.6 General Panel Layout	29
CHAPTER 6: SYSTEM OPTIONS.....	31
CHAPTER 7: STARTING AND STOPPING OPTIMIZATION.....	35
CHAPTER 8: DISPLAY AND CONTROL IMAGE POOL SIZE	37
8.1 FAQs About the Image Pool.....	39
CHAPTER 9: COMPONENT BASED OPTIMIZATION CONTROL	41
9.1 3270 Component Based Optimization Control.....	41
9.2 3600/SCS Component Based Optimization Control	44
CHAPTER 10: LU BASED OPTIMIZATION CONTROL.....	47
10.1 LU Based Optimization Control Menu.....	47
10.2 Displaying LU Selection Lists	49
10.3 LU Based Optimization - 3270 Terminals/Printers	51
10.4 LU Based Optimization - 3600 Terminals.....	52
10.5 LU Based Optimization - SCS Printers	53
10.6 LU Based Optimization - LU Not Active.....	54
CHAPTER 11: MODULE BASED OPTIMIZATION CONTROL	55
11.1 Module Based Optimization Control Menu	56
11.2 Display Module Selection List	57
11.3 Module Based Optimization	59
CHAPTER 12: OPTIMIZATION EXCLUSION AND SELECTION	61
12.1 Excluding LUs	61
12.2 Excluding Modules.....	63

12.3 Selective LU Inclusion	64
CHAPTER 13: TRACE CONTROL	67
13.1 Using the TRACE CONTROL Panel	67
13.2 Viewing Instorage Traces Online	73
13.2.1 Viewing Data Stream Errors.....	74
13.2.2 Viewing All Traced Data Streams	76
13.2.3 Viewing Data Stream Buffer.....	78
13.2.4 Data Stream Error Codes	80
CHAPTER 14: OPTIMIZATION STATISTICS	85
14.1 Types of Optimization Statistics	85
14.1.1 Overall Statistics.....	85
14.1.2 Component Based Statistics	85
14.1.3 LU Based Statistics.....	85
14.1.4 Module Based Statistics.....	86
14.2 Error Statistics.....	86
14.3 Statistics Control	87
14.3.1 Excluding Modules from Statistics.....	90
14.3.2 Selecting Modules for Statistics	91
14.3.3 Controlling Module Statistics Size	92
14.4 Displaying Statistics.....	94
14.4.1 LU Statistics Summary	96
14.4.2 Component Statistics.....	97
14.4.3 Statistics of a Specific LU	99
14.4.4 Module Statistics	100
14.4.5 Error Statistics.....	101
CHAPTER 15: COMPATIBILITY MODE.....	103
CHAPTER 16: BATCH UTILITIES	105
16.1 ABLMAIN Print Utility.....	105
16.1.1 Control Statement Overview.....	105
16.1.2 Utility Output	107
16.2 Batch Command Utility	108
16.2.1 Required JCL	108
16.2.2 Control Statements	108
16.3 Conversion Utility.....	109
APPENDIX A: TROUBLESHOOTING.....	111
A.1 Invalid Optimization.....	111
A.2 Trace Control Using DD OTTOTRCS.....	111
A.3 System Abends.....	112

x37 Abends.....	112
APPENDIX B: USER EXIT SUPPORT.....	113
B.1 Exit Linkage Conventions	113
B.2 Exit Control Block Layout	114
B.3 Exit Coding Considerations	115
APPENDIX C: MASS PROCESSING OF COMMANDS (ABLPCMD).....	117
C.1 Calling ABLPCMD.....	117
C.2 Defining ABLPCMD to CICS	119
APPENDIX D: INTERPRETING MESSAGE TRACE DD OUTPUT.....	121
APPENDIX E: SABLLOAD – ALIAS LIST.....	129
APPENDIX G: TECHNICAL SUPPORT CHECKLIST.....	131
APPENDIX F: NOTICES	133
INDEX.....	137

FIGURES LIST

FIGURE 1: OPTIMIZATION STRUCTURE.....	2
FIGURE 2: START PANEL (OTTOM00).....	26
FIGURE 3: PRIMARY OPTION MENU (OTTOM01).....	27
FIGURE 4: PANEL LAYOUT	29
FIGURE 5: SYSTEM OPTIONS PANEL (OTTOM16).....	31
FIGURE 6: START/STOP PANEL (OTTOM02)	35
FIGURE 7: IMAGE POOL PANEL (OTTOM04).....	37
FIGURE 8: 3270 OPT. CONTROL PANEL (OTTOM05)	41
FIGURE 9: 3600/SCS OPT. CONTROL PANEL (OTTOM06).....	44
FIGURE 10: LU BASED OPT. CONTROL PANEL (OTTOM07).....	47
FIGURE 11: LU LIST PANEL (OTTOM08).....	49
FIGURE 12: 3270 LU OPT. CONTROL PANEL (OTTOM10).....	51
FIGURE 13: 3600 LU OPT. CONTROL PANEL (OTTOM11).....	52
FIGURE 14: SCS LU OPT. CONTROL PANEL (OTTOM12).....	53
FIGURE 15: MODULE OPT. CONTROL PANEL (OTTOM13)	54
FIGURE 16: MOD. BASED OPT. CONTROL PANEL (OTTOM09)	56
FIGURE 17: MOD. LIST PANEL (OTTOM08)	57
FIGURE 18: MODULE OPT. CONTROL PANEL (OTTOM13)	59
FIGURE 19: EXCL. LUS FROM OPT. PANEL (OTTOM14).....	61
FIGURE 20: MOD. EXCLUSIONS PANEL (OTTOM14).....	63
FIGURE 21: SELECT LUS FOR OPT. PANEL (OTTOM14).....	64
FIGURE 22: TRACE CONTROL PANEL (OTTOM15).....	67
FIGURE 23: DIAGNOSTICS OVERVIEW PANEL (OTTOM23).....	73
FIGURE 24: DATA STREAM ERRORS PANEL (OTTOM24)	74
FIGURE 25: TRACE ENTRIES PANEL (OTTOM24).....	76
FIGURE 26: DATA STREAM DISPLAY PANEL (OTTOM25).....	78
FIGURE 27: STATISTICS CONTROL PANEL (OTTOM17)	87
FIGURE 28: EXCL. MODS FROM STATISTICS PANEL (OTTOM14).....	90
FIGURE 29: SEL. MODS FOR STATISTICS PANEL (OTTOM14).....	91
FIGURE 30: MODULE STATISTICS SIZE PANEL (OTTOM18)	92
FIGURE 31: DISPLAY STATISTICS MENU (OTTOM19)	94
FIGURE 32: LU STATISTICS SUMMARY PANEL (OTTOM20)	96

FIGURE 33: COMPONENT STATISTICS PANEL (OTTOM21)	97
FIGURE 34: LU STATISTICS PANEL (OTTOM21).....	99
FIGURE 35: MODULE STATISTICS PANEL (OTTOM21)	100
FIGURE 36: ERROR STATISTICS PANEL (OTTOM26).....	101
FIGURE 37: EXIT CONTROL BLOCK LAYOUT	114
FIGURE 38: MESSAGE TRACE OUTPUT SAMPLE	121

TABLES LIST

TABLE 1: WILDCARD MATCHING RULES AND EXAMPLES FOR GENERIC NOTATION.....	24
TABLE 2: OUTBOUND DATA STREAM ERRORS (INSTORAGE TRACE)	80
TABLE 3: INBOUND DATA STREAM ERRORS (INSTORAGE TRACE)	82
TABLE 4: ABLMAIN PRINT UTILITY COMMAND	106
TABLE 5: ABLPCMD RETURN CODES	118
TABLE 6: MESSAGE TRACE RETURN CODES AND DESCRIPTIONS.....	121

This page left intentionally blank.

PREFACE

CICS® Online Transmission Time Optimizer (CICS OTTO) is a tool for the IBM® Customer Information Control System (CICS). CICS OTTO improves user productivity and 3270 network utilization.

Who Should Use This Book

CICS Online Transmission Time Optimizer User's Guide is intended for use by the system programmer responsible for the operation of CICS. It explains how to control CICS OTTO's operation using CICS panels.

How to Use This Book

This *CICS Online Transmission Time Optimizer User's Guide* contains the following chapters.

- "Chapter 1: Optimization Features" on page 1 describes the features of CICS OTTO and explains how to control them.
- "Chapter 2: Installing CICS OTTO" on page 9 details the steps are required to complete installation after the product has been SMPE received, applied, and accepted. This information is for the attention of the installing system programmer.
- "Chapter 3: Operating CICS OTTO" on page 11 describes how the optimization operates under CICS.
- "Chapter 4: Considerations for Tuning and Runtime" on page 13 describes how to achieve maximum optimization effects and minimum CPU overhead. Additionally, it contains runtime considerations for the VSAM KSDS files that are required for CICS OTTO operation and the sequential files used for the trace and enhanced statistics facilities.
- "Chapter 5: Using the Dialog" on page 21 provides general information on how to access and use CICS OTTO's CICS menus and panels.
- "Chapter 6: System Options" on page 31 explains how to define CICS OTTO's system options.
- "Chapter 7: Starting and Stopping Optimization" on page 35 explains how to start and stop the optimization.
- "Chapter 8: Display and Control Image Pool Size" on page 37 explains how to control the image pool using CICS panels and provides frequently asked questions.
- "Chapter 9: Component Based Optimization Control" on page 41 explains how to set the optimization features for components.

- "Chapter 10: LU Based Optimization Control" on page 47 describes how to set the optimization features for LUs.
- "Chapter 11: Module Based Optimization Control" on page 55 describes how to set the optimization features for modules.
- "Chapter 12: Optimization Exclusion and Selection" on page 61 shows how to exclude terminals/modules from optimization when CICS OTTO is fully started and how to select LUs for inclusion when optimization is selectively started.
- "Chapter 13: Trace Control" on page 67 describes how to use CICS OTTO's trace feature to perform message tracing and instorage tracing of inbound and outbound data streams.
- "Chapter 14: Optimization Statistics" on page 85 describes how to control and display CICS OTTO's statistics.
- "Chapter 15: Compatibility Mode" on page 103 shows how to access the Compatibility Mode. The Compatibility Mode allows you to control CICS OTTO's optimization features using the tool's native command language.
- "Chapter 16: Batch Utilities" on page 105 explains the batch utilities that can be used to apply maintenance, print all optimization options, set options in batch, and copy existing options to the control file of a new release.
- "Appendix A: Troubleshooting" on page 111 provides hints to resolving problems and describes what information should be provided for technical support in case of difficulties.
- "Appendix B: User Exit Support" on page 113 explains how to implement a user-written exit routine.
- "Appendix C: Mass Processing of Commands (ABLPCMD)" on page 117 describes a program that allows you to perform processing of a large number of CICS OTTO commands. This might be useful to facilitate mass updates to the CICS OTTO command file, e.g., to temporarily or permanently exclude a large number of terminals that have suddenly caused a problem.
- "Appendix D: Interpreting Message Trace DD Output" on page 121 describes the trace output that results when a SYSOUT message trace is used. Also described are the return codes associated with such traces.
- "Appendix E: SABLLOAD – Alias List" on page 129 provides the alias names used within the CICS OTTO modules and documentation.
- "Appendix G: Technical Support Checklist" on page 131 should be considered in the event you require technical support.
- "Appendix F: Notices" on page 117 contains IBM legal notices and trademarks.
- The comprehensive "Index" on page 137 allows you to access specific information quickly.

Contacting IBM support

Information on IBM support policy can be found on the Web site. Follow the Support link in the left-hand column at ibm.com/software/ts/cics/.

How to Send Your Comments

IBM welcomes your comments. You can send your comments by any one of the following methods:

1. Electronically to this address:

`idrcf@hursley.ibm.com`

Be sure to include your network address if you want a reply.

2. By FAX, to the following numbers:

UK: 01962-842327

Other countries: +44-1962-842327

3. By mail to the following address:

User Technologies
Mail Point 095
IBM United Kingdom Laboratories
Hursley Park
Winchester
Hampshire
SO21 2JN
United Kingdom

Where to Get More Information

For more general information and technical information, the following books complete the library of CICS OTTO:

- *Program Directory* explains how to install CICS OTTO.
- *CICS Online Transmission Time Optimizer Compatibility Mode Guide* explains how to control optimization using native commands as an alternative to using the CICS panels.
- *CICS Online Transmission Time Optimizer Message Guide* provides an explanation for the messages that may be issued and explains any action that may be necessary.

What's New in Release 1.2

The following enhancements are included in CICS OTTO release 1.2:

- Statistics are collected for inbound and outbound data stream errors. These statistics show the number of data streams in which an error was detected, as well as information on the terminal for which the error most recently occurred. Such information includes date, time, LU/module name, partition ID and size, along with the displacement of the error in data stream, and failing 3270 order or data. A short description of the error code is also shown.
- Inbound and outbound data streams can be traced using an CICS OTTO storage area in which the trace records are stored. This so-called instorage trace enables you to track and evaluate specific inbound and outbound data stream errors. The online Trace Control option provides the controls to start, stop, and display this instorage trace. The instorage trace is provided as an alternative to the tracing that is written to SYSOUT.
- Online help and field level help is presented when PF1 is pressed on any product panel.
- **Changes for Version 1 Release 2, PTF PK53254**
EMULATED 3270 MODEL 2 STARTS WITH INVALID AID X'27' WHICH IS AN ASCII SINGLE QUOTE INSTEAD OF SINGLE QUOTE EBCDIC X'7D'

ERROR DESCRIPTION: A bank cash terminal is defined as a 3270 model 2 VTAM terminal but the input data stream starts with X'27' which is an invalid AID for "normal" 3270 terminals, but when converted to EBCDIC it is x'7D' which is the 3270 AID for an ENTER key. The input data stream is mixed ASCII and EBCDIC with the 3270 control commands being in ASCII and the user data in EBCDIC.

LOCAL FIX:

The fix allows for ASCII control data being present in input messages. Output messages for the cash-terminal are optimized in the normal way. The fix does not affect terminals sending/receiving only EBCDIC data, and so it can be safely installed at other customer sites.

- **Changes for Version 1 Release 2, PTF PK59540**
TO ALLOW COMPRESSION TO BE STOPPED FOR PRINTERS OR TERMINALS INDEPENDENTLY
This PTF gives the ability to START/STOP optimization for 3270 screens and printers independently. Default optimization options will still be common for both.
- **Changes for Version 1 Release 2, PTF PM41414**
CHANGE ABLBAT COMMANDS DEFAULT TO PERMANENT
The default option for commands executed in batch mode is changed from T to P. A default option of P will now be assumed.
- **Changes for Version 1 Release 2, PTF PK89259**
TO ENABLE CICS/OTTO TO RUN WITH CICS/TS V410
This PTF ships minor compatibility changes to CICS/OTTO to allow it to function with release 4.1 of CICS Transaction Server.

- **Changes for Version 1 Release 2, PTF PM41468**
TO ENABLE CICS/OTTO TO RUN WITH CICS/TS V420

This PTF ships minor compatibility changes to CICS/OTTO to allow it to function with release 4.2 of CICS Transaction Server.

CHAPTER 1: OPTIMIZATION FEATURES

This chapter provides an overview of the features offered by the CICS Online Transmission Time Optimizer (CICS OTTO):

- Techniques used for optimization.
- Controls that you may consider using for optimization.

All these features are applicable to the following three component types:

1. 3270 terminals and printers.
2. SCS printers.
3. 3600/4700 banking terminals.

General control of the CICS OTTO features is handled using the CICS OTTO online dialog, which is detailed in subsequent chapters. The *CICS Online Transmission Time Optimizer Compatibility Mode Guide* explains how to use the product's native command language as an alternative to using the online dialog.

1.1 Controlling Optimization

The optimization features of CICS OTTO are controlled based on two different types of start modes:

- Fully started indicates that **all** logical units (LUs) and modules are included in optimization **except** for those which are specifically excluded either because of active LU or module exclusions.
- Selectively started indicates that only those messages that are destined for terminals and/or printers specifically defined in the CICS OTTO selection list are optimized.

The minimum definitions required are those that define which optimization features should apply to the components. This is called Component Based Optimization. You can go further by defining optimization features that are LU specific and module specific.

LU Based definitions take priority over the Component Based definitions. Module¹⁾ Based definitions take priority over both LU and Component Based definitions. This structure provides that most of your optimization needs can be handled at the component level.

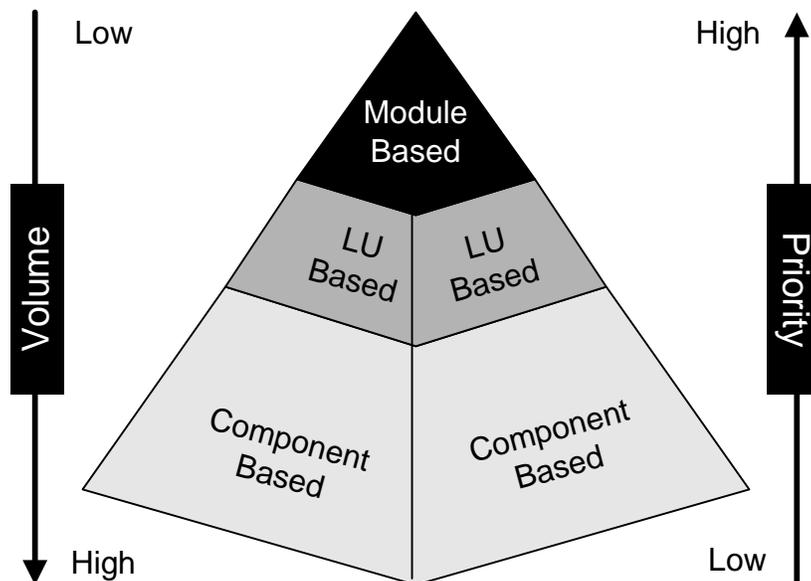


Figure 1: Optimization Structure

¹⁾ Refer to the "Transaction ID" option on the SYSTEM OPTIONS panel.

1.1.1 Component Based Optimization Control

The optimization level as well as other processing-relevant information for a given message are defaulted to the component values. The following options may be set for the 3270 component:

- Imaging
- Optimization
- Image Compression
- Clear TIOA
- Lightpen
- WCC-Ignore
- Base Color Switch
- Printer Linesize
- 3192
- Zero MF order allowed
- Blank elimination
- Field merge

1.1.2 LU Based Optimization Control

One or more component defaults may be overwritten by specific terminal settings, called LU settings. All options as described for the component may be set for one or more LUs. LU settings have a higher priority than the component values.

1.1.3 Module Based Optimization Control

The following options may be set for specific modules:

Imaging	Optimization
Clear TIOA	Lightpen
WCC-Ignore	Opt. as SCS/3270
Prime compr. char.	Printer linesize
Blank elimination	Field merge

If one of the above options is set for a specific module and differs from the component value, any current LU-specific settings for these options are ignored for messages sent by the specific module destined for the specific LU. All other options that can be set for the component or LU—but **not** for a module—are taken from any current LU settings, or lastly from the component settings.

For example, assume the following controls are issued:

```
SET OPTIMIZATION OUT IMAGE ALL PERM
SET FMERGE ON MOD=pgm PERM
SET WCC-IGNORE ON MOD=pgm PERM
```

As a result, the following highlighted settings are active for the component, the LU, and module:

	Component Value	LU Value	Module Value	Resulting Value
Imaging	ON	ON	ON	ON
Clear Tioa	OFF	OFF	OFF	OFF
Lightpen	OFF	OFF	OFF	OFF
WCC-Ignore	OFF	OFF	ON	ON

If a message is sent by the module¹⁾ *pgm* to the LU *name* the module settings for the above options are assumed. All options that are not explicitly set for a module are defaulted from the LU value (if it exists) or from the component.

¹⁾ Refer to the "Transaction ID" option on the SYSTEM OPTIONS panel.

1.2 3270 Optimization Techniques

The 3270 component is divided into terminals and printers, referred to as logical units (LUs). Generally, optimization is done according to the 3270 data stream conventions using the intelligence of connected cluster controllers and/or terminals. This is done by the following basic optimization techniques:

- Replacing repeating characters by an RA-order (**R**epeat to **A**ddress).
- Sorting the data stream by buffer addresses.

These techniques are used for terminals as well as for printers with a defined line length in the WCC (**W**rite **C**ontrol **C**haracter). For printers without defined line length, blanks followed by a NL (**N**ew **L**ine) order are eliminated. Additionally, spaces at the end of the line (without NL) are optimized. You can also handle such data streams as if the line length were defined using the WCC-IGNORE option.

In addition to these basic optimization techniques, CICS OTTO provides Imaging, Field Merge, and Blank Elimination features for 3270 terminals. The following sections describe these features in more detail.

1.2.1 Imaging

Imaging is provided for 3270 terminals. Imaging is an optimization technique that keeps a copy of a screen in main storage and transmits only changed data. CICS OTTO uses an image pool to do this. Imaging starts with the first outbound message that is written by the application with an ERASE/WRITE command. All of the subsequent messages destined for the terminal are compared with the existing data in the screen image and only changed data and attributes are transmitted after the optimization process. Simultaneously, the screen image is updated with the new data and attributes.

The Imaging technique leads to a high optimization ratio if terminal operators are using applications that always send the same screen, or at least the same headings and constants. If you use Imaging, the following additional optimization techniques may be used.

1.2.2 Field Merge Optimization

Field Merge means that the transmission of specific attributes of protected fields is omitted after the optimization process, if:

- The protected field is invisible. In this case, also the data is not transmitted.
- The protected field is preceded by another protected field with exactly the same attribute.

CICS OTTO has full control over the merged fields. They may be changed in a subsequent outbound message. Also, a READ BUFFER is serviced as if these attributes were really on the screen.

Field Merge optimization may be used only if Imaging is used.

1.2.3 Blank Elimination

Blank Elimination means that all blanks in protected fields are changed to hexadecimal nulls. The advantage of this technique is mainly in conjunction with an ERASE/WRITE command. With an ERASE/WRITE command, not all referenced screen positions are filled with hex nulls. Therefore, replacing blanks with zeros represents a significant savings potential. Additionally, this technique leads to good optimization results when there are frequent screen exchanges.

CICS OTTO has full control over the eliminated blanks. The field contents may be changed in a subsequent outbound message and a READ BUFFER is serviced as if the blanks were really on the screen.

Blank Elimination may be used only if Imaging is used.

1.3 SCS Optimization Techniques

The only way to optimize SCS printer data streams is to replace blanks by tabulator positions. Instead of multiple blanks, only a PT-order (**P**rogram **T**ab) is transmitted after the optimization process. Additionally, one or more SHF-orders (**S**et **H**orizontal **F**ormat) are generated to determine the tabulator positions.

CICS OTTO provides the ability to use the 3270 printer optimization techniques for printers that are defined as SCS printers to the TP system and connected to a 3174-type cluster controller.

1.4 3600/4700 Optimization Techniques

CICS OTTO provides pure SCB data compression (String Control Bytes) for both outbound and inbound directions. This technique distinguishes three categories of characters:

- Prime character.
- Repeating characters.
- Normal text.

The prime character is the most frequently used character in the data streams sent to the banking terminals (usually blank or hexadecimal null). After the optimization process, only one byte is transmitted instead of a series of prime characters. For repeating characters, two bytes are transmitted and for normal text the number of bytes of the text plus one count byte are transmitted. Good optimization results are achieved if the data streams contain a lot of prime characters and/or repeating characters.

Module ABLNSNA performs SCB compression/decompression. ABLNSNA is responsible for the pure SCB data compression as described in the IBM manual, *SNA Sessions Between Logical Units* (GC20-1868), Part 2 Chapter 5. However, the FMH handling is dependent on the TP system. This special handling (such as setting the compression bit in the appropriate FMH) is performed by an interface module, ABLNSNAI. A sample source member is distributed as ABLNSNAI. Within this source member, all actions to be performed are described in detail.

The decompression/compression mechanism on the 3600/4700 side is not part of the package, it is a user responsibility.

The 3600/4700 Optimization may be started only for TP-System outbound messages (SET OPT OUT 3600) or for both directions (SET OPT FULL 3600).

1.5 Optimization Tracing Options

Traces can be produced before and after each optimization for LUs and modules. There are two tracing techniques that can be used:

1. Message traces for inbound and outbound data streams can be written to an output file identified by DDNAME OTTOTRCS.
2. Instorage traces use a CICS OTTO storage area in which the trace records are saved for viewing via the Display Instorage Trace option of the TRACE CONTROL panel.

This page intentionally left blank.

CHAPTER 2: INSTALLING CICS OTTO

This chapter indicates what steps are required to complete installation after the product has been SMP/E received, applied, and accepted. This information is for the attention of the installing system programmer.

2.1 Job Descriptions

All sample jobs are contained in members that you will find in the AABLINST data set. This section describes the purpose of each of the sample jobs.

If you are installing this product into its own SMP/E environment, the first job will define it:

- ABLSMPSU - is to ALLOCATE and INITIALIZE the SMP/E environment.

The remaining jobs are required for all installations:

- ABLALLOC - allocates the TARGET and DISTRIBUTION libraries.
- ABLDDDEF - performs the SMP/E ADD DDDEFs.
- ABLRECV - performs the SMP/E RECEIVE stage.
- ABLAPPLY - performs the SMP/E APPLY stage.
- ABLACCPT - performs the SMP/E ACCEPT stage, and completes the SMP/E part of the installation.

The following sample jobs are also required to be run:

- ABLVSAMJ - to create the required application VSAM data sets.
- ABLASML - to assemble and linkedit the exits.
- ABLBATC - to setup the application command file. The defaults can be changed and are listed in this User's Guide.
- ABLCASM - to assemble and linkedit the application programs.

An optional sample job:

- ABLOCSD - is provided to enable the definitions of the maps, etc. to be installed via DFHCSDUP.

2.2 System Changes

The following changes will also need to be made to your system:

DFHPLPTI requires the following entry:

- DFHPLT TYPE=ENTRY , PROGRAM=DFHDELIM
- DFHPLT TYPE=ENTRY , PROGRAM=ABLSTRT

Note: ABLSTART must be coded after DFHDELIM, and DFHDELIM must be explicitly defined.

DFHPLTSD requires the following entry:

- DFHPLT TYPE=ENTRY , PROGRAM=DFHDELIM
- DFHPLT TYPE=ENTRY , PROGRAM=ABLSTOP

They should then be added to the SIT.

The following DD statements should be specified in the CICS startup JCL. The first three are mandatory, however if the statistics file (OTTOSTAT) is not defined, the module statistics will not be gathered at CICS shutdown.

```
//OTTOCMD  DD DSN=<hlq>.SABLCCMD,DISP=SHR      (command file)
//OTTOMOD  DD DSN=<hlq>.SABLCMOD,DISP=SHR      (module file)
//OTTOTRCS DD SYSOUT=*                          (trace file)
//OTTOSTAT DD SYSOUT=*                          (statistics file)
```

In addition the CICS OTTO load library <HLQ>.SABLLOAD must be concatenated to the DFHRPL DD statement.

Your installation should now be complete.

CHAPTER 3: OPERATING CICS OTTO

The optimization features described in the first chapter can be controlled in either of the following two ways:

1. Using the CICS dialog panels. The majority of all functions can be performed using these interactive and self-explanatory panels without the need to know or understand CICS OTTO's native command language. In subsequent chapters of this book, explanations needed for using these panels are provided.
2. Using the Compatibility Mode. Compatibility Mode under CICS allows you to use CICS OTTO's native command language. The main functions of the native commands are compatible to those that can be made using the CICS dialog panels. Accessing the Compatibility Mode from the CICS panels is detailed on page 103. The actual use of the native commands required in this mode are detailed in the *CICS Online Transmission Time Optimizer Compatibility Mode Guide*.

3.1 CICS Startup

CICS OTTO is automatically initiated using the PLT-phase ABLSTRT at CICS startup time. ABLSTRT enables the CICS input and output exits and initializes CICS OTTO by calling the interface module OTTOEXIT. All other routines are loaded from the VSAM control file OTTOMOD into the private area of the CICS region above the 16 MB line. All other required storage such as work areas, control blocks and the image pool is also acquired from above the 16 MB line.

3.2 CICS Normal Operation

CICS OTTO gets control of all input and output messages using standard CICS exits:

XTCOUT and XTCIN in case of BTAM

XZCOUT, XZCOUT1 and XZCIN in case of VTAM

If your installation is already using one or more of these exits, the order in which they should be enabled depends on the logic they perform. Generally, CICS OTTO should be the first one to get control of all messages, i.e. it should be the first one to be enabled. However, contact IBM Support if you want to use more than one program for the above exits.

3270, SCS and 3600/4700 type messages are optimized depending on the various start and control options. Additionally the user exit may influence the optimization.

3.3 CICS Shutdown

Optimization statistics are automatically written to the console or, if DD statement OTTOSTAT is present, to the statistics file at CICS shutdown time. This is initiated using the PLT program ABLSTOP.

☞ **Note:** Statistics are only written if a SHUT,NO is issued.

3.4 Temporarily Stopping and Restarting CICS OTTO

Two programs are delivered that you can use to temporarily stop and restart CICS OTTO processing without the need to recycle the CICS system; ABLTSTP and ABLTSTA, respectively.

To do so, add the following PPT/PCT definitions to your CICS system or enter corresponding definitions via CEDA :

```
DFHPPT TYPE=ENTRY, PROGRAM=OTTOTSTA, PGMLANG=ASSEMBLER
DFHPPT TYPE=ENTRY, PROGRAM=OTTOTSTP, PGMLANG=ASSEMBLER
DFHPCT TYPE=ENTRY, PROGRAM=OTTOTSTA, TRANSID=OSTA
DFHPCT TYPE=ENTRY, PROGRAM=OTTOTSTP, TRANSID=OSTO
```

The following transactions support this operation:

- Transaction OSTO stops CICS OTTO processing and disables the exit program OTTOEXIT.
- Transaction OSTA restarts CICS OTTO processing. Restarting CICS OTTO works like CICS OTTO initialization at CICS startup, i.e., the permanent CICS OTTO settings are read from the CMD file and the CICS OTTO optimization routines are read from the MOD file.

CHAPTER 4: CONSIDERATIONS FOR TUNING AND RUNTIME

This chapter contains tuning considerations that will assist you in making efficient use of your resources and achieving the best possible optimization results.

4.1 CPU Time

CICS OTTO needs some CPU time for the optimization of the messages. If Imaging is active and you want to decrease the CPU overhead, switch off the image compression. Without image compression, a higher value must be set for the total image pool size to make sure that all images can be saved in main storage. Therefore, you have to decide whether to use CPU time or main storage.

Generally, the CPU time depends on the optimization features in use. Less CPU time is used if Imaging is switched off -- but at the cost of the optimization effect.

Module based statistics also cause CPU overhead. Therefore, these statistics should be switched off whenever possible.

4.2 Optimization Ratio

The optimization ratio depends on:

- The optimization level used.
- The image pool size.
- How optimization is started (FULL or SELECTIVE).
- Which exclusions are active.
- User exits and various settings as described below.

4.2.1 Optimization Level

The highest optimization level should be selected to get maximum optimization results; meaning that Imaging should be switched on.

4.2.2 Image Pool Size

The image pool statistics provide information about the usage of the image pool. They are only relevant if the Imaging feature is used (this is the case when the optimization level **OUT IMAGE** is used). The image pool should be large enough to save the screen image of all terminals connected to the TP system. The SHORTAGE DELETIONS value in the image pool statistics will show if the total pool size should be increased. This value should be zero, or very low, to ensure best optimization effect. These statistics are important for the tuning of CICS OTTO and should be reviewed thoroughly

1. during the first weeks following the implementation of CICS OTTO and
2. after adding terminals to the TP system.

More details regarding the image pool can be found in section "8.1 FAQs About the Image Pool" on page 39.

4.2.3 Start Option

CICS OTTO has two start options; FULLY started or SELECTIVELY started. Fully started means that **all** LUs and modules are optimized **except** those which are excluded either because of active LU or module exclusions. Selectively started means that messages are optimized only if they are destined for terminals or printers in the selection list.

If CICS OTTO is selectively started, the optimization result is lower than if it is fully started. However, if only some remote terminals are to be optimized, the selective start option should be used.

4.2.4 Exclusions

The number of excluded terminals and modules influences the optimization ratio. However, the required module and terminal exclusions as described in the installation must be defined to ensure CICS OTTO functionality.

4.2.5 User Exit

When using a CICS OTTO user exit program, carefully check the return code passed to CICS OTTO because this return code has the highest priority regarding the optimization level used.

4.2.6 Various Settings

Optimization results depend on various settings. This section includes some tuning considerations regarding the types of settings that can be used.

4.2.6.1 Set *BCS*

If there are no terminals in your installation with the BASE COLOR SWITCH set, switch this feature off to get better optimization results. If there are only some terminals with the base color switch on, it is recommended to set this feature on explicitly for these terminals rather than to set the component value.

4.2.6.2 Set *LIGHTPEN*

If there are no terminals in your installation that can work with a light pen, switch this feature off to get better optimization results. If there are only some terminals with light pens, it is recommended to set this feature on explicitly for these terminals rather than to set the component value on.

4.2.6.3 Set *ZERO-MF-ALLOWED*

If all terminals in your installation support an MF-order with zero number of pairs, switch this feature on to get better optimization results. If there are only some terminals that do not support this kind of order, it is recommended to set this feature off explicitly for these terminals rather than to set the component value off.

4.2.6.4 Set *3192*

If there are no 3179 or 3192 terminals in your installation, switch this feature off to get better optimization results. If there are only some terminals of these types, it is recommended to set this feature on explicitly for these terminals rather than to set the component value on.

4.2.6.5 SET *SCS*

If there are LU-type 1 printers in your environment that are connected to a 3174 type cluster controller, these printers can be optimized like an LU-type 3 printer. This will increase the printer optimization ratio.

4.2.6.6 Set *TERMNO*

TERMNO is the initialization value for the number of terminals. At startup time, CICS OTTO acquires all (internal) lists for exactly this number of terminals. Each time a list is filled up, the list is increased by the TP system's GETMAIN/FREEMAIN. Because the main storage is fragmented, this number should be set in a production environment.

```
>>— SET TERMNO=nnn — 3270 —————><
                        | 3600 |
                        |  SCS |
```

The *DISPLAY OPTIONS* command will show you the number of control blocks in use. Take this value to set your start up number.

```
>>— DISPLAY OPTIONS — SYSTEM —————><
                        | 3270 |
                        |  SCS |
                        | 3600 |
                        | LU=tid* |
                        | MOD=pgm* |
```

4.3 Runtime Considerations

Two VSAM KSDS files are required for CICS OTTO operation and optionally two sequential files for the trace and enhanced statistics facilities. This section contains some runtime considerations in regard to these files.

4.3.1 VSAM Files

There are two VSAM files:

- The VSAM control file OTTOMOD is used to load CICS OTTO code at startup time and to keep track of any maintenance. This file might overflow while maintenance is applied.
- The VSAM command file OTTOCMD is used to maintain all permanent settings defined by the user. This file might overflow if a permanent command tries to add a new record.

In the event one of these files overflows, before the next startup you should:

1. Run a REPRO against the file.
2. DELETE and DEFINE the file again with a higher RECORDS specification.
3. Run the REPRO back into the new file.

To increase these VSAM files, you can use the sample JCL member ABLVSAMJ.

4.3.2 Trace File

A trace file is provided to track down message problems and output them to a SYSOUT DD statement called OTTOTRCS. Alternatively, an instorage trace is also offered that presents the trace records online.

This section refers only to the message trace that uses the output trace file. For details on how to start and stop all traces, see "Chapter 13: Trace Control" on page 67.

If the internal or non-internal trace option is chosen, the trace file will be opened when a trace is started and it will be closed when the trace is stopped. Such traces can only be started if the OTTOTRCS DD statement exists. It is highly recommended to add this DD statement into the TP system startup deck. If the trace is on, CICS OTTO will trace all inbound and outbound data streams before optimization, as well as all outbound and inbound messages after optimization. Trace data is in a printable format according to the trace specification. Dynamic allocation is not performed for the trace file. You may therefore allocate it to disk which allows you to print the trace information using IEBGENER while the TP system is still up.

The trace information is written with the following DCB information:

```
LRECL=133 , BLKSIZE=1330 , RECFM=FBA , BUFNO=15
```

BLKSIZE and BUFNO may be overwritten in the JCL DCB parameter.

You may choose between the following two DD statements for the trace file:

```
1) //OTTOTRCS DD SYSOUT=*
2) //OTTOTRCS DD DSN=prefix.OTTOvmm.TRACE,
// DISP=disp, DCB=(BLKSIZE=nnn, BUFNO=mmm)
```

where:

prefix = Site specific high level qualifier
vmm = CICS OTTO version and release number
disp = OLD, SHR, MOD
nnn = Number of blocks
mmm = Number of buffers

☞ **Note:** If the trace file is allocated to a disk, it must be printed after the trace is stopped and before a new trace is started in case of DISP=SHR or DISP=OLD. Otherwise, the trace previously written will be lost.

In the event of a B37 abend on the trace file, it can be handled automatically. During the installation process, parameter WRAP on the ABLGEN macro decides whether the trace output should be halted in a B37 condition or if it should be wrapped around. Wrapping simply means that the trace file will be overwritten starting from the top.

☞ **Note:** Do not use DISP=MOD with the WRAP AROUND installation option. This avoids D37 abends which cannot be handled.

4.3.3 Statistics File

The purpose of the statistics file is to save statistical information. This file is opened and closed during the TP system shutdown or whenever a request for statistics is made. The file may be allocated to disk which allows you to print the statistics information written using IEBGENER while the TP system is still up.

For details on creating, viewing, and printing statistics, see "Chapter 14: Optimization Statistics" on page 85. Module statistics are only available if the DD statement for the statistics file is present. Otherwise, only the component and pool statistics are written to the console.

The statistical information is written with the following DCB information:

```
LRECL=133 , BLKSIZE=1330 , RECFM=FBA , BUFNO=15
```

BLKSIZE and BUFNO may be overwritten in the JCL DCB parameter.

The number of records written to the statistics file depends on the number of entries in the module statistics list. This number may be restricted to a pre-defined value using the dialog option for excluding modules from statistics.

The required space (in number of records) for the statistics file can be calculated using the following formula:

$$r = 70 + 2*n + 5*((n+14)/15)$$

where: n is the number of modules for which statistics are saved.

To avoid B37 conditions, the statistics file should be pre-allocated with the following space specification in case of disk allocation:

$$\text{SPACE} = (1330, (r/10))$$

For example, if the number of modules for which statistical information should be saved is 200, the space is calculated as follows:

$$\begin{aligned} r &= 70 + 2*200 + 5*214/15 \\ r &= 544 \\ \text{SPACE} &= (1330, (55)) \end{aligned}$$

In the event of a B37 abend on the trace file, it can be handled automatically. During the installation process, parameter WRAP on the ABLGEN macro decides whether the trace output should be halted in a B37 condition or if it should be wrapped around. Wrapping simply means that CICS OTTO will overwrite the trace file starting from the top.

You may choose between the following two DD statements for the statistics file:

- 1) //OTTOSTAT DD SYSOUT=*
- 2) //OTTOSTAT DD DSN=*prefix*.OTTO*vmmm*.STAT,
// DISP=*disp*,BLKSIZE=*nnn*,BUFNO=*mmm*

where:

prefix = Site specific high level qualifier
vmmm = CICS OTTO version and release number
disp = OLD, SHR, MOD
nnn = Number of blocks
mmm = Number of buffers

Note: If DISP=SHR or DISP=OLD is used, the statistics file should be printed before a new TP system startup. If it is not, the previous statistics information will be lost. DISP=MOD should not be used together with the WRAP AROUND installation option. This avoids D37 abends which cannot be handled.

This page intentionally left blank.

CHAPTER 5: USING THE DIALOG

This chapter is intended to provide the minimally required information that is needed to get you started using the online dialog panels of CICS OTTO. This information includes:

- Operations.
- Access to and general use of the panels.
- Primary options of the PRIMARY OPTION MENU.

5.1 Accessing the Online Dialog

To access the online dialog of CICS OTTO, call the transaction ID. Normally, this ID is **OTTO**. However, this ID is assigned as part of a required PCT entry during installation.

5.2 The System Command File

Using the CICS panels of CICS OTTO, you will notice that most optimization controls can be defined as **CURRENT** or **PERMANENT**. All of your permanent optimization settings are maintained on a command file defined by the DD statement **OTTOCMD**, see section 4.3.1 VSAM Files on page 16. At each TP system startup, the command file optimization settings are activated. However, optimization settings can be changed temporarily.

- Use the **PERMANENT** field to define optimization settings that should be updated to the command file and activated at each system startup.
- Use the **CURRENT** field to define temporary changes to settings that effect only the current processing and that are not updated to the command file. Therefore, the permanent command file definitions are again activated at the next start up.

5.3 Using the Menus and Panels

Each menu and panel is described in detail. Each section begins with a picture of the menu or panel that is being described. If you are reading a section that describes a menu, you will see an explanation of what happens when you select each choice on the menu. If you are reading a section about a panel, you will see a list of the fields on the panel along with an explanation of each field.

5.3.1 Selecting an Option

On each menu, there is a list of options that can be selected and an input field called OPTION. Select an option by typing the corresponding option number into the OPTION field and pressing <ENTER>. If the selected option displays another menu, make a selection directly from the first menu, by entering both option numbers separated by a dot into the OPTION field:

OPTION ==> *number of option.number of sub-option* (e.g., 13.4)

From any panel you can go directly to an option or sub-option of the PRIMARY OPTION MENU by using the OPTION field as follows:

OPTION ==> = *number of option.number of sub-option* (e.g., =12.15 or =6)

For more illustration on using the OPTION field, see the explanation and examples detailed in section 5.5 "Using the Primary Option Menu".

Note: You cannot select all sub-options by typing an option number preceded by an equal sign.

5.3.2 Using Commands

Each menu and panel allows you to use commands that are defined by function keys. The panel specific function keys are defined at the bottom of each panel. The most common function key commands are:

- F1** Displays online help for all panels that support the F1 key. To get field level help, position the cursor to an input field and press F1 to get online information for this field. To get general help for the panel, position the cursor elsewhere and press F1.
- F3** Saves your input and returns to the calling menu. This function key is also used to terminate the OTTO transaction if used on the PRIMARY OPTION MENU.
- F4** Returns to the PRIMARY OPTION MENU.
- F7** Scrolls the panel backward.
- F8** Scrolls the panel forward.
- F9** Routes statistics to print or deletes special LU/module settings.

5.3.3 Using Generic Notation

On many panels you will be asked to enter LU or module names. When entering the name of an LU or module, generic notation is often allowed. Generic notation is a way of grouping LUs or modules with similar names using wildcards.

There are two types of generic notation: simple and extended.

5.3.3.1 Simple Generic Notation

Simple generic notation allows you to use the asterisk (*) as a wildcard to generically name LUs and modules by appending the asterisk to the end of a name, thus masking all names that begin with like characters. For example, generic LU name TE* will mask to all LU names that begin with TE.

5.3.3.2 Extended Generic Notation

Extended generic notation allows you to use the asterisk (*) and percent sign (%) as wildcards anywhere in a string. This applies to every parameter (or input field) for which CICS OTTO supports generic notation.

When using the extended generic notation, follow IBM's conventions for RACF and OPC/ESA when using these two special characters. A percent sign matches any valid (non-blank) character in a name, whereas an asterisk matches any string of zero or more valid characters in a name.

There is one syntax restriction. Two or more consecutive asterisks are not allowed.

Wildcard notation is honored for every online input field and for every keyword (i.e., commands in compatibility mode) for which CICS OTTO supports generic notation.

Special attention must be paid to menu items 5.1 "Specify Optimization Values for Specific LU", and 6.1 "Specify Optimization Values for Specific Module". In compatibility mode, these items correspond to a SET command with keyword LU or MOD.

When a CICS OTTO command of this type is issued, two actions are performed:

1. All active terminals and modules are checked to see if they are matched by the LU/MOD specification. If so, the command is executed for these terminals and modules.
2. An entry is added to an internal CICS OTTO control block called "pending queue". This entry reflects the options set by the SET command.

Actually, there are two pending queues, one for terminals and one for modules. Pending queue entries may be TEMPORARY (in-storage, only), or PERMANENT (written to the CMD file and read into storage during CICS /OTTO initialization).

Every time a terminal or module is optimized by CICS OTTO for the first time, the appropriate pending queue is scanned for an entry whose name matches the terminal, or module name. The logic follows one of the following courses:

- If no entry is found, the terminal/module is optimized using the default settings of the component (3270, SCS, or 3600) to which the terminal/module belongs.
- If there are one or more pending queue entries matching the terminal/module, a set of rules is applied in order to select a pending queue entry whose settings are used for the terminal/module. Exactly one entry is selected and there is no merge of settings of different matching pending queue entries.

The rules are governed by the goal to find the best-matching pending queue entry. In some respects, RACF methods are adopted to find the best-matching profile for a given resource.

Table 1: Wildcard Matching Rules and Examples for Generic Notation

Rule	Description
1	<p>If there is a pending queue entry that exactly matches the name of the terminal/module, this entry is always selected. This would be the case if a SET command had been issued previously with the exact (i.e., non-generic) LU/MOD name.</p> <p>If there is no exact match and there is only one matching generic pending queue entry, this entry will be selected.</p> <p>If there is no exact match and at least two matching generic pending queue entries exist, Rules 2-4 are used to find the best-matching entry.</p> <p>CICS OTTO uses the name "pattern" for a string that contains one or more generic characters (i.e., asterisks and/or percent signs). Thus, the name of a generic pending queue entry is a pattern. Rules 2-4 explain how CICS OTTO compares patterns in order to find the best matching one.</p>
2	<p>Both patterns are compared from left to right. CICS OTTO assumes that no asterisk precedes the first position where they differ. Since both patterns match the terminal/module name, one of the characters at this position must be generic. In this case, a non-generic character wins against a generic character and a percent sign wins against an asterisk.</p> <p><i>Example:</i></p> <p>For the name ABC, pattern ABC* matches better than AB%, AB% matches better than AB*, and AB* matches better than A%C.</p>

3	<p>If Rule 2 does not apply, both patterns must be equal up to, and including, a position where both contain an asterisk. In this case, the pattern with the higher number of "hits" (no. of characters \leq *) wins.</p> <p>If both patterns have the same number of hits, the pattern with the smaller number of asterisks wins.</p> <p><i>Example:</i></p> <p>For the name ABC, Rule 1 does not decide between the matching patterns A*, A*C, A*B*, and A*C*. Rule 3 lets A*C win against each other of these patterns.</p>
Rule 4	<p>If Rules 2 and 3 do not apply, the pattern that is higher in alphabetical order wins. This rule will apply in any case because both patterns are different.</p> <p><i>Example :</i></p> <p>For the name ABC, Rules 2 and 3 do not decide between the matching patterns A*B*, and A*C*. Rule 4 lets A*C* win.</p>

5.4 START Panel

The START panel is the first panel to be displayed after calling the CICS OTTO transaction, usually this transaction name is OTTO.

```

OTTOM00

Online Transmission Time Optimizer
OTTO for CICS V1R2 0602 / 06110

(C) Copyright Software Engineering GmbH, 1987 - 2011
    All rights reserved

OTTOEXIT STARTED

-----
F3=Exit  ENTER=Primary Option Menu
```

Figure 2: START Panel (OTTOM00)

To continue, press the ENTER key to access the PRIMARY OPTION MENU.

5.5 Using the Primary Option Menu

After pressing <ENTER> on the START panel, the PRIMARY OPTION MENU is displayed.

```
PRIMARY OPTION MENU          OTTO for CICS V1R2          OTTOM01

OPTION ====> _____

      1.  START / STOP  OTTO for CICS Optimization
      2.  Display and Control OTTO Image Pool Size
      3.  3270 Component Based Optimization Control
      4.  3600/SCS Component Based Optimization Control
      5.  LU Based Optimization Control
      6.  Module Based Optimization Control
      7.  EXCLUDE LUs from Optimization
      8.  EXCLUDE Modules from Optimization
      9.  SELECT LUs for Optimization
     10.  Trace
     11.  System Options
     12.  Statistics Control
     13.  Display Statistics
     14.  OTTO Commands (Compatibility Mode)
      X.  Exit

-----
F1=Help      F3=Exit
```

Figure 3: PRIMARY OPTION MENU (OTTOM01)

Use the PRIMARY OPTION MENU to access other menus and panels that allow you to control all optimization features, run traces, and manage system statistics.

Using the Panel

1. To go directly to the panel of a primary option from the PRIMARY OPTION MENU, place the cursor in the OPTION field and type one of the following option numbers:

Enter: To do this:

- 1 Start and stop the optimization for each component type, see "Chapter 7: Starting and Stopping Optimization".
- 2 Display image pool statistics and change the image pool size in main storage, see "Chapter 8: Display and Control Image Pool Size" on page 37.
- 3 Set optimization features for all 3270 terminals and printers, see "Chapter 9: Component Based Optimization Control".
- 4 Set optimization features for all 3600 terminals / SCS printers, see "Chapter 9: Component Based Optimization Control".
- 5 Set optimization features for LUs, see "Chapter 10: LU Based Optimization Control".

- 6 Set optimization features for modules, see "Chapter 11: Module Based Optimization Control".
- 7 Exclude LUs from optimization when the start mode is FULL, see "Chapter 12: Optimization Exclusion and Selection".
- 8 Exclude modules from optimization when the start mode is FULL, see "Chapter 12: Optimization Exclusion and Selection".
- 9 Select terminals for optimization when the start mode is SELECTIVE, see "Chapter 12: Optimization Exclusion and Selection".
- 10 Start and stop the trace function, see "Chapter 13: Trace Control".
- 11 Define general system parameters, see "Chapter 6: System Options".
- 12 Manage statistics for modules, see "Chapter 14: Optimization Statistics".
- 13 Display and print statistics, see "Chapter 14: Optimization Statistics".
- 14 Access the Compatibility Mode for the purpose of using native commands to control the optimization features of CICS OTTO. Refer to the *CICS Online Transmission Time Optimizer Compatibility Mode Guide* for details on how to use native commands.
- x Terminate the CICS OTTO transaction (alternatively press <F3>).
Note: To exit the CICS OTTO transaction from any other panel, type =X in the OPTION field.

2. To go directly to a sub-option of another menu from the PRIMARY OPTION MENU, place the cursor in the OPTION field and type: the primary option number, a dot, the sub-option number:

Example: This example selects the sub-option EXCLUDE MODULES FROM STATISTICS, which is option 15 of the STATISTICS CONTROL menu, which is option 12 from PRIMARY OPTION MENU.

- Enter 12.15 into the OPTION field of the PRIMARY OPTION MENU.
- The EXCL. MODS FROM STATISTICS panel is displayed.

3. To bypass the PRIMARY OPTION MENU and make a panel selection from any other panel, place the cursor in the OPTION field and type: an equal sign, the primary option number, a dot, the sub-option number:

Example: This example selects the sub-option EXCLUDE MODULES FROM STATISTICS, which is option 15 of the STATISTICS CONTROL menu, which is option 12 from PRIMARY OPTION MENU.

- Enter =12.15 into the OPTION field on any panel.
- The EXCL. MODS FROM STATISTICS panel is displayed.

5.6 General Panel Layout

All panels have the same general layout, except for the panel that is used for entering native commands called the Compatibility Mode.

L01	Panel Title	OTTO for CICS V1R2	Panel ID
L02			
L03	Message Area		
L04	Input Field for Selection of an Option		
L05		
L06			
L07	.		
L08	.		
L09	.		
L10	.		
L11	.		
L12	.		
L13	.	Work Area	
L14	.		
L15	.		
L16	.		
L17	.		
L18	.		
L19	.		
L20	.		
L21	.		
L22		
L23	-----		
L24	Function Key Area		

Figure 4: Panel Layout

- L01** - Line 1 contains CICS OTTO name, the version/release number V1R2, the panel title, and the panel identification number.
- L02** - Line 2 is always a blank separator line.
- L03** - Line 3 is the message area for online messages. There are two kinds of messages:
 1. General messages (syntax checking, etc.).
 2. Command execution messages.All messages are listed in the *CICS Online Transmission Time Optimizer Message Guide*.
- L04** - Line 4 contains an input field for the selection option.
- L05 to L22**- Lines 5 through 22 are used as work area lines for input and output fields.
- L23** - Line 23 is a dashed separator line.
- L24** - Line 24 is the function key area.

This page intentionally left blank.

CHAPTER 6: SYSTEM OPTIONS

General processing parameters are called system options. Such parameters include date format, exit support, etc.

The SYSTEM OPTIONS panel is displayed when option 11 is entered on the PRIMARY OPTION MENU.

SYSTEM OPTIONS		OTTO for CICS V1R2		OTTOM16	
OPTION ===> _____					
SYSTEM OPTION	CURRENT	PERM.	CHANGE CURRENT	CHANGE PERM.	

DBCS support	NO	NO	___	___	
User exit active	NO	NO	___	___	
Name of user exit	-NA-	-NA-	___ (SUFFIX)	___ (SUFFIX)	
Application ID	CICS1		_____	_____	
OTTO mods loaded	YES	NO			
Date formatting	EUROPEAN	EUROPEAN	___ A, E, J	___ A, E, J	
			A(mērican), E(uropean), J(ulian)		
Transaction ID	NO	NO	___	___	
Terminal ID	CICS	CICS			
STATUS OF OTTO CONTROL FILE:					

OPEN			CLOSE CONTROL FILE . . .	___	YES

F1=Help	F3=End	F1=Help	F3=End		

Figure 5: SYSTEM OPTIONS Panel (OTTOM16)

Use the SYSTEM OPTIONS panel to define general parameters applicable to your site. Like all optimization definitions, these general parameter values may be active on a CURRENT basis (meaning active at this moment) or PERMANENT (meaning they are also updated in the control file for activation at the next startup of the TP system).

Using the Panel

1. To temporarily change a parameter, enter the new value in the CHANGE CURRENT column and press <ENTER>. Parameter definitions are provided below in the Fields section for this panel.
2. To permanently change a parameter, enter the new value in the CHANGE PERM column and press <ENTER>. When a new value is entered permanently, the new value also becomes currently active.

Fields

<i>DBCS support</i>	Is DBCS supported? YES or NO The default is NO .
<i>User exit active</i>	To dynamically activate a suffixed user exit program, enter YES . To dynamically deactivate a suffixed user exit program, enter NO . Note: When activating the user exit, a suffix name must be entered in the next field. For more details on user exits, see "Appendix B: User Exit Support".
<i>Name of user exit</i>	If a user exit is active, enter the suffix name for the user exit. For more details on user exits, see "Appendix B: User Exit Support".
<i>Application ID</i>	Defines an application ID to be used instead of the original TP system application ID. This ID is displayed on CICS OTTO's command screen (OTTO Compatibility Mode). Normally this ID is taken from the CICS SIT. This is for informational purposes only. To reset an application ID, enter a blank in this field. The distributed default ID is blank.
<i>OTTO mods loaded</i>	Indicates whether CICS OTTO's command execution modules (needed for manipulating optimization features) are permanently loaded in the main storage. Normally, when the OTTO Compatibility Mode is accessed, all native command modules are loaded and will remain loaded even after exiting the Compatibility mode.
<i>Date formatting</i>	Enter the date format to be displayed on panels and used on printed reports. Valid input: J = JULIAN (YYYY-DDD) E = EUROPEAN (DD-MM-YYYY) A = AMERICAN (MM-DD-YYYY).
<i>Transaction ID</i>	Indicates whether module names should be considered to specify CICS program names or CICS transaction IDs. Valid input: ON Exclusion/selection is based on the transaction ID. OFF Exclusion/selection is based on the program name.

Terminal ID

Indicates whether the LU name is taken from the TP-system terminal definition (CICS) or as VTAM node name. Valid input:

CICS

IMS

VTAM

***STATUS OF OTTO
CONTROL FILE***

Indicates whether CICS OTTO's control file, OTTOCMD, is opened or closed.

***CLOSE CONTROL
FILE***

Enter YES to close the control file, OTTOCMD. This is necessary before any command processing can run parallel in batch using the ABLBAT utility. See the "Batch Utilities" chapter of this book.

This page intentionally left blank.

CHAPTER 7: STARTING AND STOPPING OPTIMIZATION

The START/STOP panel is displayed when option 1 is entered on the PRIMARY OPTION MENU.

START / STOP		OTTO for CICS V1R2		OTTOM02	
OPTION ===> _____					
Valid Input for Status: 1 - START FULL 2 - START SELECTED 3 - STOP					
COMPONENT	CURRENT Status	PERMANENT Status	CHANGE CURRENT Status	CHANGE PERM. Status	
3270T	FULLY STARTED	FULLY STARTED	—	—	
3270P	STOPPED	STOPPED	—	—	—
SCS	FULLY STARTED	FULLY STARTED	—	—	
3600	SELECTED STARTED	SELECTED STARTED	—	—	

F1=Help		F3=End			

Figure 6: START/STOP Panel (OTTOM02)

This panel displays the current optimization status for each component and the status of the components on CICS OTTO's control file. For each individual component type, optimization can be started fully or selectively, or it can be stopped for each component. When optimization is fully started, all messages will be optimized except for those which are excluded either because of active LU exclusions or module exclusions. When optimization is started selectively, only messages which are designated to terminals or printers which are in CICS OTTO's selection list will be optimized.

On the panel the component 3270 has been split into 3270T and 3270P so that terminals or printers can be started or stopped independently.

The START/STOP status is displayed in the CURRENT and PERMANENT status columns. CURRENT refers to the status that is active at this moment. PERMANENT refers to the status that is reflected in the control file. At startup, the PERMANENT status is always reflected as the CURRENT status. The CURRENT status can be temporarily changed without changing the PERMANENT status. However, changing the PERMANENT status also changes the CURRENT status.

Using the Panel

To control optimization for each component type, enter one of the following status codes in either the CHANGE CURRENT Status field or the CHANGE PERM. Status field:

Enter:	To do this:
1	Start full optimization of the component. When fully started, all messages are optimized except for those which are excluded either because of active LU exclusions or module exclusions. For details on exclusions, see "Excluding LUs" and "Excluding Modules" beginning on page 61.
2	Start selective optimization of the component. When selectively started, only messages which are designated to terminals or printers which are in the selection list are optimized. To explicitly select logical units for optimization, see "Selective LU Inclusion" on page 64.
3	Stop optimization for the specific component.

Fields

COMPONENT	Displays the type of component for which optimization can be started or stopped.
CURRENT Status	Displays the optimization status that is active at this time.
PERMANENT Status	Displays the permanent optimization status that is based on the control file.
CHANGE CURRENT Status	Allows you to change the current optimization status for the component. This change is effective for the current process only. Valid input: 1, 2, or 3.
CHANGE PERM. Status	Allows you to change the permanent optimization status for the component. This change will be updated to the control file. Changing the PERMANENT status also changes CURRENT status. Valid input: 1, 2, or 3.

CHAPTER 8: DISPLAY AND CONTROL IMAGE POOL SIZE

This chapter explains how to display and control the image pool using CICS panels. Additionally, frequently asked questions are listed.

The IMAGE POOL panel is displayed when option 2 is entered on the PRIMARY OPTION MENU.

```
IMAGE POOL                                OTTO for CICS V1R2                                OTTOM04

OPTION ===> _____

                                Image Pool Statistics

Number of slots generated . . : 00004                Shortage deletions . . : 00002
Number of slots in use . . . : 00003                Delete requests . . . : 00004
Average image length . . . . : 02757 Bytes          Image not saved . . . : 00005
Length of longest image . . . : 06696 Bytes         Image not found . . . : 00013
Length of shortest image . . . : 01992 Bytes

POOL SIZE SETTINGS                    CURRENT          PERMANENT          CHANGE PERM.
-----                    -----          -----          -----
Total pool size in KB                00016          00016
Slot size in bytes                    4000          1024

-----
F1=Help      F3=End
```

Figure 7: IMAGE POOL Panel (OTTOM04)

Use this panel to change the size of CICS OTTO's image pool. The image pool is allocated in the private area above 16MB. Imaging means a copy of each screen is kept in main storage. CICS OTTO's image pool is used for this. Imaging starts with the first outbound message written by the application with an ERASE/WRITE. All of the following messages that are destined to the same terminal will be compared with the existing data in the screen image and only changed data and attributes will be transmitted after the optimization process. Consequently, the screen image is updated with the new data and attributes.

The minimum pool size is 16 KB and the maximum size is 99999 KB. The minimum slot size is 256 bytes and the maximum is 9996 bytes. The optimum size is the one using the smallest number of slots to save one image. Check your pool settings against the displayed values after the system has been used for a while. Any new slot size defined here becomes active at the next startup of the TP system. The total amount of the image pool can be increased dynamically while CICS is running. CICS OTTO will try to obtain additional storage according to the SIZE specification and concatenate it to the existing pool with the old slot size specification. However, the changing of the slot size cannot be serviced while the TP system is still up (that also means no current changing is possible). Slot size changes become active at the next TP system startup.

The default value for the distributed image pool is 16 KB with a slot size of 1024 bytes. For more information regarding the image pool size, see "Considerations" on page 13.

Using the Panel

To use the IMAGE POOL panel, follow these instructions:

1. Review the actual Image Pool Statistics that are displayed. An explanation of these fields is provided below in the Output Fields section for this panel.
2. If desired, change the Pool Size Settings by entering a new size in the CHANGE PERM. field as detailed below in the Input Fields section for this panel. When a new permanent setting is entered, the CURRENT setting is changed also.

Output Fields

<i>Number of slots generated</i>	Number of slots generated by CICS OTTO. This is the maximum number of slots in the existing pool.
<i>Number of slots in use</i>	Number of slots which are currently used to save screen images.
<i>Average image length</i>	Average length of all saved images since startup.
<i>Length of shortest/longest image</i>	Self explanatory.
<i>Shortage deletions</i>	Number of image deletions because the pool is full.
<i>Delete requests</i>	Number of explicit image deletions.
<i>Image not saved</i>	Number of images not saved.
<i>Image not found</i>	Number of 'image not found' conditions.

Input Fields

<i>Total pool size in KB</i>	To change the permanent total pool size setting, in the CHANGE PERM field, you may enter a value from 16 to 99999 . If the new size is a lower value, the decrease will be reflected at the next startup. If the new pool size is higher, a dynamic increase will be done immediately.
<i>Slot size in bytes</i>	To change the permanent slot size in bytes, enter a value from 256 to 9996 in the CHANGE PERM field. The length can be set to the average image length to make sure that a minimum of main storage is used by CICS OTTO. The entered value will be rounded to a fullword.

8.1 FAQs About the Image Pool

This section includes some commonly asked questions about the image pool.

How is the image pool allocated?

The image pool is allocated with a pre-defined size at the startup of CICS OTTO. This pool is a GETMAIN area and cannot be decreased while the TP system is up. The whole pool is used to keep screen images.

How do I calculate the pool size?

The pool should be big enough to capture all images of all terminals. It can be calculated by the following formula:

number of terminals * average image length

How do I know the pool is full?

The value in the "Shortage deletions" field of the pool statistics will indicate whether the pool is full. This value shows how many times CICS OTTO must delete an old image to be able to keep a new one -- this value should be zero or small.

The image pool should be enlarged only if the Image Shortage Deletion Count in the pool statistics is high, measured for at least one day. Keep in mind that the first message for a terminal always results in an image not found condition and thus increments this count.

What does the average image length have to do with slot size?

The average image length may be used to set the value for the SLOT size so that optimum usage of the image pool can be achieved. It is also recommended to use a part of the average image length -- because if there is a message of only 100 bytes also a full slot is used to keep it.

The number of generated slots represents the total pool size divided by the slot size.

What happens if the pool is full?

If the image pool is full, CICS OTTO will try to get space to save a new image. This is done by deleting images without transparent screen modifications (this means that CICS OTTO does not modify the bits on the screen). If possible, images that were not modified are deleted.

There are no messages issued in this case (100% full). CICS OTTO tries to free slots of other terminals (referred to as 'shortage deletions' in the image pool statistics). If enough slots cannot be freed, the new image cannot be saved and optimization for that message is performed as if the optimization level is 'OUT-NOIMAGE'.

When are images released?

Existing images are released when:

1. CICS OTTO tries to save a new image and there is no space in the image pool. CICS OTTO deletes the oldest image and increments the shortage deletions.
2. The CLEAR key is pressed.
3. An OPT OUT NOIMAGE is temporarily set for some reason.
4. A module is excluded.

For whatever reason, a message for a given terminal should not be optimized.

CHAPTER 9: COMPONENT BASED OPTIMIZATION CONTROL

This chapter explains how to control the optimization features for 3270 and 3600/SCS components.

9.1 3270 Component Based Optimization Control

The 3270 OPT. CONTROL panel is displayed when option 3 is entered on the PRIMARY OPTION MENU.

3270 OPT. CONTROL	OTTO for CICS V1R2	OTTOM05		
OPTION ==> _____				
3270 COMPONENT SETTINGS	CURRENT	PERM.	CHANGE CURRENT	CHANGE PERM.
Imaging	ON	ON	---	---
Compress images	OFF	OFF	---	---
Lightpen	OFF	OFF	---	---
3179/3192 C	OFF	OFF	---	---
WCC-Ignore	OFF	OFF	---	---
Base Color Switch	OFF	OFF	---	---
Zero MF order allowed	OFF	OFF	---	---
Clear TIOA	OFF	OFF	---	---
Printer linesize	132	132	---	---
Blank elimination	OFF	OFF	---	---
Field Merge	OFF	OFF	---	---

F1=Help F3=End

Figure 8: 3270 OPT. CONTROL Panel (OTTOM05)

Use the 3270 OPT. CONTROL panel to change CICS OTTO's optimization features for all connected 3270 terminals and printers, except for those which have special settings for LU or modules different from the 3270 component values.

The settings for each optimization feature are displayed in the CURRENT and PERM. columns. CURRENT refers to the setting that is active at this moment. PERM. refers to the status that is reflected in the control file. At startup, the PERMANENT status is always reflected as the CURRENT status. The CURRENT status can be temporarily changed without changing the PERMANENT status. However, changing the PERMANENT status also changes the CURRENT status.

Using the Panel

To use the 3270 OPT. CONTROL panel, follow these instructions:

1. To change a 3270 component setting, enter a new setting in the CHANGE CURRENT or CHANGE PERM. fields. The CHANGE CURRENT field allows you to change the current active value of the optimization feature. The CHANGE PERM. field allows you to change the permanent value on the control file. The optimization features and component settings for this panel are defined below.
2. To update the change, press <ENTER>. The changed setting is reflected in the corresponding CURRENT or PERM. fields.

Optimization Features

The following field explanations of CICS OTTO's optimization features have the same meaning for LUs and modules.

Imaging	Switches CICS OTTO's imaging feature <i>ON</i> or <i>OFF</i> .
Compress images	Keeps images in a compressed format in main storage to save memory. This keeps the image pool requirements low by compressing the saved screen images up to 50%. However, if the compression is switched on, this requires some CPU overhead. Therefore, if enough main storage is available the compression should be switched off. This should always be the case in a z/OS® environment. The default value of this feature is 'OFF'.
Lightpen	Determines if there are terminals in your installation which have a light pen. The distributed default value is 'OFF'.
3179/3192 C	Determines if there are 3179 or 3192 type terminals in your installation. This may decrease the optimization ratio and should be set 'OFF' whenever possible. The distributed default value is 'OFF'.
WCC-Ignore	Determines if the line length in the WCC of data streams destined for a 3270 printer should be considered by CICS OTTO 'OFF' or if it should be ignored and default to a line length of 80 'ON'. The distributed default value is 'OFF'.

Base Color Switch	Determines if there are terminals in your installation which have the BASE COLOR SWITCH 'ON'. This may decrease the optimization ratio and should be set 'OFF' whenever possible. The distributed default value is 'OFF'.
Zero MF order allowed	Determines if the MF-order (modify field) may be generated with a zero number of pairs. This is allowed according to the 3270 data stream conventions but may lead to problems with some kind of emulation or with terminals that are not 100% IBM compatible. It should be set to 'ON' whenever applicable to increase the optimization effect. The default value is 'OFF'.
Clear TIOA	Determines if the CICS terminal input/output area (TIOA) should be cleared before moving the optimized message to it. This causes CPU overhead and should only be activated (ON) if there are transactions in your CICS system which do not use the length field of the TIOA (TIOADL) to determine the length of the incoming data but rather scan the whole I/O area for incoming data. Enter 'ON' to use this feature. The distributed default value is 'OFF'.
Printer linesize	<p>Sets the standard line size for LU type 3 printers. Valid entries are 40, 64, 80, or 132. There is no distributed default value for this field.</p> <p>This value is used if the printer message does not contain a line size indicator in WCC and the feature WCC-IGNORE is set 'OFF'.</p>
Blank Elimination	<p>Changes all blanks in protected fields to hexadecimal nulls. Enter 'ON' to use this feature. The distributed default value is 'OFF'.</p> <p>Note: Blank elimination optimization may only be used when Imaging is used.</p>
Field Merge	<p>Omits the transmission of specific attributes of protected fields after the optimization process. Enter 'ON' to use this feature. The distributed default value is 'OFF'.</p> <p>Note: Field Merge optimization may only be used when Imaging is used.</p>

9.2 3600/SCS Component Based Optimization Control

The 3600/SCS OPT. CONTROL panel is displayed when option 4 is entered on the PRIMARY OPTION MENU.

3600/SCS OPT. CONTROL		OTTO for CICS V1R2		OTTOM06	
OPTION ====> _____					
3600 COMPONENT SETTINGS		CURRENT	PERM.	CHANGE CURRENT	CHANGE PERM.
-----		-----	-----	-----	-----
Prime compr. character	X'40'	X'40'	X' ___ '	X' ___ '	
Input optimization	ON	ON	___	___	
Clear TIOA	OFF	OFF	___	___	
SCS COMPONENT SETTINGS		CURRENT	PERM.	CHANGE CURRENT	CHANGE PERM.
-----		-----	-----	-----	-----
SCS linesize	121	132	___	___	
Opt. as SCS / 3270	SCS	SCS	___	___	

F1=Help		F3=End			

Figure 9: 3600/SCS OPT. CONTROL Panel (OTTOM06)

Use the 3600/SCS OPT. CONTROL panel to change CICS OTTO's optimization features for all of the connected 3600/4700 terminals or SCS printers, except for those which have special settings for LUs or modules different from the 3600/4700 or SCS component values.

The settings for each optimization feature are displayed in the CURRENT and PERM. columns. CURRENT refers to the setting that is active at this moment. PERM. refers to the status that is reflected in the control file. At startup, the PERMANENT status is always reflected as the CURRENT status. The CURRENT status can be temporarily changed without changing the PERMANENT status. However, changing the PERMANENT status also changes the CURRENT status.

Using the Panel

To use the 3600/SCS OPT. CONTROL panel, follow these instructions:

1. To change a component setting, enter a new setting in the CHANGE CURRENT or CHANGE PERM. fields. The CHANGE CURRENT field allows you to change the current active value of the optimization feature. The CHANGE PERM. field allows you to change the permanent value on the control file. The optimization features and component settings are defined below for this panel.
2. To update the change, press <ENTER>. The changed setting is reflected in the corresponding CURRENT or PERM. fields.

Optimization Features

The following field explanations of CICS OTTO's optimization features have the same meaning for LUs and modules.

Prime compr. char. Defines the hexadecimal specification of the prime compression character for 3600/4700 type devices. The distributed component default value is BLANK (X'40').

Input Optimization Activates (*ON*) or deactivates (*OFF*) CICS OTTO's input optimization for 3600/4700 type terminals.

Clear TIOA Determines if the CICS terminal input/output area (TIOA) should be cleared before moving the optimized inbound message to it. This causes CPU overhead and should only be activated if there are transactions in your CICS system which do not use the length field of the TIOA (TIOADL) to determine the length of the incoming data but rather scan the whole I/O area for incoming data. Enter '*ON*' to use this feature. The distributed default value is '*OFF*'.

SCS linesize Sets the standard line size for SCS printers. Valid input is 1 through 999. The distributed component default value is 132.

Opt. as SCS / 3270 Sets the optimization technique for SCS printers like SCS or 3270. The distributed component default value is SCS.

For more details, see "SCS Optimization Techniques" on page 6.

This page intentionally left blank.

CHAPTER 10: LU BASED OPTIMIZATION CONTROL

One or more component defaults may be overwritten by specific terminal settings (referred to as Logical Unit = LU in this chapter). All options as described for the components may be set for one or more LUs. These LU settings have a higher priority than the component values.

10.1 LU Based Optimization Control Menu

The LU BASED OPT. CONTROL menu is displayed when option 5 is entered on the PRIMARY OPTION MENU.

```
LU BASED OPT. CONTROL          OTTO for CICS V1R2          OTTOM07

OPTION ====> _____

      1. Specify Optimization Values for Specific LU
      2. Display a List of all LUs with Specific Settings
      3. Display Active 3270 Terminals
      4. Display Active 3270 Printers
      5. Display Active 3600 Terminals
      6. Display Active SCS Printers

LU NAME . . _____ For option 1 : input required
                          full or generic name
                          ("* " not allowed)

                          For option 2-6: input optional, default = *
                          full or generic name
                          ("* " allowed)

-----
F1=Help      F3=End
```

Figure 10: LU BASED OPT. CONTROL Panel (OTTOM07)

Use the LU BASED OPT. CONTROL menu to select several panels that allow you to view or change CICS OTTO's optimization features for a single LU or a group of specific terminals/printers (LUs) connected to the TP system.

Using the Panel

To use the LU BASED OPT. CONTROL menu, place the cursor in the OPTION field and type one of the following option numbers:

Enter: **To do this:**

- 1 Define optimization features for a specific LU or a group of terminals by using a generic name different from the component values. An LU name must be entered in the LU NAME field. If the LU name already exists in CICS OTTO's optimization process, the active values for this LU are displayed. Otherwise, a new entry is generated if you change one of the displayed active component values.

- 2 Display a list of all LUs which have a different setting from their component sorted by name. To limit the list, select a group of LUs by entering a generic name in the LU NAME field.
- 3 Display a list of all active 3270 terminals sorted by name. To limit the list, select a group of LUs by entering a generic name in the LU NAME field.
- 4 Display a list of all active 3270 printers sorted by name. To limit the list, select a group of LUs by entering a generic name in the LU NAME field.
- 5 Display a list of all active 3600 terminals sorted by name. To limit the list, select a group of LUs by entering a generic name in the LU NAME field.
- 6 Display a list of all active SCS printers sorted by name. To limit the list, select a group of LUs by entering a generic name in the LU NAME field.

10.2 Displaying LU Selection Lists

The LU LIST panel is displayed when options 2 through 6 are entered on the LU BASED OPT. CONTROL menu.

```

LU LIST      (lu type)                OTTO for CICS V1R2                OTTOM08

OPTION ==> _____ DISPLAY CRITERIA * _____  Entries      1 to 44 of 48
                                           MORE:      +
                                           Selection for LU based optimization control

  LU              LU              LU              LU
-----
- LU00*          - LU01*          - LU02*          - LU03*
- LU11*          - LU12*          - LU13*          - LU14*
- LU15*          - LU16*          - LU17*          - LU18*
- LU19*          - LU21*          - LU22*          - LU23*
- LU24*          - LU25*          - LU26*          - LU27*
- LU28*          - LU29*          - LU31*          - LU32*
- LU33*          - LU34*          - LU35*          - LU36*
- LU37*          - LU38*          - LU39*          - LU41*
- LU42*          - LU43*          - LU44*          - LU45*
- LU46*          - LU47*          - LU48*          - LU49*
- AAAA          - BLA            - PR00          - PR01

                                           MORE...

-----
F1=Help  F3=End  F4=Return  F7=Backward  F8=Forward
  
```

Figure 11: LU LIST Panel (OTTOM08)

The LU LIST panel contains a list of all LUs selected in the LU BASED OPT. CONTROL menu. Use this panel to select one or more LUs to view or change their optimization settings. The specific type of LUs listed depends on the option (2 through 6) entered on the LU BASED OPT. CONTROL menu:

- All LUs with specific settings.
- Active 3270 terminals and printers.
- Active 3600 terminals.
- Active SCS printers.

The specific type of LUs listed is shown in (lu type) on the top line of the panel.

Using the Panel

1. To select an LU, place the cursor on the underscore field to the left of the displayed LU name and type an S. You can select one or more of the LU names.
2. Press <ENTER> after selecting an LU(s).

3. Depending on the type of LU LIST displayed, the appropriate LU OPT. CONTROL panel is displayed as illustrated in the remaining sections of this chapter.
4. If more than one LU was selected by entering **S**, a panel for the next selected LU is displayed after returning from the called panel by pressing <F3>. After exiting the panel for the last selected LU, the LU list is displayed again with the names of selected LUs highlighted. You can select new LUs, go to another option, or return.

Fields

DISPLAY CRITERIA

Contains the full or generic LU name as entered on the LU BASED OPT. CONTROL menu or the default value *. You can define another selection for this list by changing the LU value in this field.

Entries

Contains the number of LUs displayed on this screen (from/to) and the total LUs found for the specified display criteria.

10.3 LU Based Optimization - 3270 Terminals/Printers

The 3270 LU OPT. CONTROL panel for terminals and printers is displayed as a result of one of the following actions:

- Entering a 3270 terminal/printer name on the LU BASED OPT. CONTROL menu and selected option 1 (SPECIFY OPTIMIZATION VALUES FOR SPECIFIC LU), or
- Selecting a 3270 device by entering an S on an LU based selection list, or
- Typing a name into the NEXT LU field on this same panel and the terminal/printer is already active (in CICS OTTO's optimization process) and is a 3270 device type.

3270 LU OPT. CONTROL		OTTO for CICS V1R2		OTTOM10	
OPTION ==> _____			NEXT LU _____		
SETTINGS FOR LU SET2	CURRENT (Component values in parenth.)	PERM. (Component values in parenth.)	CHANGE CURRENT	CHANGE PERM.	
Imaging	ON (ON)	ON (ON)	---	---	
Compress images	OFF (OFF)	OFF (OFF)	---	---	
Lightpen	OFF (OFF)	OFF (OFF)	---	---	
3179/3192 C	OFF (OFF)	OFF (OFF)	---	---	
WCC-Ignore	N/A (N/A)	N/A (N/A)	---	---	
Base Color Switch	OFF (OFF)	OFF (OFF)	---	---	
Zero MF order allowed	OFF (OFF)	OFF (OFF)	---	---	
Clear TIOA	OFF (OFF)	OFF (OFF)	---	---	
Blank elimination	OFF (OFF)	OFF (OFF)	---	---	
Field Merge	OFF (OFF)	OFF (OFF)	---	---	
Printer line size	N/A (N/A)	N/A (N/A)	---	---	

 F1=Help F3=End F4=Return

Figure 12: 3270 LU OPT. CONTROL Panel (OTTOM10)

For details on using this panel and for a description of the specific optimization features that can be controlled here, see "3270 Component Based Optimization Control" on page 41.

To go to another LU, type the name into the NEXT LU field.

10.4 LU Based Optimization - 3600 Terminals

The 3600 LU OPT. CONTROL panel is displayed as a result of one of the following actions:

- Entering a 3600 terminal name on the LU BASED OPTIMIZATION CONTROL menu and selecting option 1 (SPECIFY OPTIMIZATION VALUES FOR SPECIFIC LU), or
- Selecting a 3600 terminal by entering an S on an LU based selection list, or
- Typing a name into the NEXT LU field on this same panel and the terminal is already active (in CICS OTTO's optimization process) and is a 3600 device type.

3600 LU OPT. CONTROL		OTTO for CICS V1R2		OTTOM11	
OPTION ==> _____			NEXT LU _____		
SETTINGS FOR LU T012		CURRENT (Component values in parenth.)	PERM.	CHANGE CURRENT	CHANGE PERM.

Prime compr. char.	X'40' (X'00')	X'40' (X'00')	X' ___ '	X' ___ '	
Input optimization	ON (OFF)	ON (OFF)			
Clear TIOA	ON (OFF)	ON (OFF)	_____	_____	

F1=Help	F3=End	F4=Return			

Figure 13: 3600 LU OPT. CONTROL Panel (OTTOM11)

For details on using this panel and for a description of the specific optimization features that can be controlled here, see "3600/SCS Component Based Optimization Control" on page 44.

To go to another LU, type the name into the NEXT LU field.

10.5 LU Based Optimization - SCS Printers

The SCS LU OPT. CONTROL panel is displayed as a result of one of the following actions:

- Entering an SCS printer name on the LU BASED OPTIMIZATION CONTROL menu and selecting option 1 (SPECIFY OPTIMIZATION VALUES FOR SPECIFIC LU), or
- Selecting an SCS printer by entering an S on an LU based selection list, or
- Typing a name into the NEXT LU field on this same panel and the LU is already active (in CICS OTTO's optimization process) and is an SCS printer.

SCS LU OPT. CONTROL		OTTO for CICS V1R2		OTTOM12	
OPTION ==> _____		NEXT LU _____			
SETTINGS FOR LU	CURRENT	PERM.	CHANGE	CHANGE	
SCS1	(Component values in parenth.)		CURRENT	PERM.	

Printer linesize	121 (121)	121 (132)	_____	_____	
Opt. as SCS / 3270	3270 (SCS)	3270 (SCS)	_____	_____	

F1=Help	F3=End	F4=Return			

Figure 14: SCS LU OPT. CONTROL Panel (OTTOM12)

For details on how to use this panel and for a description of the specific optimization features that can be controlled here, see "3600/SCS Component Based Optimization Control" on page 44.

To go to another LU, type the name into the NEXT LU field.

10.6 LU Based Optimization - LU Not Active

The LU OPT. CONTROL panel is displayed as a result of one of the following actions:

- Entering an LU name for an LU which is not active on the LU BASED OPT. CONTROL menu and selecting option 1 (SPECIFY OPTIMIZATION VALUES FOR SPECIFIC LU), or
- Selecting an LU name which is not active by entering an S on an LU based selection list, or
- Typing a name into the NEXT LU field on this same panel and the LU is **not** active yet (in CICS OTTO's optimization process).

In this case all possible optimization values of all components are displayed and must be changed according to your special device type. The specified values are activated at the first connection of this LU to the TP system.

LU OPT. CONTROL		OTTO for CICS V1R2			OTTOM13	
OPTION ==> _____		NEXT LU _____				
LU . . . SE17	CURRENT	PERM.	CHG. CURRENT	CHG. PERM.		
Imaging	ON (ON)	ON (ON)	_____	_____		
Lightpen	OFF (OFF)	OFF (OFF)	_____	_____		
WCC-Ignore	OFF (OFF)	OFF (OFF)	_____	_____		
Base Color Switch	OFF (OFF)	OFF (OFF)	_____	_____		
Printer linesize	121 -NA-	132 -NA-	_____	_____		
Prime compr. char.	X'40' (X'40')	X'40' (X'40')	X'____'	X'____'		
Compress images	OFF (OFF)	OFF (OFF)	_____	_____		
3179/3192 C	OFF (OFF)	OFF (OFF)	_____	_____		
Zero MF order allowed	OFF (OFF)	OFF (OFF)	_____	_____		
Opt. as SCS / 3270	SCS (SCS)	SCS (SCS)	_____	_____		
Clear TIOA	OFF (OFF)	OFF (OFF)	_____	_____		
Blank elimination	OFF (OFF)	OFF (OFF)	_____	_____		
Field Merge	OFF (OFF)	OFF (OFF)	_____	_____		

F1=Help F3=End F4=Return F9=Delete Entry

Figure 15: MODULE OPT. CONTROL Panel (OTTOM13)

For details on how to use this panel and for a description of the specific optimization features that can be controlled here, see "Chapter 9: Component Based Optimization Control" on page 41.

To go to another LU, type the name into the NEXT LU field.

CHAPTER 11: MODULE BASED OPTIMIZATION CONTROL

This chapter explains how to control optimization by defining the optimization features for modules. For modules, the following optimization features may be set:

```
Imaging
Clear TIOA
WCC-Ignore
Prime compr. char.
Lightpen
SCS Optimization
Printer linesize
Blank elimination
Field Merge
```

The highest priority for settings is 1) the module, 2) the LU, and 3) the component. For complete information, see "Chapter 1: Optimization Features" on page 1.

This means if one or more of the above options is set for a specific module and the setting is different from the component settings or the LU specific settings, the module settings are used for the messages sent by the specific module destined to the specific LU. All other options which can be set for the component or LU—but **not** for a module—are taken from the component settings or eventually present LU settings.

For example, assume the following commands are issued using the online dialog or the native command language for components and LUs:

```
SET OPTIMIZATION OUT IMAGE ALL PERM
SET BLANKELIM ON LU=name PERM
SET FMERGE ON MOD=pgm PERM
SET WCC-IGNORE ON MOD=pgm PERM
```

As a result, the following highlighted settings are active for the component, LU and module:

	Component Value	LU Value	Module Value	Resulting Value
Imaging	ON	ON	ON	ON
Clear Tioa	OFF	OFF	OFF	OFF
Lightpen	OFF	OFF	OFF	OFF
WCC-Ignore	OFF	OFF	ON	ON

Now, if a message is sent by the module *pgm* to the LU *name* the module settings for the above options are taken. All options which are not explicitly set for a module are defaulted from the component or the LU (if the LU definitions exist).

One or more component defaults may be overwritten by specific module settings. These module settings have a higher priority than the component values and - if any exist - the LU values.

11.1 Module Based Optimization Control Menu

This MOD. BASED OPT. CONTROL menu is displayed when option 6 is entered on the PRIMARY OPTION MENU.

```
MOD. BASED OPT. CONTROL          OTTO for CICS V1R2          OTTOM09

OPTION ====> _____

      1. Specify Optimization Values for Specific Module
      2. Display a List of all Modules with Specific Settings

MODULE . . _____ For option 1 : input required
                        Full or generic name
                        ("* " not allowed)

                        For option 2 : input optional, default = *
                        Full or generic name
                        ("* " allowed)

-----
F1=Help      F3=End
```

Figure 16: MOD. BASED OPT. CONTROL Panel (OTTOM09)

Use the MOD. BASED OPT. CONTROL panel to select several panels that allow you to view or change CICS OTTO's optimization features for one or a group of specific modules.

Using the Panel

To use the MOD. BASED OPT. CONTROL menu, place the cursor in the OPTION field and type one of the following option numbers and define a MODULE name if required:

Enter: To do this:

- 1** Set optimization features different from the component values for one or a group of modules by using a generic name. A module name must be entered in the MODULE field. If the module name entered already exists in CICS OTTO's optimization process, the active values for this module are displayed. Otherwise, a new entry is generated when you change one of the displayed values.
- 2** Display a list of all modules which have a different setting from the components sorted by name. All modules are displayed if no module name is entered in the MODULE field. Optionally, select a group of modules by using generic name.

11.2 Display Module Selection List

The MOD. LIST is displayed when option 2 is entered on the MOD. BASED. OPT. CONTROL menu.

```
MOD. LIST (SPEC. SETT.)          OTTO for CICS V1R2          OTTOM08
OPTION ==>> _____ DISPLAY CRITERIA * _____ Entries 1 to 3 of 3
                               Selection for module based optimization control
MODULE          MODULE          MODULE          MODULE
-----
_ MOD00000      _ MOD00001      _ OTTO*
-----
F1=Help  F3=End  F4=Return  F7=Backward  F8=Forward  F9=Delete ALL
```

Figure 17: MOD. LIST Panel (OTTOM08)

The MOD. LIST panel contains a list of all active modules which have specific settings. Use this panel to select one or more modules and view or change the optimization settings for the selected module(s).

Using the Panel

1. To select a module, place the cursor on the underscore field to the left of the displayed module name and type an S. You can select one or more of the modules to work with.
2. Press <ENTER> after selecting a module(s). The MOD. OPT. CONTROL panel is displayed on which you can view or edit the optimization features for the specific module.
3. If more than one module was selected by entering S, a panel for the next selected module is displayed after returning from the called panel by pressing <F3>. After exiting the panel for the last selected module, the module list is displayed again with the names of the selected terminals highlighted. You can select new modules, go to another option, or return.

Fields

DISPLAY CRITERIA Contains the full or generic module name as entered on the MOD. BASED OPT. CONTROL menu or the default value *. You can define a different selection for this list by changing the module value in this field.

Entries Contains the number of modules displayed on this screen (from/to) and the total modules found for the specified display criteria.

11.3 Module Based Optimization

The MODULE OPT. CONTROL panel is displayed as a result of one of the following actions:

- Entering a module name in the MOD. BASED OPT. CONTROL menu and selecting option 1.
- Selecting a module in the module based selection list (MOD. LIST panel).
- Typing a name into the NEXT MODULE field on this panel.

MODULE OPT. CONTROL		OTTO for CICS V1R2				OTTOM13	
OPTION ==> _____		NEXT MODULE . . . _____					
Module .	OTTO*	CURRENT		PERM.	CHG. CURRENT	CHG. PERM.	
Imaging		ON	(ON)	ON	(ON)	_____	_____
Lightpen		OFF	(OFF)	OFF	(OFF)	_____	_____
WCC-Ignore		OFF	(OFF)	OFF	(OFF)	_____	_____
Base Color Switch			(N/A)		(N/A)	_____	_____
Printer linesize		132	-NA-	080	-NA-	_____	_____
Prime compr. char.		X'00'	(X'00')	X'00'	(X'00')	X'____'	X'____'
Compress images			(N/A)		(N/A)	_____	_____
3179/3192 C			(N/A)		(N/A)	_____	_____
Zero MF order allowed			(N/A)		(N/A)	_____	_____
Opt. as SCS / 3270		SCS	(SCS)	SCS	(SCS)	_____	_____
Clear TIOA		OFF	(OFF)	OFF	(OFF)	_____	_____
Blank elimination		OFF	(OFF)	OFF	(OFF)	_____	_____
Field Merge		OFF	(OFF)	OFF	(OFF)	_____	_____

 F1=Help F3=End F4=Return F9=Delete Entry

Figure 18: MODULE OPT. CONTROL Panel (OTTOM13)

If the module is **not yet active** (in CICS OTTO's optimization process), all possible optimization values are displayed and must be changed according to your special needs. The specified values become effect at the moment the first message is sent by the specified module.

For details on how to use this panel and for a description of the specific optimization features that can be controlled here, see "Chapter 9: Component Based Optimization Control" on page 41.

To go to another module, type the name into the NEXT MODULE field.

This page intentionally left blank.

CHAPTER 12: OPTIMIZATION EXCLUSION AND SELECTION

CICS OTTO has two start modes:

1. FULLY STARTED - When CICS OTTO is FULLY STARTED all messages are included in optimization, except for specific LUs or modules that are excluded from the optimization process.
2. SELECTIVELY STARTED - When CICS OTTO is SELECTIVELY STARTED, the only messages that are optimized are those destined for specifically selected LUs that are included in the optimization process.

This chapter explains how to exclude LUs and modules from the FULLY STARTED mode and how to selectively include LUs when the SELECTIVELY STARTED mode is used. For more details on starting and stopping the optimization, see "Chapter 7: Starting and Stopping Optimization" on page 35.

12.1 Excluding LUs

The EXCL. LUS FROM OPT panel is displayed when option 7 is entered on the PRIMARY OPTION MENU.

EXCL. LUS FROM OPT.		OTTO for CICS V1R2				OTTOM14				
OPTION ==> _____		EXCLUDE LU				ENTRIES		PERMANENT . NO		
						1 TO 24 OF 41		MORE: +		
LU	EXCLUDE	INCLUDE	LU	EXCLUDE	temp.	perm.	temp.	perm.	temp.	perm.
	temp.	perm.		temp.	perm.					
LU00*	YES	YES	LU01*	YES	YES	---	---	---	---	---
LU02*	YES	YES	LU03*	YES	YES	---	---	---	---	---
LU11*	YES	YES	LU12*	YES	YES	---	---	---	---	---
LU13*	YES	YES	LU14*	YES	YES	---	---	---	---	---
LU15*	YES	YES	LU16*	YES	YES	---	---	---	---	---
LU17*	YES	YES	LU18*	YES	YES	---	---	---	---	---
LU19*	YES	YES	LU21*	YES	YES	---	---	---	---	---
LU22*	YES	YES	LU23*	YES	YES	---	---	---	---	---
LU24*	YES	YES	LU25*	YES	YES	---	---	---	---	---
LU26*	YES	YES	LU27*	YES	YES	---	---	---	---	---
LU28*	YES	YES	LU29*	YES	YES	---	---	---	---	---
LU31*	YES	YES	LU32*	YES	YES	---	---	---	---	---
MORE...										
F1=Help		F3=End		F4=Return		F7=Backward		F8=Forward		

Figure 19: EXCL. LUS FROM OPT. Panel (OTTOM14)

Use the EXCL. LUS FROM OPT. panel to; 1) exclude one or more LUs from optimization when CICS OTTO is FULLY STARTED (all LUs that are already excluded temporarily or permanently are displayed on this panel) and 2) remove LUs from exclusion.

Using the Panel

1. To exclude an LU, enter the LU name in the EXCLUDE LU field (generic notation is allowed). If you want to exclude this LU permanently, enter YES in the PERMANENT field (the default value is NO).
2. Press <ENTER>. The LU name should appear on the list of excluded LUs. The LUs displayed are sorted by name.
3. To remove an LU from exclusion temporarily, enter YES in the INCLUDE temp. column for the specific LU and press <ENTER>. Because this is a temporary include, the LU will again be excluded effective with the next system start up.
4. To remove an LU from permanent exclusion, enter YES in the INCLUDE perm. column for the specific LU. Press <ENTER> and the LU is removed from the list of excluded LUs.

Fields

EXCLUDE LU	Enter the name of the LU to be excluded from optimization when CICS OTTO is FULLY STARTED.
PERMANENT	To exclude an LU temporarily, enter NO . A temporarily excluded LU becomes included effective with the next system startup. To exclude an LU permanently, enter YES . A permanently excluded LU remains excluded effective with each system startup.
ENTRIES	Displays the number of excluded LUs that may be viewed on the panel.
LU Columns	Displays the name of LUs that are excluded from optimization.
EXCLUDE Columns	Indicates with a YES or a NO whether the LU is excluded temporarily or permanently from optimization.
INCLUDE Columns	To temporarily include an LU in optimization, enter YES in the temp. column. The LU will again be excluded effective with the next system startup. To permanently include an LU in optimization, enter YES in the perm. column. The LU is removed from the list of excluded LUs.

12.2 Excluding Modules

The MOD. EXCLUSIONS panel is displayed when option 8 is entered on the PRIMARY OPTION MENU.

MOD. EXCLUSIONS		OTTO for CICS V1R2				OTTOM14			
OPTION ===> _____		EXCLUDE MODULE				PERMANENT . NO			
		ENTRIES				1 TO 3 OF 3			
MODULE	EXCLUDE		INCLUDE		MODULE	EXCLUDE		INCLUDE	
	temp.	perm.	temp.	perm.		temp.	perm.	temp.	perm.
DFH3270P	YES	YES	___	___					

F1=Help F3=End F4=Return F7=Backward F8=Forward

Figure 20: MOD. EXCLUSIONS Panel (OTTOM14)

Use the MOD. EXCLUSIONS panel to exclude one or more modules from optimization when CICS OTTO is FULLY STARTED. All modules that are already excluded temporarily or permanently are displayed on this panel. Therefore, this panel is also used to remove modules from exclusion.

The use of this panel and the field descriptions are the same as detailed for LU exclusions in the previous section.

12.3 Selective LU Inclusion

When CICS OTTO is SELECTIVELY started, only explicitly defined LUs are included in optimization.

Note: Modules cannot be selectively included in the optimization process because all module messages are optimized except excluded modules.

The SELECT LUS FOR OPT. panel is displayed when option 9 is entered on the PRIMARY OPTION MENU.

SELECT LUS FOR OPT.										OTTO for CICS V1R2										OTTOM14									
OPTION ==> _____										SELECT LU										PERMANENT . NO									
										ENTRIES										1 TO 2 OF 2									
LU		SELECT		UNSELECT		LU		SELECT		UNSELECT		temp.		perm.		temp.		perm.		temp.		perm.							
SET9	YES	YES	___	___	BLUB	YES	YES	___	___																				

F1=Help F3=End F4=Return F7=Backward F8=Forward

Figure 21: SELECT LUs FOR OPT. Panel (OTTOM14)

Use the SELECT LUs FOR OPT. panel to select one or more LUs for inclusion in optimization when CICS OTTO is started SELECTIVELY. LUs that are already currently or permanently selected will also be displayed on this panel.

Using the Panel

1. To select an LU, enter the LU name in the SELECT LU field (generic notation is allowed). To select this LU permanently, enter YES in the PERMANENT field (the default value is NO).
2. Press <ENTER>. The LU name should appear on the list of selected LUs. The displayed LUs are sorted by name.
3. To remove a selected LU from optimization temporarily, enter YES in the UNSELECT TEMP. column for the specific LU and press <ENTER>. Because this is a temporary removal, the LU is selected again effective with the next system start up.

4. To remove a selected LU from optimization permanently, enter YES in the UNSELECT PERM. column for the specific LU. Press <ENTER> and the LU is removed from the list of selected LUs.

Fields

<i>SELECT LU</i>	Enter the name of the LU to be included in optimization when CICS OTTO is SELECTIVELY STARTED.
<i>PERMANENT</i>	To select an LU for inclusion temporarily, enter NO. A temporarily selected LU becomes excluded effective with the next system startup. The default is NO. To select an LU for permanent inclusion, enter YES. A permanently selected LU remains selected effective with each system startup.
<i>ENTRIES</i>	Displays the number of selected LUs that may be viewed on the panel.
<i>LU Columns</i>	Displays the name of LUs that are included in optimization when CICS OTTO is SELECTIVELY STARTED.
<i>SELECT Columns</i>	Indicates with a YES or a NO whether the LU is selected temporarily or permanently for inclusion in selective optimization.
<i>UNSELECT Columns</i>	To temporarily remove an LU from inclusion in optimization, enter YES in the TEMP. column. The LU will again be optimized with the next system startup. To permanently remove an LU from inclusion in optimization, enter YES in the PERM. column. The LU is removed from the list of selected LUs.

This page intentionally left blank.

CHAPTER 13: TRACE CONTROL

Traces can be produced before and after each optimization for LUs and modules. Traces may be useful for error determination. For example, if you see general statistics or error statistics that require extended evaluation, you should use a trace.

There are two types of tracing techniques:

1. *Message traces* (option 1 on the panel) for inbound and outbound data streams are written to an output file identified by DDNAME OTTOTRCS. Internal traces (option 2) collect the same information as a message trace and write it to the same SYSOUT. An internal trace also collects internal information about CICS OTTO control blocks and CICS control blocks that might be useful for trouble shooting. For a complete description of the SYSOUT and the message return codes, see "Appendix D: Interpreting Message Trace DD Output" on page 121.
2. *Instorage traces* use a CICS OTTO storage area in which the trace records are saved for viewing online via the Display Instorage Trace option of the TRACE CONTROL panel. The storage area is automatically allocated based on parameters that you define on the TRACE CONTROL panel.

13.1 Using the TRACE CONTROL Panel

The TRACE CONTROL panel is displayed when option 10 is entered on the PRIMARY OPTION MENU.

TRACE CONTROL	OTTO for CICS V1R2	OTTOM15
OPTION ===> _____	SELECT . . _	
1. Start Trace for . .	1. All 3270 LUs	
2. Start Internal Trace for . .	2. All 3600 LUs	
3. Start Instorage Trace for . .	3. All SCS Printers	
4. Stop Trace	4. Specific or Generic LU name	
5. Display Instorage Trace	5. Specific or Generic Module name	
6. Clear Trace Storage	6. All LUs	
7. Release Trace Storage		
8. Set Instorage Trace Parm		
LU(S)/MODULE(S)		
ID 01	PAGESIZE 60	TITLE
CHANGE CURRENT/PERM.	CURRENT/ PERM.	CURRENT/PERM.
WRAP AROUND _____	MAXNO _____	STOP ON ERROR _____
ERROR CODE(S) _____		
TRACE IS STARTED	INSTORAGE	SINCE 06-03-2006 09-44-34
FOR 3270 COMP.		Lines 5
WRAP NO /NO	MAXNO 100/ 100	STOP NO /NO
CODE N/A		Entries 128

F1=Help	F3=End	

Figure 22: TRACE CONTROL Panel (OTTOM15)

Use the TRACE CONTROL panel to define the characteristics of a trace and to control the trace. The following control options are provided.

1. Start Trace allows you to start a normal message trace for which the output is written to the data set defined by DDNAME OTTOTRCS. For a complete description of the SYSOUT and the message return codes, see "Appendix D: Interpreting Message Trace DD Output" on page 121.
2. Start Internal Trace starts an internal trace, which should only be performed if requested by your technical support representative. For more information, refer to "Appendix A: Troubleshooting".
3. Start Instorage Trace allocates an CICS OTTO storage area in which the traced records are saved. After stopping this trace, you can use option 5 to view the records. For a complete description of the online options and error codes, see "Viewing Data Stream Errors" beginning on page 74.
4. Stop Trace stops the trace that has been started using one of the above options. The trace is available for printing or viewing online depending on the type of trace. The trace file should be printed/reviewed before a new trace is started. Otherwise, the trace information previously written may be lost.
5. Display the inbound and outbound data stream messages produced by the instorage trace. See "Viewing Instorage Traces Online" on page 73.
6. Clear Trace Storage clears the storage area provided for capturing trace data.
7. Release Trace Storage frees up the trace storage area. Otherwise, the storage area is freed up at CICS OTTO shut down.
8. Set Instorage Trace Parms allows you to change the WRAP AROUND, MAXNO, and STOP ON ERROR parameters for an instorage trace without starting the trace itself.

Using the Panel

1. In the OPTION field, type the corresponding Trace Control option number (see the description provided above.).
2. For trace OPTION numbers 1, 2, or 3, you must also use the SELECT field to enter the LU or module selection number (1 through 6) for which the message should be traced. Note that if you choose numbers 4 or 5, the specific or generic LU or module name must be entered in the fields provided.
3. Enter the report characteristics in the ID, PAGESIZE, and TITLE fields as defined below in the Fields section for this panel.

4. If you want to change the defaults for the instorage allocation, enter PERMANENT or CURRENT settings for WRAP AROUND, MAXNO, STOP ON ERROR, and ERROR CODES. Changes to these parameters take effect when an instorage trace is started (option 3) or when option 8 is entered. The defaults are displayed on line 22. See the description of these fields below.
5. Press <ENTER> to start the trace. The TRACE IS STARTED FOR . . . message is displayed along with a timestamp for started SINCE.
6. To stop a normal trace or an instorage trace, type 4 in the OPTION field and press <ENTER>. The TRACE IS STOPPED message is displayed and the trace should be routed to the printer. Instorage traces can be viewed online.

Fields

LU(S)/MODULE(S)

Enter a name that is either specific, generic, or extended-generic. A specific name consists of 1 to 8 letters (A - Z), numeric (0 - 9), or national characters (below referred to as "valid" characters).

- A generic name consists of 1 to 7 valid characters with an asterisk appended. For example, a generic name ABC* represents all specific names that start with ABC.
- An extended-generic name consists of 1 to 8 valid characters, percent signs, and asterisks. At least one character must be different from an asterisk. In an extended-generic name, a percent sign (%) represents one valid character, and an asterisk represents a string of 0 to 8 valid characters.

The name that you enter is not translated to uppercase except your terminal is defined to CICS with Upper Case Translation.

See system options Terminal ID and Transaction ID on the SYSTEM OPTIONS panel on how CICS OTTO LU and module names are interpreted.

ID

A 2 byte numeric identifier. The default is 01.

PAGESIZE

The number of lines printed per page on the normal trace or internal trace reports, options 1 or 2 respectively. Valid input is a number from 1 to 99. The default is 60.

TITLE

A descriptive title that documents the purpose of the trace. It is printed on top of each page of the normal or internal trace reports, options 1 or 2 respectively. The values specified on the TRACE CONTROL panel are used to create a CICS OTTO command, which is processed internally. Since a command string may not exceed 80 characters, the specified TITLE string is ignored if it does not fit into the internal command area.

Lines

After a trace is started, the actual number of lines written to DDNAME OTTOTRCS. Valid only for trace options 1 or 2.

WRAP AROUND

When using the Instorage Trace option, use this field to indicate whether the trace storage area should wrap around. Wrapping simply means that CICS OTTO will overwrite the trace area starting from the top.

- YES** Allow the trace information to wrap around the reserved storage area.
- NO** Completely fill the allocated trace storage area. Message TRACE STARTED INS (xxx) is displayed in line 20 of the TRACE CONTROL panel. If xxx is MXN, the maximum number of trace entries has been saved. If xxx is SOS then there are no free slots. Refer to the description of the MAXNO field for further explanation. The default value is NO . The current and permanent values of this option are shown in line 22 of the TRACE CONTROL panel.
- To temporarily change the WRAP AROUND parameter, enter the new value in the CHANGE CURRENT column and press <ENTER>.
 - To permanently change the WRAP AROUND parameter, enter the new value in the CHANGE PERM. column and press <ENTER>. The new value becomes currently active and is saved in the control file for activation at the next CICS system startup.

MAXNO

Enter a number from 1 to 999 to define the size of the storage area reserved for an instorage trace. The current and permanent MAXNO values are shown in line 22. MAXNO multiplied by 2172 will give you the size of the area. At most, MAXNO trace entries can be saved. One entry uses 60 bytes plus a variable number of slots that are 256 bytes in size. At most 8*MAXNO slots can be used. The area is allocated the first time an instorage trace is started and resides in private storage above 16MB. The area is reused unless it is released by the user or the MAXNO value is increased. The starter value is 100 .

- To temporarily change the MAXNO parameter, enter the new value in the CHANGE CURRENT column and press <ENTER>.
- To permanently change the MAXNO parameter, enter the new value in the CHANGE PERM. column and press <ENTER>. The new value becomes currently active and is saved in the control file for activation at the next CICS system startup.

STOP ON ERROR

Controls whether the instorage trace should stop upon detection of a specific error code.

YES Stop the instorage trace when a predefined error code is found in a traced message.

NO The instorage trace must be explicitly stopped using option 4 on the trace panel. If the WRAP AROUND option is not used, the trace is stopped when the storage area is full.

For more information on error codes, refer to the description of the ERROR CODE(S) field below or refer to the ERROR STATISTICS panel. If the stop condition occurs, message TRACE STARTED INS (ERR) is displayed in line 20 of the TRACE CONTROL panel. The starter value is NO.

- To temporarily change the parameter, enter the new value in the CHANGE CURRENT column and press <ENTER>.
- To permanently change the parameter, enter the new value in the CHANGE PERM. column and press <ENTER>. The new value becomes currently active and is saved in the control file for activation at the next CICS system startup.

ERROR CODE(S)

Enter 1 to 3 error codes, which causes an instorage trace to stop if one of these error codes is detected in a traced message and option STOP ON ERROR has been set to YES. All previously defined error codes are removed and replaced by the new values. Error codes are not saved permanently. At CICS OTTO startup, there are no predefined error codes.

Error codes are specified as *I_{nn}* or *O_{nn}*, where *nn* represents two numeric digits. Furthermore, generic notation is allowed, i. e., you may enter *xn** or *x**, where *x* represents I or O, and *n* is a numeric digit.

For a complete list of error codes, see "Data Stream Error Codes" on page 80.

Entries

After a trace is started, the number of trace entries (before and after optimization) are displayed.

13.2 Viewing Instorage Traces Online

After starting and stopping an instorage trace, you can display the results online by selecting option 5 on the TRACE CONTROL panel. The DIAGNOSTICS OVERVIEW panel is displayed.

DIAGNOSTICS OVERVIEW		OTTO for CICS V1R2		OTTOM23
Option ===> _____				
Type (S)elect for details		Last LU	Last Module	Last Error Code

_ Outbound Data Stream Errors:	7	CP11	TESTECOD	O22
Inbound Data Stream Errors:	0			
_ All Data Streams traced :	25			

F1=Help	F3=End	F4=Return		

Figure 23: DIAGNOSTICS OVERVIEW Panel (OTTOM23)

The DIAGNOSTICS OVERVIEW panel displays an overview of the outbound and inbound data stream errors. Also displayed is the last terminal ID, last transaction ID, and last error code for each type of data stream for inbound or outbound errors, as well as an overview of all data streams that were traced.

Using the Panel

Place the cursor into the input field to the left of an overview type and enter **S** to view a detailed list of the specific inbound or outbound data stream errors, or all of data streams that were traced.

13.2.1 Viewing Data Stream Errors

After selecting a specific type of data stream errors, the following panel is displayed with the type of data stream that you selected. This figure uses outbound data stream errors for illustration.

```
OUTBOUND DATA STREAM ERRORS   OTTO for CICS V1R2                               OTTOM24
OPTION ====> _____                               Total entries:           7
-----
   Seq Code Description                               LU      Module  Dspl OR  Time
-----
  -   8 O11  INVALID MF                               CP11    TESTECOD 0005 MF 10-03-00
  -   9 O09  INVALID CHARACTER IN RA-ORDER          CP11    TESTECOD 006F RA 10-03-00
  -  10 O22  UNEXPECTED DBCS DATA                   CP11    TESTECOD 0071 SFE 10-03-00
  -  11 O22  UNEXPECTED DBCS DATA                   CP11    TESTECOD 0072 SFE 10-03-00
  -  12 O02  INVALID STRUCTURED FIELD                CP11    TESTECOD 0003 N/A 10-03-00
  -  13 O12  UNPAIRED SO/SI                           CP11    TESTECOD 0000 N/A 10-03-00
  -  14 O22  UNEXPECTED DBCS DATA                   CP11    TESTECOD 000A N/A 10-03-00
-----
F1=Help      F3=End      F4=Return    F7=Backward  F8=Forward
```

Figure 24: DATA STREAM ERRORS Panel (OTTOM24)

An overview of each inbound or outbound data stream is displayed along with details pertaining to the LU and module name, displacement, OR, and time.

Using the Panel

- Place the cursor into the input field to the left of an error code and enter **S** to see a detailed overview of a specific data stream error. The data stream buffer is displayed, see "Viewing Data Stream Buffer" on page 78.
- Use the option field to scroll to the top or bottom of the panel. To scroll to the top, enter an **M** and press PF7. To scroll to the bottom, enter an **M** and press PF8.

Columns

- Seq** Unique sequence number that CICS OTTO assigns to the data stream to be used as an easy reference number.
- Code** Indicates the error code assigned by CICS OTTO. See "Data Stream Error Codes" beginning on page 80 for a detailed description of each possible outbound and inbound data stream error.

Description	A short description of the error. See "Data Stream Error Codes" beginning on page 80 for a long description of each possible outbound and inbound data stream error.
LU / Module	Displays the LU name and module name.
Dspl	Shows the actual error displacement. If the actual displacement could not be determined or if a displacement is meaningless for this type of error, the value shown is FFFF.
OR	Displays the data stream order or N/A if not applicable.
Time	Displays the time in the format hh-mm-ss

13.2.2 Viewing All Traced Data Streams

After selecting the option to view "All data streams traced", the following panel is displayed with a complete listing of all data streams that were traced.

TRACE ENTRIES		OTTO for CICS V1R2					OTTOM24	
OPTION ====> _____							Total entries:	32
Seq	Dir	LU	Module	Bef	Aft	Time	Err	Data
1	Out	0113	OTTOMC00	1454	276	08-38-54		F5C311C37D131140401DE8E3
2	In	0113	OTTO	590	0	08-38-55		F3C37D11C1D196A3A3964086
3	Out	0113	OTTOMC00	1487	766	08-38-55		F5C311C37D131140401DE8D7
4	In	0113	OTTO	183	0	08-38-56		F3C37D11C1D196A3A3964086
5	Out	0113	OTTOMC00	81	54	08-38-56		F5C35C405C405C4040404040
6	In	0113	UNKNOWN	82	0	08-39-00		7D40C5858396844040404040
7	Out	0113	TESTECOD	112	98	08-39-01		F5C31DF100F1F2F31DF00000
8	Out	0113	TESTECOD	10	0	08-39-01	O11	F1C31140C32C01C0F000
9	Out	0113	TESTECOD	116	0	08-39-01	O09	F5C31DF100F1F2F31DF00000
10	Out	0113	TESTECOD	124	0	08-39-01	O22	F5C3C1C21DF100F1F2F31DF0
11	Out	0113	TESTECOD	126	0	08-39-01	O03	F5C332C11DF100F1F2F31DF0
12	Out	0113	TESTECOD	11	11	08-39-01	O02	F3000A0240404040404040
13	Out	0113	TESTECOD	14	0	08-39-01	O12	F5C31DF0000000001DF04040
14	Out	0113	TESTECOD	16	0	08-39-01	O22	F5C31DF0000000001DF00E40
15	In	0113	UNKNOWN	129	129	08-39-17		880017818101000050003001

F1=Help F3=End F4=Return F7=Backward F8=Forward

Figure 25: TRACE ENTRIES Panel (OTTOM24)

Along with an overview of all data streams that were traced, the decimal lengths before and after optimization are shown as well as any errors that might have been determined.

Using the Panel

- Place the cursor into the input field to the left of an error code and enter **S** to see a detailed overview of a specific data stream error as illustrated below on the DATA STREAM DISPLAY panel.
- Use the option field to scroll to the top or bottom of the panel. To scroll to the top, enter an **M** and press PF7. To scroll to the bottom, enter an **M** and press PF8.

Columns

- Seq** Unique sequence number that CICS OTTO assigns to the data stream to be used as an easy reference number.
- Dir** Indicates whether the data stream's direction was inbound or outbound.
- LU / Module** Displays the LU name and module name.

<i>Bef / Aft</i>	Shows the decimal length of the data stream before and after optimization.
<i>Time</i>	Displays the time in the format hh-mm-ss.
<i>Err</i>	Displays the error, if one exists. All possible error inbound and outbound error codes are listed in the section entitled "Data Stream Error Codes" beginning on page 80.
<i>Data</i>	Displays the first characters of the data stream. Drill down using line command S to see the entire data stream.

Error	Indicates the error code that was incurred along with a short description. See "Data Stream Error Codes" beginning on page 80 for a detailed description of each possible outbound and inbound data stream error.
Date / Time	Displays the last date and time for which the error was encountered. The date format depends on your site-specific date setting. The time format is HH-MM-SS.
PID / PSize	Displays the partition ID and the partition size
DIR	Indicates the direction of the data stream, either inbound or outbound.
Displ	Shows the actual error displacement. Note: if the actual displacement could not be determined or if a displacement is meaningless for this type of error, the value shown is FFFF.
Seq	Unique sequence number that CICS OTTO assigns to the data stream to be used as an easy reference number.

13.2.4 Data Stream Error Codes

This section documents the data stream error codes. The format of an error code is:

xnm where: *x* = I for inbound
 O for outbound

nm = 2 digit error number

Table 2: Outbound Data Stream Errors (Instorage Trace)

Error Code	Outbound Instorage Message Description
O01	Truncated parameter list. An outbound data stream ended with an incomplete 3270 order.
O02	Invalid structured field. An unknown or invalid structured field was detected.
O03	Invalid data stream order. An invalid 3270 data stream order was detected. If this was an SCS Printer data stream, then an invalid set function, MPP, left and right margins, or horizontal tab were specified.
O04	Invalid address. An invalid buffer address was detected in an EUA, RA, or SBA order. One of the following conditions was found: <ul style="list-style-type: none"> • Address unknown • Address larger than the current device buffer size
O05	Invalid attribute type. An invalid attribute type was detected in an MF, SA, or SFE order. Valid attribute types are <ul style="list-style-type: none"> • 3270 Field Attributes • Extended Highlighting • Extended Color • Character Set • Field Outlining • Background Transparency • Field Validation
O06	Invalid attribute value. An invalid attribute value was found for an attribute type other than Character Set in an MF, SA, or SFE order.
O07	Invalid graphic escape character. An invalid GE (Graphic Escape) order was detected. Valid values are: X'40' to X'FE'.
O08	Invalid command code.
O09	Invalid repeat character. An invalid repeat character was specified for an RA (Repeat-to-Address) order. The valid repeat characters are: X'00' and, X'40' to X'FE'.

Error Code	Outbound Instorage Message Description
O10	Invalid reply mode in a Set Reply Mode structured field. An invalid Reply Mode was detected in the SRM (Set Reply Mode) structured field. Valid Reply Modes are <ul style="list-style-type: none"> • Field • Extended Field • Character
O11	Target of a modify field is not an attribute. The target of a MF order must be an attribute byte. In this case, the target was not an attribute byte.
O12	Invalid Shift Out/Shift In pairing. A Shift Out/Shift In (SO/SI) pair was detected that is invalid or incomplete. The SO and SI orders must appear as pairs in the terminal buffer.
O13	Invalid structured field length. A structured field was present in the outbound data stream which was longer than the remaining length of the data stream.
O14	Invalid LCID in a Load Programmed Symbols structured field. An invalid LCID was detected in a LPS (load programmed symbol) structured field. Valid values for the LCID are: X'40' to X'EF'.
O15	Invalid RWS in a Load Programmed Symbols structured field. An invalid RWS (Read/Write Store) was detected in a LPS (Load Programmed Symbol) structured field. Valid values for the RWS are: X'02' to X'0B'.
O16	Load Programmed Symbols beginning code point invalid. The beginning code point of a LPS (Load Programmed Symbol) must be in the range from X'41' to X'FE'.
O17	Load Programmed Symbols data exceeds RWS limit. The programmed symbol (PS) data which started at the specified beginning code point in the PS set RWS (Read/Write Store) has overflowed. It has exceeded the maximum code point allowed for that RWS.
O18	Invalid character set. An invalid LCID was found in the attribute value field of an attribute type Character Set (programmed symbols) in an MF, SA, or SFE order. This value must be: X'00' or X'40' to X'FE'.
O19	Invalid DBCS sub-field. A DBCS sub-field was detected that has an odd number of bytes . This is usually found in conjunction with SO/SI orders.
O20	Invalid DBCS field. A DBCS field was detected that has an odd number of bytes .
O21	Invalid DBCS character. An invalid DBCS character was detected. Valid DBCS characters are: X'4040' to X'FEFE'.
O22	Unexpected DBCS data. This is usually found if the CICS OTTO DBCS Option is not set and DBCS data is to be written to the screen. Switch the CICS OTTO DBCS Option "on" to avoid this error code.

Table 3: Inbound Data Stream Errors (Instorage Trace)

Error Code	Inbound Instorage Message Description
I01	Truncated parameter list. An inbound data stream ended with an incomplete 3270 order.
I02	Invalid structured field. An unknown or invalid structured field was detected.
I03	<p>Invalid data stream order. An invalid 3270 data stream order was detected when</p> <ul style="list-style-type: none"> • an order other than SF SFE SBA GE or SA is detected • any other invalid data (lower than X'40') is detected
I04	<p>Invalid address. An invalid buffer address was detected in a SBA order or computed from the position of a SF(E) order. One of the following conditions was found:</p> <ul style="list-style-type: none"> • address unknown • address larger than the current device buffer size • a SBA or SF(E) order does not correspond to a field on the screen.
I05	<p>Invalid attribute type. An invalid attribute type was detected in an MF, SA, or SFE order. Valid attribute types are</p> <ul style="list-style-type: none"> • 3270 Field Attributes • Extended Highlighting • Extended Color • Character Set • Field Outlining • Background Transparency • Field Validation
I06	Invalid attribute value. An invalid attribute value was found for an attribute type other than Character Set in a SA or SFE order.
I07	Invalid graphic escape character. An invalid Graphic Escape (GE) order was detected. Valid values are: X'40' to X'FE'.
I08	Unknown AID in inbound data stream
I09	Data stream field longer than image field. A field was present in the inbound data stream that was longer than the field that was last sent to the screen at that location.
I10	Data stream contains both SF and SBA. An inbound data stream contains both Start Field and Set Buffer Address orders. This is not valid for inbound data streams.

I11	SBA found but not at start of data. An SBA at the beginning of the inbound data stream indicates a formatted ReadModified (RM) data stream. If no SBA is present at the beginning of the data stream, the data stream is unformatted and cannot contain other SBA orders.
I12	Unmodifiable field in Read Modified. A field that is protected and not pre-modified or Select Pen Detectable has been found in the inbound data stream. This cannot occur with a valid 3270 device.
I13	Structured field longer than data stream. A structured field length is larger than the remaining length of the data stream.
I14	Incomplete Read Buffer. A Read Buffer (RB) data stream was found to be too short (not all data was read from the buffer) or too long (more data was read than the buffer should contain).
I15	Data stream protected field differs from image field. An inbound field which is protected has been changed since the data was last sent to the screen. This is not possible with a valid 3270 device.
I16	Data stream protected field shorter than image field. A field was found in the inbound data stream which was shorter than the field last sent to the device. This is not valid if the field is protected.
I17	Query reply descriptor length invalid. The Descriptor Length in the Character Sets or Graphic Symbol Set query reply was invalid or zero.
I18	Invalid character set. An invalid LCID was found in the attribute value field of an attribute type CharacterSet (programmed symbols) in an MF, SA, or SFE order. This value must be X'00' or X'40' to X'FE'.
I19	Data stream SBA out of sequence. An SBA was encountered in the inbound data stream whose address was less than the address of the preceding SBA. This is not valid for inbound data streams unless the address is zero (X'4040')
I20	SFE without basic attribute in an inbound data stream which is the result of a Read Buffer. This cannot occur with a valid 3270 device.
I21	Unprotected field too long in an inbound data stream which is the result of a Read Buffer. The incoming field is longer than the outgoing field which cannot occur with a valid 3270 device.
I22	Unexpected DBCS data. This is usually found if the CICS OTTO DBCS Option is not set and DBCS data is to be written to the screen. Switch the CICS OTTO DBCS Option "on" to avoid this error code.

I23	Protected field MDT on with hex nulls between data. A so called pre-modified protected field is usually used by a programmer to save data on the screen, which is returned with the next inbound message. If this field contains hex nulls between data, the incoming field is shorter than the outgoing field because hex nulls are not transmitted from a 3270 device in a Read Modified. Therefore, the incoming data cannot be mapped in the same way as the outgoing data and processing may fail.
I24	Expected inbound data is missing.

CHAPTER 14: OPTIMIZATION STATISTICS

Optimization results can be viewed and analyzed using CICS OTTO's statistics. These statistics show how many messages have been optimized and how many bytes have been saved during the optimization process. If CICS OTTO is fully started, all messages are counted except those for which an LU or module exclusion was active. If CICS OTTO is selectively started, only the messages destined to the specific LUs which are in CICS OTTO's selection list are counted.

CICS OTTO statistics may be found using the following sources:

- Viewed using the CICS panels as described in this chapter.
- Written to the OTTOSTAT file for printing on demand.
- At shutdown time of the TP system, statistics are automatically written to the OTTOSTAT file for printing.

Note: If DDNAME OTTOSTAT is missing, the statistics are written to the system log.

For space allocation information regarding the OTTOSTAT file under z/OS, see the "Runtime Considerations" on page 16.

14.1 Types of Optimization Statistics

The following different kinds of optimization statistics are provided.

14.1.1 Overall Statistics

Overall statistics provide a graphical summary of all optimization results for all LUs; 3270, SCS and 3600. This information is provided only online.

14.1.2 Component Based Statistics

Component based statistics show counters for message optimization and saved bytes, as well as total reduction expressed as a percentage. For the 3270 component, these statistics are separated by terminal statistics (T3270) and printer statistics (P3270).

14.1.3 LU Based Statistics

LU based statistics are always active. However, these are available only online. Statistical information can be obtained for a single LU, for a group of LUs qualified by a generic name, or different LU types.

14.1.4 Module Based Statistics

An option allows accumulation of module statistics the same as it does for LUs. The module name is either the CICS program name or the CICS transaction ID (see option "Transaction ID" on the SYSTEM OPTIONS panel). Module based statistics are available only if they have been explicitly activated.

Module statistics should only be used to figure out modules/transactions that have a low optimization ratio. Module statistics cause CPU overhead. Therefore, you may wish to exclude modules with a low optimization ratio. Statistical data may be collected for a list of pre-defined modules by starting the module statistics **selectively** or for all modules by starting them **fully**.

To reduce the amount of main storage used by module statistics, the number of entries for the module statistics list may be restricted using the MODULE STATISTICS SIZE panel.

The module statistics may be displayed online for single modules or for a group of modules qualified by a generic name. At shutdown time of the TP system, a list is written that contains all modules for which statistical information has been saved. The statistics output is self explanatory.

Warning: Information about which transactions are working with a WRITE/SAVE (marked with '* W/S *' in the statistical output) is provided when the module statistics are written at shutdown time. These applications **must be excluded** from optimization because they are normally using the same TIOA for every WRITE. Because CICS OTTO changes the length field after the optimization process, these applications in conjunction with optimization may cause scrambled terminal output.

14.2 Error Statistics

Inbound and outbound data stream errors are recorded. The number of data streams in which an error was detected is displayed, as well as information on the terminal for which the error most recently occurred. Such information includes date, time, LU/module name, partition ID (hex) and size, as well as displacement of the error in the data stream, and failing 3270 order or data.

14.3 Statistics Control

The STATISTICS CONTROL menu is displayed when option 12 is entered on the PRIMARY OPTION MENU.

```
STATISTICS CONTROL          OTTO for CICS V1R2          OTTOM17

OPTION ===> _____
      1. Clear OTTO for CICS Image Pool Statistics
      2. Clear all LU and Module Statistic Values
      3. Clear all LU Statistic Values
      4. Clear all Module Statistic Values
      5. Clear all 3270 Statistic Values
      6. Clear 3270 Terminal Statistic Values
      7. Clear 3270 Printer Statistic Values
      8. Clear 3600 Statistic Values
      9. Clear SCS Statistic Values
     10. Clear Statistics of Specific LU           LU . . . . _____
     11. Clear Statistics of Specific Module      MODULE . . _____
     12. Start Module Statistics for all Modules
     13. Start Module Statistics for Selected Modules
     14. Stop Module Statistics
     15. Exclude Modules from Statistics
     16. Select Modules for Statistics
     17. Control Size of Control Blocks for Module Statistics
     18. Clear Error Statistics

-----
F1=Help      F3=End
```

Figure 27: STATISTICS CONTROL Panel (OTTOM17)

Use the STATISTICS CONTROL panel to issue commands and define variables that control the statistical information that is gathered. Such controls include:

- Clearing statistics. This means set all counters to zero.
- Starting statistics for all or specific modules.
- Stopping module statistics.
- Selecting modules for the statistics.

- Excluding modules from the statistics.
- Changing the restricted size of the module statistics in main storage.

Using the Panel

In the OPTION field, enter one of the following statistical options:

Enter: To do this:

- | | |
|----|---|
| 1 | Clear the image pool statistics. |
| 2 | Clear all terminal statistics (3270, SCS, and 3600) <u>and</u> all module statistics. |
| 3 | Clear all LU statistics. |
| 4 | Clear all module statistics. |
| 5 | Clear statistics for all 3270 terminals and printers - component 3270. |
| 6 | Clear statistics for all 3270 terminals. |
| 7 | Clear statistics for all 3270 printers. |
| 8 | Clear statistics for all 3600 terminals - component 3600. |
| 9 | Issue a command that clears statistics for all SCS printers - component SCS. |
| 10 | Issue a command that clears statistics for a specific terminal or a group of terminals by entering a fully qualified or generic LU name in the LU-NAME field. If the LU-NAME field is left blank, the CLEAR LU STATISTICS panel displays a list of all active LUs where one or more LUs can be selected for resetting statistics. |
| 11 | Issue a command that clears statistics for a specific module or group of modules by entering of a fully qualified or generic group name in the MODULE field. If the MODULE field is left blank, the CLEAR MODULE STATISTICS panel displays a modules list from which a module can be selected for resetting statistics. |
| 12 | Issue a command that starts CICS OTTO's statistics for all modules (<i>fully</i>). This means the statistics of all modules should be saved, except for those modules which are excluded from statistics . |

To exclude modules from statistics, use option 15 below.

- 13** Issue a command that starts CICS OTTO's statistics for selected modules (*selectively*). That means the statistics should be saved only for those modules which are selected for statistics.
- To select modules for statistics, use option 16 below.
- 14** Issue a command that stops CICS OTTO's statistics for modules.
- 15** Exclude modules from statistics. The EXCL. MOD'S FROM STATISTICS panel is displayed on which you can define the modules to be excluded from accumulating statistics, see "Excluding Modules from Statistics" on page 90.
- 16** Define modules for selective gathering of statistics using command 13. The SEL. MOD'S for STATISTICS panel is displayed, see "Selecting Modules for Statistics" on page 91.
- 17** Change size of control blocks for module statistics. The MODULE STATISTICS SIZE panel is displayed, see "Controlling Module Statistics Size" on page 92.
- 18** Clear the error statistics.

14.3.1 Excluding Modules from Statistics

The EXCL. MODS FROM STATISTICS panel is displayed when option 15 is entered on the STATISTICS CONTROL menu.

EXCL. MODS FROM STATISTICS										OTTO for CICS V1R2		OTTOM14	
OPTION ==>		EXCLUDE MODULE				ENTRIES		PERMANENT . NO		1 TO 2 OF 2			
MODULE	EXCLUDE		INCLUDE		MODULE	EXCLUDE		INCLUDE					
	temp.	perm.	temp.	perm.		temp.	perm.	temp.	perm.				
MOD00000	YES	YES	___	___	MOD00001	YES	YES	___	___				

F1=Help		F3=End		F4=Return		F7=Backward		F8=Forward					

Figure 28: EXCL. MODS FROM STATISTICS Panel (OTTOM14)

Use the EXCL. MODS FROM STATISTICS panel to:

1. Display a list of all modules which are excluded from CICS OTTO's statistics.
2. Exclude additional modules.
3. Remove modules from this exclusion list.

When the statistics are started for all modules using command 12 of the STATISTICS CONTROL menu, there are no statistics gathered for the modules on this exclusion list.

Modules can be excluded temporarily (PERMANENT field = NO) or permanently (if PERMANENT field = YES). Likewise, modules can be temporarily or permanently included into statistical processing.

Using the Panel

For details on how to use this panel, see "Excluding LUs" on page 61.

14.3.2 Selecting Modules for Statistics

The SEL. MODS FOR STATISTICS panel is displayed when option **16** is entered on the STATISTICS CONTROL panel.

SEL. MODS FOR STATISTICS				OTTO for CICS V1R2				OTTOM14			
OPTION ==> _____				SELECT MODULE				PERMANENT . NO			
				ENTRIES				1 TO 2 OF 2			
MODULE	SELECT		UNSELECT		MODULE	SELECT		UNSELECT			
	temp.	perm.	temp.	perm.		temp.	perm.	temp.	perm.		
C*	YES	YES	___	___	OTTO*	YES	YES	___	___		

F1=Help F3=End F7=Backward F8=Forward F4=Return

Figure 29: SEL. MODS FOR STATISTICS Panel (OTTOM14)

Use the SEL. MOD'S FOR STATISTICS panel to display all modules defined for selective collection of module statistics, to define new modules for selection, and to remove modules from selection. When module statistics are selectively started using command 13 of the STATISTICS CONTROL menu, statistics are gathered only for the modules on this list.

Modules can be selected temporarily (PERMANENT field = NO) or permanently (if PERMANENT field = YES). Likewise, modules can be temporarily or permanently be removed from selection.

Using the Panel

For details on how to use this panel, see "Selective LU Inclusion" on page 64.

14.3.3 Controlling Module Statistics Size

The MODULE STATISTICS SIZE panel is displayed when option 17 is entered on the STATISTICS CONTROL menu.

```
MODULE STATISTICS SIZE          OTTO for CICS V1R2          OTTOM18

OPTION ===> _____

                CURRENT CONTROL BLOCK VALUES
                -----
Total control block size in KB . . . :          10
Number of entries generated . . . . :          232
Number of entries used . . . . . :             4

                CURRENT      PERM.      CHANGE CURRENT      CHANGE PERM.
                -----      -----      -----      -----
Restricted size          YES          YES          _____          _____
Size in KB                10          10          _____          _____
Max number entries       232          232          _____          _____
Status of statistics     STOPPED      STOPPED      -                -

-----
F1=Help   F3=End   F4=Return
```

Figure 30: MODULE STATISTICS SIZE Panel (OTTOM18)

Use the MODULE STATISTICS SIZE panel to restrict the size of main storage that is used for saving module statistics. CICS OTTO starts module statistics for 100 modules (5 KB). This number is increased dynamically whenever necessary, without any restrictions. If no storage is available for the module statistics list, an informational message is displayed at startup time.

The section of this panel called CURRENT CONTROL BLOCK VALUES reflects the actual current usage of main storage that is allocated for module statistics. If you enter storage restrictions that are intended to reduce the allocated amount, this reduction is reflected following the next system startup.

Restriction to the main storage used for module statistics can be made in one of the following two ways:

1. Restrict the storage size for the module statistics directly in KB.
2. Restrict the number of entries to be kept.

Note: The length of one entry needed for one module is 44 bytes.

Using the Panel

To restrict the main storage size for the module statistics, follow these steps:

1. Enter **YES** in the Restricted size field for either the CHANGE CURRENT or CHANGE PERM. columns.
2. Enter the size in KB or the maximum number of entries you want to keep (KB size has priority over maximum number of entries). These size restrictions can be entered in either the CHANGE CURRENT or CHANGE PERM. columns.
3. If you want to remove restrictions, enter **NO** in the Restricted size field of the CHANGE CURRENT or CHANGE PERM. columns.

Fields

Total control block size in KB	The current allocation in KB.
Number of entries generated	Maximum number of modules for the size above.
Number of entries used	Current number of modules saving statistics.
Restricted size	NO indicates that there is no restriction of the amount of main storage used for module statistics. Enter YES along with either the size in KB or number of entries to restrict storage.
Size in KB	The main storage restriction size in KB.
Max number of entries	The maximum number of modules for which statistics are to be saved.
CHANGE CURRENT Column	If the restriction is applicable only for this system startup, enter the current restriction values in this column. For <i>Status of statistics</i> , you must enter 1, 2, or 3 to start module statistics fully or selectively, or to stop module statistics. At the next system startup, the values reflected in the CURRENT column are the same as the values in the PERM. column.
CHANGE PERM. Column	If the restriction is applicable on a permanent basis, enter the restriction values in this column. For <i>Status of statistics</i> , you must enter 1, 2, or 3 to start module statistics fully or selectively, or to stop module statistics. Both CURRENT and PERM. restrictions are updated.
Status of statistics	Shows the current and permanent status of the module statistics, which can be either FULL, SELECTED, or STOPPED.

14.4 Displaying Statistics

Statistics can be accessed using the DISPLAY STATISTICS MENU. This menu is displayed when option **13** is entered on the PRIMARY OPTION MENU.

```
DISPLAY STATISTICS MENU          OTTO for CICS V1R2          OTTOM19

OPTION ====> _____

      1. Display LU Statistics Summary
      2. Display 3270 Statistics
      3. Display 3270 Terminal Statistics
      4. Display 3270 Printer statistics
      5. Display 3600 Statistics
      6. Display SCS Statistics
      7. Display Statistics of Specific 3270 Terminal(s) . . . _____
      8. Display Statistics of Specific 3270 Printer(s) . . . _____
      9. Display Statistics of Specific 3600 Terminal(s) . . . _____
     10. Display Statistics of Specific SCS Printer(s) . . . _____
     11. Display Statistics of Specific Module(s) . . . . . _____
     12. Display Error Statistics I(n) O(ut) A(11) . . . . .

-----
F1=Help      F3=End
```

Figure 31: DISPLAY STATISTICS MENU (OTTOM19)

Use the DISPLAY STATISTICS MENU to select options that are available for displaying the statistics for components, LUs, and modules.

On each of the statistics panels, use function key <F9> to write all statistics to the OTTOSTAT file for printing. One of two things will happen:

1. Statistics are written to the statistics file, or
2. Statistics are written to the console. This happens in the event no statistics file exists (i.e., no DD statement).

Using the Panel

In the OPTION field, enter one of the following display options:

Enter: **To do this:**

- 1 Display a summary of LU statistics presented in graphical representations of reduction percentages, see section 14.4.1 for details.
- 2 Display 3270 statistics, see section 14.4.2 for details.
- 3 Display 3270 terminal statistics, see section 14.4.2 for details.

- 4 Display 3270 printer statistics, see section 14.4.2 for details.
- 5 Display 3600 statistics, see section 14.4.2 for more details.
- 6 Display SCS statistics, see section 14.4.2 for details.
- 7 Display statistics for specific 3270 terminals. The specific or generic terminal ID must be typed in the field provided, see section 14.4.3 for details.
- 8 Display statistics for specific 3270 printers. The specific or generic printer ID must be typed in the field provided, see section 14.4.3 for details.
- 9 Display statistics for specific 3600 terminals. The specific or generic terminal ID must be typed in the field provided, see section 14.4.3 for details.
- 10 Display statistics for specific SCS printers. The specific or generic SCS printer ID must be typed in the field provided, see section 14.4.3 for details.
- 11 Display statistics of specific modules. The specific or generic module name must be typed in the field provided, see section 14.4.4 for details.
- 12 Display error statistics for inbound and outbound data streams. Use the input field to specify whether inbound (I), outbound (O), or all (A) error statistics are displayed, see section 14.4.5 for details.

14.4.1 LU Statistics Summary

The LU STATISTICS SUMMARY panel is displayed when option 1 is entered on the DISPLAY STATISTICS MENU.

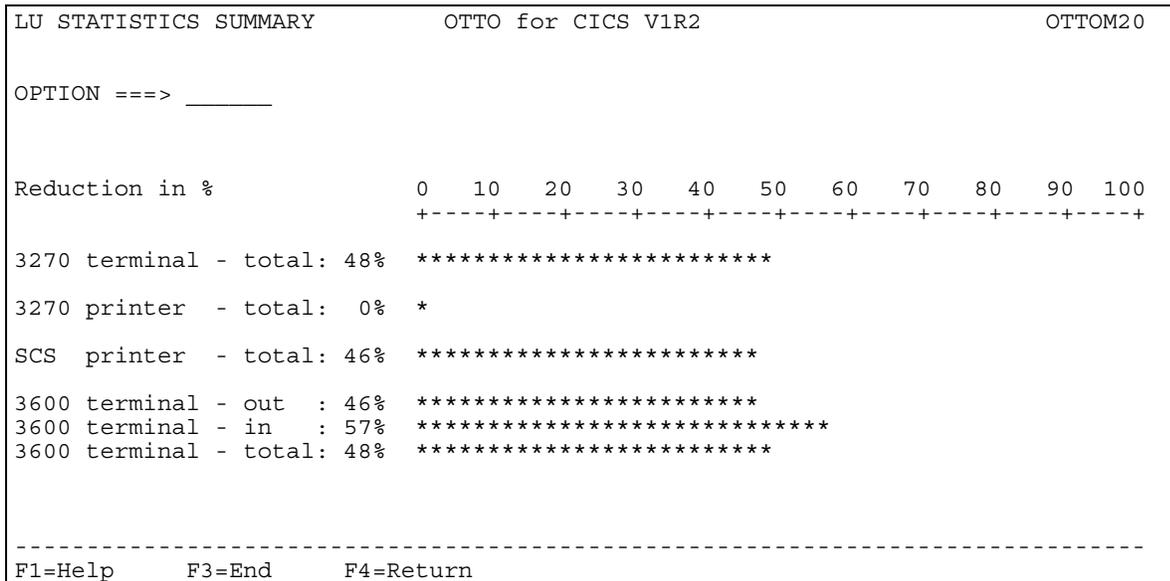


Figure 32: LU STATISTICS SUMMARY Panel (OTTOM20)

The LU STATISTICS SUMMARY panel graphically presents the optimization effect for the three component types; 3270, SCS, and 3600. The reduction per component is displayed in percent and graphically as a line with asterisks.

The 3270 component is split into the 2 parts: terminal (total) and 3270 printer (total). The 3600 component is split into 3 parts; terminal out, terminal in, and terminal total.

This summary information can only be viewed online and cannot be routed to a printer.

14.4.2 Component Statistics

The COMPONENT STATISTICS panel is displayed when one of the options 2 through 6 is entered on the DISPLAY STATISTICS MENU.

COMPONENT STATISTICS		OTTO for CICS V1R2		OTTOM21
OPTION ==> _____				
component statistics type here				
From	19-01-2006 08-45-32	to	***** *****	
		COUNT	OPTIMIZED	PERCENTAGE
Number of output messages . . :		121	112	92%
Number of input messages . . :		113	92	81%
		COUNT BEFORE	COUNT AFTER	REDUCTION
Number of output bytes . . . :		163.902	88.271	47%
Number of input bytes . . . :		27.939	11.893	58%
Total number of bytes . . . :		191.841	100.164	48%

F1=Help	F3=End	F4=Return	F9=Write Statistics to OTTOSTAT or Console	

Figure 33: COMPONENT STATISTICS Panel (OTTOM21)

The COMPONENT STATISTICS panel displays statistics for each component type as determined by the option number entered on the DISPLAY STATISTICS MENU. The component type is identified in the heading of this panel.

The measurement dates are identified in the From/to field. If the "to" field contains all asterisks, the component is still active.

Using the Panel

Press <F9> to write these statistics to an output file (or console if no output file is available) for printing.

Fields

NUMBER OF OUTPUT MESSAGES

COUNT - Total message counter sent from CICS.

OPTIMIZED - Total number of optimized messages.

PERCENTAGE - Percentage of savings. This number is calculated as: 'OPTIMIZED' divided by 'COUNT' and the quotient multiplied by 100.

NUMBER OF INPUT MESSAGES (only when sub-option 5 or sub-option 9 is used on the DISPLAY STATISTICS MENU)

COUNT - Total message counter received by CICS.

OPTIMIZED - Total number of optimized messages.

PERCENTAGE - Percentage of savings. This number is calculated as: 'OPTIMIZED' divided by 'COUNT' and the quotient multiplied by 100.

NUMBER OF OUTPUT BYTES

COUNT BEFORE - Total number of bytes of data that have been sent from CICS. This is the number of bytes that would have been transmitted if CICS OTTO was not active. The difference in this number and COUNT AFTER is the savings obtained from optimization.

COUNT AFTER - Total number of bytes of data actually transmitted to the LU(s) after the optimization. This number should be smaller than the previous number 'COUNT BEFORE'.

REDUCTION - Percentage of savings. This number is calculated as: 'COUNT BEFORE' minus 'COUNT AFTER', the result divided by 'COUNT BEFORE' and the quotient multiplied by 100.

NUMBER OF INPUT BYTES (only when sub-option 5 or sub-option 9 is used on the DISPLAY STATISTICS MENU)

COUNT BEFORE - Total number of bytes of data that have been passed to CICS, after inserting any fields set to ON when the screen was displayed. If Input Optimization (3600/4700 type terminals **only**) is ON, this is the number of bytes that would have been re-transmitted back from the LU(s) if CICS OTTO was not active.

COUNT AFTER - Total number of bytes of data transmitted from the LU(s) to CICS, prior to inserting any fields which had set on when the screen was displayed. If Input Optimization (3600/4700 type terminals **only**) is ON, this number should be smaller than 'COUNT BEFORE', else these two numbers will be equal. The difference in the two numbers is the number of bytes that did not have to be re-transmitted back from the LU(s).

REDUCTION - Percentage of savings. This number is calculated as: 'COUNT BEFORE' minus 'COUNT AFTER', the result divided by 'COUNT BEFORE' and the quotient multiplied by 100.

TOTAL NUMBER OF BYTES(only when sub-option 5 or sub-option 9 is used on the DISPLAY STATISTICS MENU)

COUNT BEFORE - Total number of bytes sent from CICS and received by CICS with CICS OTTO active.

COUNT AFTER - Total number of bytes that have actually been sent to the LU(s) and received from the LU(s), that is the total number of bytes really transmitted in both directions.

REDUCTION - Percentage of savings; it is calculated as: 'COUNT BEFORE' minus 'COUNT AFTER', the result divided by 'COUNT BEFORE' and the quotient multiplied by 100.

14.4.3 Statistics of a Specific LU

The LU STATISTICS panel is displayed when one of the options 7 through 10 is entered on the DISPLAY STATISTICS MENU and a specific or generic LU name was entered.

```
LU STATISTICS                OTTO for CICS V1R2                OTTOM21

OPTION ===> _____                DISPLAY CRITERIA . . . SET9

                Statistics for specific terminal(s)

From      19-01-2006 08-45-32    to ***** *****

                COUNT                OPTIMIZED                PERCENTAGE
-----
Number of output messages . . :                96                92                95%
Number of input messages . . :                92                85                92%

                COUNT BEFORE                COUNT AFTER                REDUCTION
-----
Number of output bytes . . . :                134.447                66.732                51%
Number of input bytes . . . :                28.764                10.729                63%
Total number of bytes . . . :                163.211                77.461                53%

-----
F1=Help      F3=End      F4=Return      F9=Write Statistics to OTTOSTAT or Console
```

Figure 34: LU STATISTICS Panel (OTTOM21)

The LU STATISTICS panel displays statistics for the specified LU(s). The LU(s) are identified in the DISPLAY CRITERIA field.

The measurement dates are identified in the From/to field. If the "to" field contains all asterisks, the LU(s) are still active.

Using the Panel

1. To display statistics for another specific LU, type the LU name in the DISPLAY CRITERIA field. This field may contain a specific name or (if it is a summary over chosen LUs) a generic LU name.
2. Press <F9> to write these statistics to an output file (or console if no output file is available) for printing.

Fields

See "Component Statistics" on page 97 for a description of the fields on this panel.

14.4.4 Module Statistics

The MODULE STATISTICS panel is displayed when option **11** is entered on the DISPLAY STATISTICS MENU and a specific or generic module name is entered.

MODULE STATISTICS		OTTO for CICS V1R2		OTTOM21
OPTION ==>	_____	DISPLAY CRITERIA . . . OTTO*		
Statistics for specific module(s)				
From	19-01-2006 10-11-27	to	*****	
		COUNT	OPTIMIZED	PERCENTAGE
Number of output messages . . :		44	44	100%
Number of input messages . . :		41	41	100%
		COUNT BEFORE	COUNT AFTER	REDUCTION
Number of output bytes . . . :		55.687	26.008	54%
Number of input bytes . . . :		9.119	473	95%
Total number of bytes . . . :		64.806	26.481	60%

F1=Help	F3=End	F4=Return	F9=Write Statistics to OTTOSTAT or Console	

Figure 35: MODULE STATISTICS Panel (OTTOM21)

The MODULE STATISTICS panel displays statistics for the specified module(s). The module name is identified in the DISPLAY CRITERIA field.

The measurement dates are identified in the From/to field. If the "to" field contains all asterisks, the module(s) are still active.

Using the Panel

1. To display statistics for another specific module or group, type the module name in the DISPLAY CRITERIA field. This field may contain a specific name or (if it is a summary over chosen modules) a generic module name.
2. Press <F9> to write these statistics to an output file (or console if no output file is available) for printing.

Fields

See "Component Statistics" on page 97 for a description of the fields on this panel.

14.4.5 Error Statistics

The ERROR STATISTICS panel is displayed when option **12** is entered on the DISPLAY STATISTICS menu. The panel shows a summary of inbound and outbound data stream errors that occurred since error statistics were cleared the last time (see option 18 on the STATISTICS CONTROL panel for details about clearing statistics).

ERROR STATISTICS										OTTO for CICS V1R2			OTTOM26				
OPTION ==> _____										I(n) O(ut) A(11) _			Entries 41 to 45 of 45 MORE: -				
All Data Stream Errors																	
Code	Last Date	Time	Count	LU	Module	PI	PSize	Dspl	OR/Fld								
I19			0														
	SBA OUT OF SEQUENCE																
I20			0														
	SFE WITHOUT BASIC ATTRIBUTE																
I21	08-03-2006	16-14-54	13	0113	TE10004	00	1920	0515	000000								
	UNPROT. FIELD TOO LONG (RB)																
I22			0														
	N/A																
I23			0														
	N/A																
							Total Errors :			13							
										BOTTOM							

F1=Help			F3=End			F4=Return			F7=Backward			F8=Forward			F9=Print		

Figure 36: ERROR STATISTICS Panel (OTTOM26)

The ERROR STATISTICS panel displays an overview of all possible errors. This figure uses inbound errors for illustration. The number of data streams (count) in which an error was detected is displayed, as well as information on the terminal for which the error most recently occurred. Such information includes date, time, LU/module name, partition ID (hexadecimal) and size (decimal), along with the displacement of the error in data stream (hexadecimal), and failing 3270 order or data. A short description of the error code is also shown.

To more closely evaluate a specific type of error, use the Instorage Trace option. For more about tracing and to see a complete listing of all error codes and their description, see "Viewing Data Stream Errors" on page 80.

Using the Panel

- To change the filtering of the error statistics displayed on the panel, enter **I**, **O**, or **A**.
- Press F9 on the ERROR STATISTICS panel to write statistics to CICS OTTO file called OTTOSTAT or to the system log.
- Press F3 on the ERROR STATISTICS panel to return to the previous panel.
- Press F4 to return to the PRIMARY OPTION MENU.

- Press F7 and F8 to scroll backwards and forwards through the error list.

Columns

Code	Indicates the error code that was incurred along with a short description. See "Data Stream Error Codes" beginning on page 80 for a detailed description of each possible outbound and inbound data stream error.
Last Date / Time	Displays the last date and time for which the error was encountered. The date format depends on your site-specific date setting. The time format is HH-MM-SS.
Count	The number of times this error was encountered.
LU / Module	Displays the LU name and module name for which the error was most recently encountered.
PI / PSize	Displays the partition ID and the partition size.
Dspl	Shows the actual error displacement. Note: if the actual displacement could not be determined or if a displacement is meaningless for this type of error, the value shown is FFFF.
OR/Fld	Displays the data stream order or data field for which the error was detected. The column may contain an order or just a data field.

CHAPTER 15: COMPATIBILITY MODE

Generally, CICS OTTO's interactive menus and panels allow you to control all optimization features as documented in this *CICS OTTO User's Guide*. There is an exception: you will be asked to use native commands if you need to reload a module after applying a PTF, or for some type of error determination. If such instances occur, your technical support representative will provide instructions.

Alternatively, the CICS OTTO native commands are also supported via the so-called Compatibility Mode. This Compatibility Mode allows you to use these native commands instead of the online interactive panels. In the event you want to use CICS OTTO's native commands, enter the Compatibility Mode by selecting option **14** on the PRIMARY OPTION MENU.

Note: For details on how to use CICS OTTO native language via the Compatibility Mode, refer to the *CICS Online Transmission Time Optimizer Compatibility Mode Guide*.

When entering the Compatibility Mode for the first time, all command execution routines are loaded into the main storage. These routines stay permanently in main storage while the TP system is active.

To return from the Compatibility Mode to the PRIMARY OPTION MENU, press the <F3> function key or CLEAR key.

This page intentionally left blank.

CHAPTER 16: BATCH UTILITIES

This chapter explains the following batch utilities:

- ABLMAIN to print options and settings.
- ABLBAT to set optimization options in batch.
- ABLCONV to copy existing optimization options to the control file of a new release.

16.1 ABLMAIN Print Utility

ABLMAIN, the CICS OTTO print utility, can be used to print the permanent optimization settings maintained on the VSAM command file, which is defined by the OTTOCMD DD statement .

The JCL required to run the print utility is delivered within the sample JCL member also called ABLMAIN.

16.1.1 Control Statement Overview

The following rules must be followed when entering ABLMAIN control statements:

- Each input card must contain a valid command unless it is a continuation card or a comment card.
- Comment cards are identified by an asterisk in column 1.
- The command and possible keywords may appear in any column.
- Continuation cards are assumed unless all required keywords are entered.
- The card may be filled including column 72.
- The command and the keyword(s) must be separated from each other by one or more blanks.
- The keywords can be entered in any sequence.

The general card format is:

```
COMMAND KEYWORD1 KEYWORD2 . . KEYWORDn-1 KEYWORDn
```

Command and keyword defaults are printed in bold type in the following command overview and the minimum abbreviations are underlined.

Table 4: ABLMAIN Print Utility Command

Command	Keyword 1	Keyword 2	Keyword 3	Keyword 4	Keyword 5
PRINT	<u>SETTINGS</u>				
	<u>OPTIONS</u>	ALL <u>SYSTEM</u> 3270 SCS 3600 MOD LU			
	<u>EXCLUSION</u>	ALL LU MOD <u>MODSTAT</u>			
	<u>SELECTION</u>	ALL LU <u>MODSTAT</u>			

The PRINT command lists all permanent settings made to the command file OTTOCMD.

PRINT keywords	Description
<u>SETTINGS</u>	Prints all options as well as the exclusion and selection lists.
<u>OPTIONS</u>	Prints various options depending on the 2nd keyword: ALL system, component and LU based options SYSTEM system-wide valid options like APPLID, date formatting, user exit, pool size, etc. 3270 component based options like optimization level, start option, request unit size, etc. SCS component based options like start option, line size, etc. 3600 component based options like start option, prime character, etc. LU LU based options like optimization level, start option, line size, prime character, etc. for all LU's with settings different from the component value. MOD module based options like optimization level, line size, prime character, etc. for all modules with settings different from the component value.

PRINT keywords	Description
<u>E</u> XCLUSION	ALL prints module and LU exclusions as well as exclusions from module statistics LU prints LU exclusions MOD prints module exclusions MODSTAT prints exclusions from module statistics
<u>S</u> ELECTION	ALL prints LU selections as well as selections for module statistics LU prints LU selections MODSTAT prints selections for module statistics

16.1.2 Utility Output

The utility output is self-explanatory. Error messages should be checked carefully. The utility ends with return code 0 if everything ran correctly. It will otherwise end with a return code 4.

16.2 Batch Command Utility

The batch command utility ABLBAT is used to process commands (except for DISPLAY) in a batch environment. Usually, this is done during installation or to correct an optimization option before the next startup.

Any of the commands START, STOP, SET, EXCLUDE, INCLUDE, SELECT, or UNSELECT that are executed in batch mode by program ABLBAT, which specify neither the option P<ERMANENT> nor T<EMPORARY>, will default to P<ERMANENT>.

16.2.1 Required JCL

The required JCL is distributed within the sample JCL member ABLBATC.

16.2.2 Control Statements

The following rules must be adhered to when entering ABLBAT control statements:

- Each record must contain a valid command, unless it is a continuation or comment record.
- Comments are identified by an asterisk in column 1.
- The command and possible keywords may appear in any column.
- Continuation records are assumed, unless all required keywords are entered.
- The record may be filled including column 72.
- The command and the keyword(s) must be separated by one or more blanks.
- The keywords can be entered in any sequence.

The general record format is:

```
COMMAND KEYWORD1 KEYWORD2 .. KEYWORDn-1 KEYWORDn
```

16.3 Conversion Utility

The conversion utility ABLCONV is used to copy all permanent settings from CICS OTTO VSAM file(s) of a prior release to the actual command file. This includes all exclusion and selection lists, all LU-based and component-based settings, as well as all system-wide parameters such as date formatting, user exit, etc.

The required JCL is distributed within the sample JCL member ABLCONV.

This page intentionally left blank.

APPENDIX A: TROUBLESHOOTING

A.1 Invalid Optimization

If a problem occurs, make sure that it is an optimization problem by switching off the optimization for the LU where the error occurred. If the problem persists, the following information is needed for technical support to solve the problem:

1. What kind of terminal or printer is used?
2. Does the error also occur on other terminal types?
3. Trace of the error situation on tape (see the following section).
4. Output of the Print Utility at the time of the error, to see all permanent settings.
5. A list of all PTFs that have been applied.
6. Hard copy of the screen or printout where the error occurred and a hard copy for the same correct screen or printout.

A.2 Trace Control Using DD OTTOTRCS

CICS OTTO will trace all input and output messages before and after optimization for those components for which the trace facility was activated using the TRACE ON command. The trace file written to DDNAME OTTOTRCS is opened when a TRACE ON command is issued and closed when a TRACE OFF command is issued.

➔ **Note:** The trace file should be printed before another TRACE ON command is issued. If this is not done, the trace information previously written may be lost.

In the case of an output message, the TRACE BEFORE OPTIMIZATION entry is the original message layout as sent by the application and the TRACE AFTER OPTIMIZATION entry shows the message after the optimization process. In the case of an input message, the TRACE BEFORE OPTIMIZATION shows the message as received from the terminal and the TRACE AFTER OPTIMIZATION shows the message as passed to the application. See "Appendix D: Interpreting Message Trace DD Output" for an example and explanation of an optimization trace.

In some cases, it is necessary to take an internal trace that will additionally print some control blocks as well as relevant control blocks of the TP system. This kind of trace is invoked by adding the keyword INT to the TRACE command. Contact IBM Support before activating the trace to decide whether an internal trace is necessary to solve the problem.

A.3 SYSTEM ABENDS

In the event of a system abend, make sure that the problem is an optimization problem by examining the PSW and registers at the time of abend.

If a CICS OTTO module is involved, register 12 will point to the entry point of the module; on displacement 4 you will find an eye catcher identifying the abending module. The following information is needed for technical support to solve the problem:

1. What changes have been made to the TP system?
2. What changes have been made to CICS OTTO?
3. A tape with the original copied dump data set created by IEBGENER.
4. The Job Control of the dump tape creation.
5. Number of terminals connected to the TP system.
6. If the error can be reproduced, a CICS OTTO trace of the error situation on tape.

X37 ABENDS

B37 abends on the trace file and the statistics file can be handled automatically. During the installation process, parameter WRAP on the ABLGEN macro decides whether the output of these files should be halted in a B37 condition or if it should be wrapped around. Wrapping simply means that CICS OTTO will overwrite the file starting from the top, thus avoiding any B37 abend.

If the WRAP AROUND option was chosen, the installation guide warned against using a DISP=MOD in the DD statements for these files to avoid D37 abends. Therefore, in the event of a D37 abend, verify that the DD statement does not contain a DISP=MOD.


APPENDIX B: USER EXIT SUPPORT

The user can control the optimization using a user exit routine. This routine must be linked as ABLEX nn where nn is a numeric suffix between 00 and 90 (the numbers 91 ... 99 are reserved). Any newly linked exit routine can be dynamically activated by the SET EXIT command. Whenever a given exit is activated, it gets control for all input and output messages before and after the optimization process. A sample user exit source module is distributed as ABLEX00.

B.1 Exit Linkage Conventions

Registers upon entry to the exit module:

- R1 Parameter list address
- R13 Save area address
- R14 Return address
- R15 Entry point address

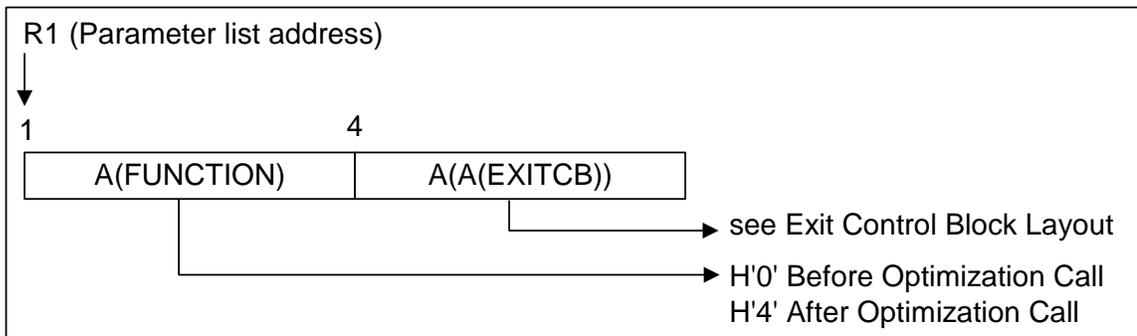

Before optimization: Register 15 return code upon return from the user exit call:

R15	3270 type LU	3600/4700 type LU	SCS type LU
0	Optimize normally	Optimize normally	Optimize normally
4	No imaging	No optimization	No optimization
8	No optimization	No optimization	No optimization
12	Optimize OUTIMAGE	No optimization	No optimization
16	Message changed	Message changed	Message changed
20	Optimize normally	No optimization	No optimization

The return code that is passed back in R15 has effect only for the current message. Changing the optimization using a return code only makes sense if a different optimization should be performed than the one used on entry to the user exit.

After optimization: If R15 is **not** zero, the original message is passed to the terminal or application. This means no optimization was done.

B.2 EXIT CONTROL BLOCK LAYOUT

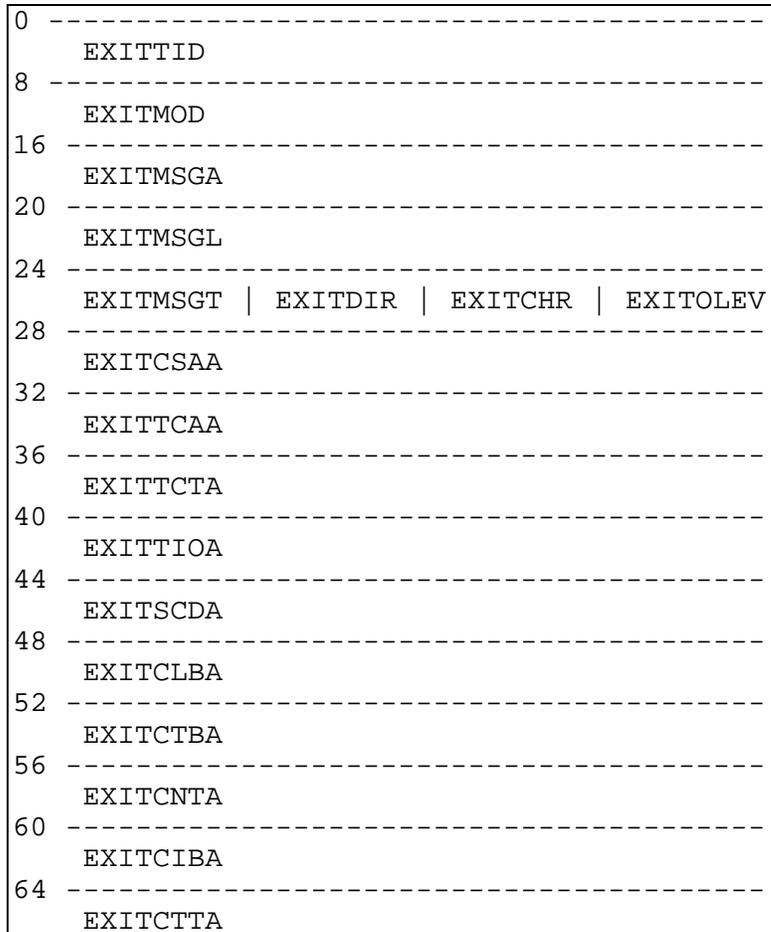


Figure 37: Exit Control Block Layout

<u>Decimal Displacement</u>	<u>Field Name</u>	<u>Field Description</u>
0	EXITTID DS CL8	Terminal identifier FIRST 4 BYTES WITH TCTTETI NEXT 4 BYTES ARE BLANK
8	EXITMOD DS CL8	Program name COPIED FROM PPT
16	EXITMSG A DS	Pointer to message
20	EXITMSGL DS F	Message length
24	EXITMSGT DS XL1	Message/LU type

Bits defined in EXITMSGT

	EXIT3270 EQU X'80'	3270-type message
	EXITSNA EQU X'40'	3600/4700 message
	EXITSCS EQU X'20'	SCS message
	EXITSCRN EQU X'08'	Screen
	EXITPRT EQU X'04'	Printer
25	EXITDIR DS XL1	Message direction

Bits defined in EXITDIR

	EXITDIRO EQU X'80'	Output message
	EXITDIRI EQU X'08'	Input message
26	EXITCHR DS CL1	For exit usage
27	EXITOLEV DS XL1	OPTIMIZATION LEVEL
	EXITOIOC EQU X'40'	OUTBOUND OPT WITH IMAGING CURRENTLY
	EXITONOC EQU X'20'	OUTBOUND OPT NO IMAGING CURRENTLY
28	EXITCSAA DS F	CSA-address
32	EXITTCAA DS F	TCA-address
36	EXITTCTA DS F	TCT-address
40	EXITTIOA DS F	TIO-address

B.3 EXIT CODING CONSIDERATIONS

The exit must be reusable. The exit runs in 31-bit addressing mode and is loaded according to its RMODE attribute. Since the exit is copied to a CICS OTTO storage area after having been loaded, you may not use relocatable symbols that are adjusted by the loader.

The only fields in the exit control block that may be changed are EXITMSGL and EXITCHR. EXITCHR may be used to keep track of control information between the BEFORE and AFTER optimization calls. The message may be changed and made longer if EXITMSGL is set correctly. The return code 16 must be used if the message is changed. It must never be made longer than the original message length before optimization.

APPENDIX C: MASS PROCESSING OF COMMANDS (ABLPCMD)

Program ABLPCMD is designed to process a given number of CICS OTTO commands. This might be useful to facilitate mass updates to the CICS OTTO command file. For example, if a large number of terminals have suddenly caused a problem, you might use ABLPCMD to temporarily or permanently exclude a large number of terminals.

All valid OTTO commands as described in this User's Guide may be passed to ABLPCMD. These commands are processed as if they had been entered using the OTTO transaction. All manipulating commands (e.g., EXCLUDE, SELECT) are immediately made available to the CICS OTTO optimization process that is running. If the command contains the keyword PERMANENT, the information is immediately written to the CICS OTTO control file. Non-manipulating commands (e.g., DISPLAY) are ignored.

The number of commands to be processed must be passed to ABLPCMD. This number may be restricted by the ICVR value defined in the SIT of CICS. If too many commands are processed by ABLPCMD (processing is performed without CICS interrupt), the program may abend with AICA. CICS OTTO has been tested with up to 32000 commands and an ICVR value of 5000 without any problems. Rather than an AICA, a Short-On-Storage condition with 64000 commands that resided below the 16 MB line was caused.

C.1 Calling ABLPCMD

ABLPCMD may be called by any program running under CICS using the following instruction:

```
EXEC CICS LINK PROGRAM('ABLPCMD') COMMAREA(PARMAREA) LENGTH(16)
```

PARMAREA must contain the addresses of the following four areas, which are needed by ABLPCMD:

1. Address of a fullword containing the number of passed commands.
2. Address of a fullword containing the address of the first command. The commands are expected to be padded with blanks and every command line must be 80 characters long. The next command line must follow immediately.
3. Address of a fullword that is used by ABLPCMD to pass the return code to the caller.
4. Address of a fullword that will contain the number of commands which were not successfully processed by CICS OTTO.

Details pertaining to the assembler definition of PARMAREA begin on the next page.

In assembler language, the PARMAREA must be defined as follows:

```

PARMAREADS 0A
PARMNOA DS  A      Address of fullword: number of commands
PARMCMDADS A      Address of first command line
PARMRCA DS  A      Address of fullword: return code from ABLPCMD
PARMCTA DS  A      Address of fullword: error count from ABLPCMD

```

The areas referred to in PARMAREA must be defined as follows:

```

NUMCMDS  DS  F      Number of commands to be processed
RETCODE  DS  F      Return code from ABLPCMD
ERRCOUNT DS  F      Number of commands which have not been processed
COMMANDS DS  xCL80  where x = NUMCMDS

```

Every command line contains a valid CICS OTTO command and must be padded with blanks. ABLPCMD uses the first 72 characters to extract the command. The last 8 characters are used by ABLPCMD in case of a failing command to pass the error-message-ID to the caller. This ID is the same as described in Chapter 2 of the *CICS OTTO Message Guide*. For example, ABL6305I means entry already exists in list (for any EXCLUDE or SELECT command).

All passed areas may reside below or above the 16 MB line.

The following table lists the return codes of ABLPCMD:

Table 5: ABLPCMD Return Codes

RC	Description
00	All commands have been processed successfully
04	At least one command failed: use the error count and the last 8 characters of the command lines to determine the kind of error
08	CICS OTTO is actually servicing another command. Issue a WAIT and try again.
12	The passed number of commands is not positive. Fill in the correct value.
16	Program ABLEXIT is not available. Check whether CICS OTTO is installed and initialized properly.
20	Control block OTCB is not available. Check whether CICS OTTO is installed and initialized properly.
24	Internal error. Command processor CM00 is not available.
28	Internal error. Bad return from loading command modules.

Note: Return codes 16 – 28 should not occur. If CICS OTTO is correctly installed and initialized and you get a return code higher than 12, a dump is needed for further problem determination. For this purpose, ABLPCMD contains statements to force a transaction abend. The resulting transaction dump with an abend code of ABL0, ABL4, ABL6, or ABL8 should be passed to your support center.

C.2 Defining ABLPCMD to CICS

Define ABLPCMD with the following options:

- Language Assembler
- Data Below
- EXECKEY CICS
- Resident No

This page intentionally left blank.

Return Code	Description
320004D2	Data stream not modified
320004D3	Optimized message longer than original + increment value
320008A1	Insufficient space for image buffer (IBB)
320008A2	Insufficient space for image buffer (IBA)
320008B1	Data stream is neither inbound nor outbound
320008C1	Terminal is neither printer nor screen
320008C2	Inbound data stream from printer arrived
320008C3	Unexpected return code from buffer management module (no pool generated or internal error (message area = compression area))
320008C4	Return code 0 from OTTO3205 not supported
320008C5	Return code 8 from OTTO3205 not supported
320008C8	Image deletion requested by interface
320008D1	Terminal is neither printer nor screen
320008D3	Unexpected return code from buffer management
32030800	Image after eliminating gaps longer than before
320518B1	Image of zero length produced: old one deleted
321104A0	Data stream with zero length arrived
321104A1	Not optimized because order found (05,11,12,13,1D,28,29,2C or 3C)
321104A2	Old DBCS field
321104A3	WCC C8 indicates no line size given. In this case linesize should have been set with SET LINESIZE.
321104A4	Data for command F1 could not be optimized because start of line could not be located
321104A5	Found two consecutive SI without SO
321104A6	Found two consecutive SO without SI
321104B1	Data stream not modified
321104C1	Optimized message longer than original
322000A1	Optimization switched off for this message
322004D3	Structured field longer than data stream. A structured field length is larger than the remaining length of the data stream.
322008A2	Insufficient space for image buffer (IBA)

Return Code	Description
322008D1	Insufficient space for structured field
322100A1	Imaging switched off for this message
322100B1	Nothing to optimize (inbound data stream)
322100C1	Normal completion
322200B2	Normal completion
322200C1	Normal completion
322200D3	Normal completion
322200F2	Normal completion
322200F4	Normal completion
322204A2	Inbound data stream has incorrect partition identifier
322204A4	Partition identifier not found
322204A6	Unknown AID in inbound data stream
322204B1	No screen image defined
322204D1	No screen image defined
322204F1	No screen image defined
322204F3	No screen image defined
322208A1	Implicit partition 0 not found
322208A3	Explicit partition 0 not found
322208D4	SFE without basic attribute in an inbound data stream which is the result of a Read Buffer. This cannot occur with a valid 3270 device.
322208D5	Incomplete Read Buffer. A Read Buffer (RB) data stream was found to be too short (not all data was read from the buffer) or too long (more data was read than the buffer should contain).
322208D7	Data stream contains both SF and SBA. An inbound data stream contains both Start Field and Set Buffer Address orders. This is not valid for inbound data streams.
322208D8	Data stream SBA out of sequence. An SBA was encountered in the inbound data stream whose address was less than the address of the preceding SBA. This is not valid for inbound data streams unless the address is zero (X'4040')
322208D9	SBA found but not at start of data. An SBA at the beginning of the inbound data stream indicates a formatted ReadModified (RM) data stream. If no SBA is present at the beginning of the data stream, the data stream is unformatted

Return Code	Description
	and cannot contain other SBA orders.
322308C6	UDB's after read buffer input
323000A1	Optimization switched off
323004C1	Unknown command code
323004D3	Invalid structured field length. A structured field was present in the outbound data stream which was longer than the remaining length of the data stream.
323004D4	Invalid structured field. An unknown or invalid structured field was detected.
323008A2	Insufficient space for image buffer (IBA)
323008D1	Insufficient space for structured field
323104A1	Invalid command code
323104D6	Optimized data greater IOAL
323104F2	EW(A) if reset_incomplete, leads to image deletion and take old msg
323104F7	Reset_incomplete but data stream not modified
323200B2	Normal completion
323200C1	Normal completion
323200D2	Normal completion
323204A2	Data stream has incorrect partition identifier
323204A4	Explicit partition not found
323204A5	Image critical and EW(A)
323204A6	Unknown command code
323204B1	No screen image defined
323204C2	Reset_incomplete and EW(A)
323204D1	No screen image defined
323208A1	Implicit partition 0 not found
323208A3	Explicit partition 0 not found
323304C1	Data gone beyond partition
323304DC	Data stream field longer than image field. A field was present in the inbound data stream that was longer than the field that was last sent to the screen at that location.

Return Code	Description
323304DD	Data stream protected field shorter than image field. A field was found in the inbound data stream which was shorter than the field last sent to the device. This is not valid if the field is protected.
323304DE	Unexpected double-byte-character-set (DBCS) data. This is usually found if the CICS OTTO DBCS Option is not set and DBCS Data is to be written to the screen. Switch the CICS OTTO DBCS Option on to avoid this error code.
323304DF	Data stream protected field differs from image field. An inbound field which is protected has been changed since the data was last sent to the screen. This is not possible with a valid 3270 device.
323304E6	SBA-order incomplete
323304E6-EA 323304ED-EE 323308EB	Truncated parameter list. An inbound data stream ended with an incomplete 3270 order.
323304E7	SF-order incomplete
323304E8	SFE-order incomplete
323304E9	MF-order incomplete
323304EA	RA-order incomplete
323304EB	Character attributes not supported
323304EC	Invalid repeat character follows RA-order
323304ED	EUA-order incomplete
323304EE	SA-order incomplete
323304EF	Character attributes not supported
323308D1 323504F3	Invalid DBCS field. A DBCS field was detected that has an odd number of bytes .
323308D2 323504F4	Invalid DBCS character. An invalid DBCS character was detected. Valid DBCS characters are: X'4040' to X'FEFE'.
323308D3	Invalid data stream order. An invalid 3270 data stream order was detected. If this was an SCS Printer data stream, then an invalid set function, MPP, left and right margins, or horizontal tab were specified.
323308DB	Unprotected field too long in an inbound data stream which is the result of a Read Buffer. The incoming field is longer than the outgoing field which cannot occur with a valid 3270 device.

Return Code	Description
323308E0	Invalid attribute value. An invalid attribute value was found for an attribute type other than Character Set in an MF, SA, or SFE order.
323308E1	Invalid graphic escape character. An invalid Graphic Escape (GE) order was detected. Valid values are: X'40' to X'FE'.
323308E2	Invalid character set. An invalid LCID was found in the attribute value field of an attribute type Character Set (programmed symbols) in an MF, SA, or SFE order. This value must be: X'00' or X'40' to X'FE'.
323308E3	Invalid attribute type. An invalid attribute type was detected in an MF, SA, or SFE order. Valid attribute types are <ul style="list-style-type: none"> • 3270 Field Attributes • Extended Highlighting • Extended Color • Character Set • Field Outlining • Background Transparency • Field Validation
323308E4	Target of a modify field is not an attribute. The target of a MF order must be an attribute byte. In this case, the target was not an attribute byte.
323308E5	Invalid address. An invalid buffer address was detected in an EUA, RA, or SBA order. One of the following conditions was found: <ul style="list-style-type: none"> • Address unknown • Address larger than the current device buffer size
323308E7	SICF pool full
323308E8	SICF pool full
323308EA	Invalid repeat character. An invalid repeat character was specified for an RA (Repeat-to-Address) order. The valid repeat characters are: X'00' and, X'40' to X'FE'.
323308EB	GE-order incomplete
323308EC	Unexpected incoming field. The incoming field may be an unmodifiable field or it may reference a position on the screen for which no field has been created by the preceding outbound data stream.
323308F2	SICF pool full
323504D4	Uneven double-byte-character-set (DBCS) field
323504D5	Wrap-around DBCS field not supported

Return Code	Description
323504D6	Uneven DBCS field
323504F1	Invalid Shift Out/Shift In pairing. A Shift Out/Shift In (SO/SI) pair was detected that is invalid or incomplete. The SO and SI orders must appear as pairs in the terminal buffer.
323504F2	Invalid DBCS sub-field. A DBCS sub-field was detected that has an odd number of bytes . This is usually found in conjunction with SO/SI orders.
323604D4	Uneven DBCS field
323904A1	DBCS data stream cannot be optimized because there is no image available and the command code is a WRITE without ERASE
323904A2	Invalid command code
323904DE	DBCS switched off, no image available, 43F/FE01/SO found
324004A1	Incorrect INOP in READ PARTITION
324004B2	Incorrect partition identifier (screen is in base state)
324004B4	Incorrect partition identifier (screen is in partitioned state)
324008B1	Implicit partition 0 not found
324008B3	Explicit partition 0 not found

This page intentionally left blank.

APPENDIX E: SABLLOAD – ALIAS LIST

An alias exists for many of the product modules and members. This means that each module may be referred to in the manuals or within the modules themselves by a prefix that begins with ABL and one that begins with an alias (OTTO). All alias's are listed in a data set called SABLLOAD.

The following is a list of all alias names found in SABLLOAD.

Alias	Module/Member Name
OTTOBAT	ABLBAT
OTTOCONV	ABLCONV
OTTOEX00	ABLEX00
OTTOEXIT	ABLEXIT
OTTOH01	ABLH01
OTTOH02	ABLH02
OTTOH04	ABLH04
OTTOH05	ABLH05
OTTOH06	ABLH06
OTTOH07	ABLH07
OTTOH08	ABLH08
OTTOH09	ABLH09
OTTOH10	ABLH10
OTTOH11	ABLH11
OTTOH12	ABLH12
OTTOH13	ABLH13
OTTOH14	ABLH14
OTTOH15	ABLH15
OTTOH16	ABLH16
OTTOH17	ABLH17
OTTOH18	ABLH18
OTTOH19	ABLH19
OTTOH20	ABLH20
OTTOH21	ABLH21
OTTOH23	ABLH23
OTTOH26	ABLH26
OTTOM00	ABLM00
OTTOM01	ABLM01
OTTOM02	ABLM02
OTTOM03	ABLM03
OTTOM04	ABLM04
OTTOM05	ABLM05
OTTOM06	ABLM06
OTTOM07	ABLM07

OTTOM08	ABLM08
OTTOM09	ABLM09
OTTOM10	ABLM10
OTTOM11	ABLM11
OTTOM12	ABLM12
OTTOM13	ABLM13
OTTOM14	ABLM14
OTTOM15	ABLM15
OTTOM16	ABLM16
OTTOM17	ABLM17
OTTOM18	ABLM18
OTTOM19	ABLM19
OTTOM20	ABLM20
OTTOM21	ABLM21
OTTOM23	ABLM23
OTTOM24	ABLM24
OTTOM25	ABLM25
OTTOM26	ABLM26
OTTOMA23	ABLMA23
OTTOMAIN	ABLMMAIN
OTTOMC00	ABLMC00
OTTOPCMD	ABLPCMD
OTTOSNAI	ABLSNAI
OTTOSTOP	ABLSTOP
OTTOSTRT	ABLSTRT
OTTOTSTA	ABLTSTA
OTTOTSTP	ABLTSTP

APPENDIX G: TECHNICAL SUPPORT CHECKLIST

If you encounter a problem that you cannot solve, please contact IBM Support. To help us to provide the best possible service to you, please consider the following checklist before you contact our office. Our contact information was provided on page xi.

Contact name: _____

Contact telephone: _____

Product version and release number: _____

CICS version and release number: _____

Model of computer on which the product is being used: _____

Operating system release number: _____

Other non-IBM proprietary software on your system: _____

In addition to the general information shown on the checklist, we also need specific information about the problem you are having. The "Trouble Shooting" appendix provides a list of information that is needed in order to resolve your problem. Before you contact us, please try to have this information available.

This page intentionally left blank.

APPENDIX F: NOTICES

This information was developed for products and services offered in the U.S.A.

IBM may not offer the products, services, or features discussed in this document in other countries. Consult your local IBM representative for information on the products and services currently available in your area.

Any reference to an IBM product, program, or service is not intended to state or imply that only that IBM product, program, or service may be used. Any functionally equivalent product, program, or service that does not infringe any IBM intellectual property right may be used instead. However, it is the user's responsibility to evaluate and verify the operation of any non-IBM product, program, or service.

IBM may have patents or pending patent applications covering subject matter described in this document. The furnishing of this document does not give you any license to these patents. You can send license inquiries, in writing, to:

IBM Director of Licensing
IBM Corporation
North Castle Drive
Armonk, NY 10504-1785
U.S.A.

For license inquiries regarding double-byte (DBCS) information, contact the IBM Intellectual Property Department in your country or send inquiries, in writing, to:

IBM World Trade Asia Corporation Licensing
2-31 Roppongi 3-chome, Minato-ku
Tokyo 106, Japan

The following paragraph does not apply to the United Kingdom or any other country where such provisions are inconsistent with local law:

INTERNATIONAL BUSINESS MACHINES CORPORATION PROVIDES THIS PUBLICATION "AS IS WITHOUT WARRANTY OF ANY KIND, EITHER EXPRESS OR IMPLIED, INCLUDING, BUT NOT LIMITED TO, THE IMPLIED WARRANTIES OF NON-INFRINGEMENT, MERCHANTABILITY OR FITNESS FOR A PARTICULAR PURPOSE. Some states do not allow disclaimer of express or implied warranties in certain transactions; therefore, this statement may not apply to you.

This information could include technical inaccuracies or typographical errors. Changes are periodically made to the information herein; these changes will be incorporated in new editions of the publication. IBM may make improvements and/or changes in the product(s) and/or program(s) described in this publication at any time without notice. Any references in this information to non-IBM Web sites are provided for convenience only and do not in any manner serve as an endorsement of those Web sites. The materials at those Web sites are not part of the materials for this IBM product and use of those Web sites is at your own risk.

IBM may use or distribute any of the information you supply in any way it believes appropriate without incurring any obligation to you.

Licensees of this program who wish to have information about it for the purpose of enabling: (i) the exchange of information between independently created programs and other programs (including this one) and (ii) the mutual use of the information which has been exchanged, should contact:

IBM United Kingdom Limited
Intellectual Property Department
Hursley Park
Winchester SO21 2JN
United Kingdom

Such information may be available, subject to appropriate terms and conditions, including, in some cases, payment of a fee.

The licensed program described in this information and all licensed material available for it are provided by IBM under terms of the IBM Customer Agreement, IBM International Program License Agreement, or any equivalent agreement between us. Any performance data contained herein was determined in a controlled environment. Therefore, the results obtained in other operating environments may vary significantly. Some measures may have been made on development-level systems, and there is no guarantee that these measurements will be the same on generally available system. Furthermore, some measurements may have been estimated through extrapolation. Actual results may vary. Users of this document should verify the application data of their specific environment.

Information concerning non-IBM products was obtained from the suppliers of those products, their published announcements or other publicly available sources. IBM has not tested those products and cannot confirm the accuracy of performance, compatibility or any other claim related to non-IBM products.

Questions on capabilities of non-IBM products should be addressed to the suppliers of those products.

This information contains examples of data and reports used in daily business operations. To illustrate them as completely as possible, the examples include names of individuals, companies, brands, and products. All of these names are fictitious and any similarity to the names and addresses used by an actual business enterprise is entirely coincidental.

Trademarks

The following terms are trademarks of the International Business Machines Corporation in the United States or other countries, or both.

CICS IBM z/OS

Other company, product, and service names may be trademarks or service marks of others.

This page intentionally left blank.

INDEX

—3—

3179/3192 C field
 3270 OPT. CONTROL panel 42
3192 setting
 tuning considerations 15
3270 component optimization 41
3270 LU OPT. CONTROL Panel 51
3270 OPT. CONTROL Panel 41
3270 Optimization Techniques 5
3600 LU OPT. CONTROL Panel 52
3600 PRIME COMPR. CHARACTER field
 3600/SCS OPT. CONTROL panel 45
3600 terminals
 component based optimization 44
3600/4700 compression 7
3600/4700 Optimization Techniques 7
3600/SCS Component Based Optimization
 52
3600/SCS OPT. CONTROL Panel 44

—A—

AABLINST 9
abends 112
ABLACCPT 9
ABLALLOC 9
ABLAPPLY 9
ABLASML 9
ABLBAT 108, 129
ABLBATC 9
ABLBATC JCL member 108
ABLCASM 9
ABLCONV 109, 129
ABLDDDEF 9
ABLEX00 129
ABLEXIT 129
ABLH01 129
ABLH02 129
ABLH04 129
ABLH05 129
ABLH06 129
ABLH07 129

ABLH08 129
ABLH09 129
ABLH10 129
ABLH11 129
ABLH12 129
ABLH13 129
ABLH14 129
ABLH15 129
ABLH16 129
ABLH17 129
ABLH18 129
ABLH19 129
ABLH20 129
ABLH21 129
ABLH23 129
ABLH26 129
ABLM00 129
ABLM01 129
ABLM02 129
ABLM03 129
ABLM04 129
ABLM05 129
ABLM06 129
ABLM07 129
ABLM08 129
ABLM09 130
ABLM10 130
ABLM11 130
ABLM12 130
ABLM13 130
ABLM14 130
ABLM15 130
ABLM16 130
ABLM17 130
ABLM18 130
ABLM19 130
ABLM20 130
ABLM21 130
ABLM23 130
ABLM24 130
ABLM25 130
ABLM26 130
ABLMA23 130

- ABLMMAIN 105, 130
- ABLMC00 130
- ABLOCS0 9
- ABLPCMD 117, 130
- ABLRECV 9
- ABLSMPSU 9
- ABLSNAI 130
- ABLSNAI module 7
- ABLSTOP 130
- ABLSTRT 130
- ABLTSTA 12, 130
- ABLTSTP 12, 130
- ABLVSAMJ 9, 17
- accessing the system 21
- alias list 129
- allocation
 - image pool 39
- AMERICAN dates 32
- Application-ID field
 - SYSTEM OPTIONS panel 32
- average image length 39
- Average image length
 - IMAGE POOL panel 38

—B—

- B37 abend
 - statistics file 19
 - trace file 18
- B37 abends 112
- BASE COLOR SWITCH
 - tuning considerations 15
- Base color switch field
 - 3270 OPT. CONTROL panel 43
- batch command utility 108
- BCS setting
 - tuning considerations 15
- Blank Elimination 5, 6
 - 3270 OPT. CONTROL panel 43
- buffer addresses
 - sorting data streams by 5
- buffer area 78

—C—

- CHANGE CURRENT column
 - MODULES STATISTICS SIZE panel 93

- SYSTEM OPTIONS panel 31
- CHANGE CURRENT field
 - 3270 OPT. CONTROL panel 42
 - 3600/SCS OPT. CONTROL panel 44
- CHANGE CURRENT STATUS field
 - START/STOP panel 35, 36
- CHANGE PERM. column
 - MODULES STATISTICS SIZE panel 93
- CHANGE PERM. field
 - 3270 OPT. CONTROL panel 42
 - 3600/SCS OPT. CONTROL panel 44
- CHANGE PERM. STATUS field
 - START/STOP panel 35, 36
- checklist
 - technical support 131
- CICS Shutdown 12
- CICS Startup 11
- CICS TIOA
 - clearing for 3270 components 43
 - clearing for 3600/SCS 45
- Clear TIOA field
 - 3270 OPT. CONTROL panel 43
- CLEAR TIOA field
 - 3600/SCS OPT. CONTROL panel 45
- clearing
 - TIOA - 3270 components 43
 - TIOA - 3600/SCS 45
- clearing statistics 87
- CLOSE CONTROL FILE field
 - SYSTEM OPTIONS panel 33
- command file 16, 21
- command file OTTOCMD 106
- commands
 - function keys 22
 - performing mass updates 117
 - processing with ABLBAT 108
- comments
 - sending vii
- Compatibility Mode 103
 - defined 11
- component based optimization
 - 3270 components 41
 - 3600/SCS components 44
 - SCS printers 44
- Component Based Optimization Control 3
- COMPONENT field

- START/STOP panel 36
- COMPONENT STATISTICS Panel 97
- components
 - starting/stopping optimization 35
- Compress images field
 - 3270 OPT. CONTROL panel 42
- compressing
 - saved screen images 42
- compression
 - SCB 7
- contacting IBM vii
- control block layout 114
- control file 16
 - closing 33
 - status 33
- conversion utility 109
- converting
 - from a prior release 109
- CPU overhead
 - reducing 43, 45
- CPU time
 - decreasing 13
- CURRENT STATUS field
 - START/STOP panel 36

—D—

- D37 abend
 - statistics file 19
 - trace file 18
- D37 abends 112
- data stream buffer 78
- DATA STREAM DISPLAY panel 78
- data stream error codes 80
- data stream errors
 - viewing 74
- DATA STREAM ERRORS panel 74, 76
- Date formatting
 - SYSTEM OPTIONS panel 32
- DBCS support
 - SYSTEM OPTIONS panel 32
- DCB information
 - statistics file 18
 - trace file 17
- DD statements
 - statistics file 19
 - trace file 17

- DDNAME
 - OTTOSTAT 94
- defaults
 - image pool size 38
- Delete requests
 - IMAGE POOL panel 38
- DFHPLPTI 10
- DFHPLTSD 10
- DIAGNOSTICS OVERVIEW panel 73
- DISPLAY CRITERIA field
 - LU LIST panel 50
 - MOD. LIST panel 58
- DISPLAY STATISTICS MENU 94
- displaying statistics 85

—E—

- Entries field
 - LU LIST panel 50
 - MOD. LIST panel 58
 - TRACE CONTROL panel 72
- ENTRIES field
 - EXCL. LUs FROM OPT. panel 62
 - SELECT LU FOR OPT. panel 65
- ERASE/WRITE command 5
- ERROR CODES
 - running instorage trace 72
- error statistics 86
- ERROR STATISTICS Panel 101
- errors in optimization 111
- EUROPEAN dates 32
- EXCL. LUs FROM OPT. Panel 61
- EXCL. MOD'S FROM STATISTICS Panel 90
- EXCLUDE column
 - EXCL. LUs FROM OPT. panel 62
- EXCLUDE LU
 - EXCL. LUs FROM OPT. panel 62
- excluding LUs
 - from FULLY STARTED 61
- excluding modules
 - from FULLY STARTED 63
- EXCLUSIONS
 - optimization ratio 14
- exit control block layout 114
- exit program
 - activating 32
- exit routine support 113

—F—

Field Merge 5, 6
 3270 OPT. CONTROL panel 43
format for dates 32
fully started 36
FULLY STARTED mode
 excluding LUs/modules 61
function key commands 22

—G—

general parameters
 SYSTEM OPTIONS panel 31
generic notation
 using 23
GETMAIN area
 for image pool 39
grouping LUs or modules 23

—H—

hierarchy
 of control 55

—I—

IBM legal notices 133
ID field
 TRACE CONTROL panel 69
ID for logging on 21
image deletions 38
image length 38, 39
image not found 39
Image not found
 IMAGE POOL panel 38
Image not saved
 IMAGE POOL panel 38
image pool 5
 questions and answers 39
 tuning considerations 14
IMAGE POOL Panel 37
image pool size
 calculating 39
 default 37
image pool statistics 14
images
 releasing/deleting 40

imaging
 image pool size 37
Imaging 5
Imaging field
 3270 OPT. CONTROL panel 42
Inbound Data Stream Errors 82
INCLUDE column
 EXCL. LUs FROM OPT. panel 62
Input Optimization 5
INPUT OPTIMIZATION field
 3600/SCS OPT. CONTROL panel 45
installing CICS OTTO 9
instorage traces 7, 67

—J—

JCL member
 ABLCONV 109
JCL members
 ABLBATC 108
jobs
 to install CICS OTTO 9
JULIAN dates 32

—K—

KB size
 MODULE STATISTICS SIZE panel 93

—L—

legal notices 133
length of saved images 38
Length of shortest/longest image
 IMAGE POOL panel 38
light pen 42
LIGHTPEN
 tuning considerations 15
Lightpen field
 3270 OPT. CONTROL panel 42
Line Count field
 TRACE CONTROL panel 70
line length
 WCC of data streams 42
line size
 for printers 43
listing modules 57
logging on 21

- logical units
 - LU based optimization 47
- LU BASED OPT. CONTROL Panel 47
- LU based optimization 47
- LU Based Optimization Control 3
- LU column
 - EXCL. LUs FROM OPT. panel 62
 - SELECT LU FOR OPT. panel 65
- LU exclusions
 - from FULLY STARTED 61
- LU LIST Panel 49
- LU NAME field
 - LU BASED OPT. CONTROL panel 48
- LU names
 - grouping with generic notation 23
- LU STATISTICS Panel 99
- LU STATISTICS SUMMARY Panel 96

—M—

- main storage
 - changing the image pool size 37
 - reducing module statistics size 92
- main storage usage
 - reducing 32
- maintenance 16
- mass updates
 - of commands 117
- Max number of entries
 - MODULES STATISTICS SIZE panel 93
- MAXNO
 - instorage trace 71
- MF-order 43
- MOD. BASED OPT. CONTROL Panel 56
- MOD. EXCLUSIONS Panel 63
- MOD. LIST Panel 57
- modify field
 - MF order 43
- module
 - defined 86
- module based optimization control 55
- Module Based Optimization Control 4
- module based statistics 86
- module exclusions
 - from FULLY STARTED 63
- MODULE field
 - MOD. BASED OPT. CONTROL panel 56

- module names
 - grouping with generic notation 23
- MODULE OPT. CONTROL Panel 54, 59
- module selections
 - for SELECTIVELY STARTED 64
- module statistics 86
- MODULE STATISTICS Panel 100
- MODULE STATISTICS SIZE Panel 92

—N—

- Name of user exit
 - SYSTEM OPTIONS panel 32
- native commands 103
 - using 11
- New Line order 5
- NEXT LU field
 - 3270 LU OPT. CONTROL panel 51
 - 3600 LU OPT. CONTROL panel 52
 - LU OPT. CONTROL panel 54
 - SCS LU OPT. CONTROL panel 53
- notation, generic 23
- notices 133
- Number of entries generated
 - MODULES STATISTICS SIZE panel 93
- Number of entries used
 - MODULES STATISTICS SIZE panel 93
- NUMBER OF INPUT BYTES 98
- NUMBER OF INPUT MESSAGES 98
- NUMBER OF OUTPUT BYTES 98
- NUMBER OF OUTPUT MESSAGES 97
- Number of slots generated
 - IMAGE POOL panel 38
- Number of slots in use
 - IMAGE POOL panel 38

—O—

- Opt.as SCS / 3270 field
 - 3600/SCS OPT. CONTROL panel 45
- optimization 13
 - 3270 component based 41, 51
 - 3600/SCS component based 44, 52, 53
 - increasing 13
 - LU based 47
 - module based control 55
 - reducing CPU time 13

- starting/stopping 35
- tuning considerations 13
- optimization errors 111
- optimization features
 - defining for modules 56
- optimization ratio 13
- optimization status
 - starting/stopping 35
- OPTION field
 - examples of using 28
 - how to use 22
 - TRACE CONTROL panel 68
- OSTA transaction 12
- OSTO transaction 12
- Otto mod's loaded field
 - SYSTEM OPTIONS panel 32
- OTTOCMD 105
- OTTOCMD JCL member 106
- OTTOM00 26
- OTTOM01 27
- OTTOM02 35
- OTTOM04 37
- OTTOM05 41
- OTTOM06 44
- OTTOM07 47
- OTTOM08 49, 57
- OTTOM09 56
- OTTOM10 51
- OTTOM11 52
- OTTOM12 53
- OTTOM13 54, 59
- OTTOM14 61, 63, 64, 90, 91
- OTTOM15 67
- OTTOM16 31
- OTTOM17 87
- OTTOM18 92
- OTTOM19 94
- OTTOM20 96
- OTTOM21 97, 99, 100
- OTTOM23 73
- OTTOM24 74, 76
- OTTOM25 78
- OTTOM26 101
- OTTOSTAT 94
- OTTOTRCS DD statement 17
- Outbound Data Stream Errors

Instorage Trace 80

—P—

- PAGESIZE field
 - TRACE CONTROL panel 69
- panel layout
 - general 29
- parameters
 - SYSTEM OPTIONS panel 31
- PCT entry
 - for system access 21
- PERMANENT field*
 - EXCL. LUs FROM OPT. panel 62
 - SELECT LU FOR OPT. panel 65
- permanent settings 21
- PERMANENT STATUS field
 - START/STOP panel 36
- pool shortage 38
- pool size 37
 - default 37
- pool statistics 14
- PRIMARY OPTION MENU
 - using 27
- print utility 105
- Printer linesize
 - 3270 OPT. CONTROL panel 43
- printer statistics 85
- priority
 - of control 55
- problem analysis 111
 - image pool questions 39
- processing parameters
 - SYSTEM OPTIONS panel 31
- Program ABLPCMD 117
- program name 32
- Program Tab 6
- PT-order 6

—Q—

- questions
 - about the image pool 39

—R—

- RA-order 5
- READ BUFFER 6

- reducing
 - CPU overhead 43, 45
 - main storage - module statistics size 92
 - main storage usage 32
 - output optimization ratio 43
- registers
 - exit modules 113
- release
 - converting from a prior release 109
- Repeat to Address 5
- reports
 - statistics 85
- restarting CICS OTTO 12
- Restricted size
 - MODULES STATISTICS SIZE panel 93
- return codes 107
- runtime considerations 16

—S—

- SABLCCMD 16
- SABLCCMOD 16
- SABLOAD 129
- SCB compression/decompression 7
- SCB data compression 7
- screen imaging
 - image pool size 37
- SCS linesize field
 - 3600/SCS OPT. CONTROL panel 45
- SCS LU OPT. CONTROL Panel 53
- SCS Optimization Techniques 6
- SCS printers
 - component based optimization 44
- SCS setting
 - tuning considerations 15
- SEL. MOD'S FOR STATISTICS Panel 91
- SELECT column
 - SELECT LU FOR OPT. panel 65
- SELECT LU field
 - SELECT LU FOR OPT. panel 65
- SELECT LUs FOR OPT. Panel 64
- selecting LUs
 - for SELECTIVELY STARTED 64
- selective optimization 36
- selectively started 36
- SELECTIVELY STARTED mode
 - selecting LUs for inclusion 61

- Set 3192
 - tuning considerations 15
- Set BCS
 - tuning considerations 15
- SET EXIT command 113
- Set Horizontal Format 6
- Set LIGHTPEN
 - tuning considerations 15
- SET SCS
 - tuning considerations 15
- Set TERMNO
 - tuning considerations 16
- Set ZERO-MF-ALLOWED
 - tuning considerations 15
- SHF-orders 6
- shortage deletions 39
- Shortage deletions
 - IMAGE POOL panel 38
- Size in KB
 - MODULES STATISTICS SIZE panel 93
- slot size
 - default 37
- SLOT size 39
- Slot size in bytes
 - IMAGE POOL panel 38
- slots generated
 - IMAGE POOL panel 38
- slots in use
 - IMAGE POOL panel 38
- space for statistics file
 - formula 18
- start modes
 - exclusions and selections 61
- start options
 - tuning consideration 14
- Start Panel 26
- START/STOP Panel 35
- started fully
 - excluding LUs/modules 61
- started selectively
 - selecting LUs for inclusion 61
- starting optimization 35
- starting statistics 87
- starting trace 69
- statistics 85
 - printing or displaying 94

- starting 87
- STATISTICS CONTROL Panel 87
- statistics file 18
- status
 - starting/stopping 35
- STATUS OF OTTO CONTROL FILE field
 - SYSTEM OPTIONS panel 33
- STOP ON ERROR
 - instorage trace 71
- stopping CICS OTTO
 - temporarily for restart 12
- stopping optimization 35
- stopping statistics 87
- stopping trace 69
- String Control Blocks 7
- system abends 112
- system command file 21
- SYSTEM OPTIONS Panel 31
- system parameters
 - SYSTEM OPTIONS panel 31

—T—

- technical support 131
- Technical Support Checklist 131
- temporary settings 21
- terminal statistics 85
- terminals
 - 3179 and 3192 type 42
 - used with light pen 42
 - using BASE COLOR SWITCH 43
- TERMNO setting
 - tuning considerations 16
- TIOA
 - clearing for 3270 components 43
 - clearing for 3600/SCS 45
 - length field 43, 45
- TIOADL 43, 45
- TITLE field
 - TRACE CONTROL panel 70
- Total control block size in KB
 - MODULE STATISTICS SIZE panel 93
- TOTAL NUMBER OF BYTES 98
- Total pool size
 - IMAGE POOL panel 38
- trace
 - problem analysis 111

- trace control
 - problem analysis 111
- TRACE CONTROL Panel 67
- trace DD output
 - example 121
- trace file 17
- TRACE ON 17
- traces
 - starting/stopping 69
- trademarks 133
- transaction ID 21, 32
- troubleshooting 111
 - image pool questions 39
- tuning considerations 13

—U—

- UNSELECT column
 - SELECT LU FOR OPT. panel 65
- User exit active field
 - SYSTEM OPTIONS panel 32
- user exit program
 - activating 32
- user exit routine support 113
- user exits
 - tuning considerations 14
- utility
 - for converting from a prior release 109
 - for printing 105

—V—

- VSAM command file 16
- VSAM control file 16

—W—

- WCC 5
- WCC-ignore field
 - 3270 OPT. CONTROL panel 42
- WCC-IGNORE option 5
- WRAP AROUND
 - instorage trace 70
- WRAP AROUND option
 - B37 abend 112
 - statistics file 19
 - trace file 18
- wrapping

B37 abend 112
statistics file 19
trace file 18
Write Control Character 5
writing statistics 85

—X—

x37 abends 112

—Z—

Zero MF order allowed field
3270 OPT. CONTROL panel 43
ZERO-MF-ALLOWED
tuning considerations 15

Sending your comments to IBM

If you especially like or dislike anything about this book, please use one of the methods listed below to send your comments to IBM.

Feel free to comment on what you regard as specific errors or omissions, and on the accuracy, organization, subject matter, or completeness of this book.

Please limit your comments to the information in this book and the way in which the information is presented.

To ask questions, make comments about the functions of IBM products or systems, or to request additional publications, contact your IBM representative or your IBM authorized remarketer.

When you send comments to IBM, you grant IBM a nonexclusive right to use or distribute your comments in any way it believes appropriate, without incurring any obligation to you.

You can send your comments to IBM in any of the following ways:

- By mail, to this address:
User Technologies Department (MP095)
IBM United Kingdom Laboratories
Hursley Park
WINCHESTER,
Hampshire
SO21 2JN
United Kingdom
- By fax:
 - From outside the U.K., after your international access code use 44–1962–816151
 - From within the U.K., use 01962–816151
- Electronically, use the appropriate network ID:
 - IBM Mail Exchange: GBIBM2Q9 at IBMMAIL
 - IBMLink™™: HURSLEY(IDRCF)
 - Internet: idrcf@hursley.ibm.com

Whichever you use, ensure that you include:

- The publication title and order number
- The topic to which your comment applies
- Your name and address/telephone number/fax number/network ID.